
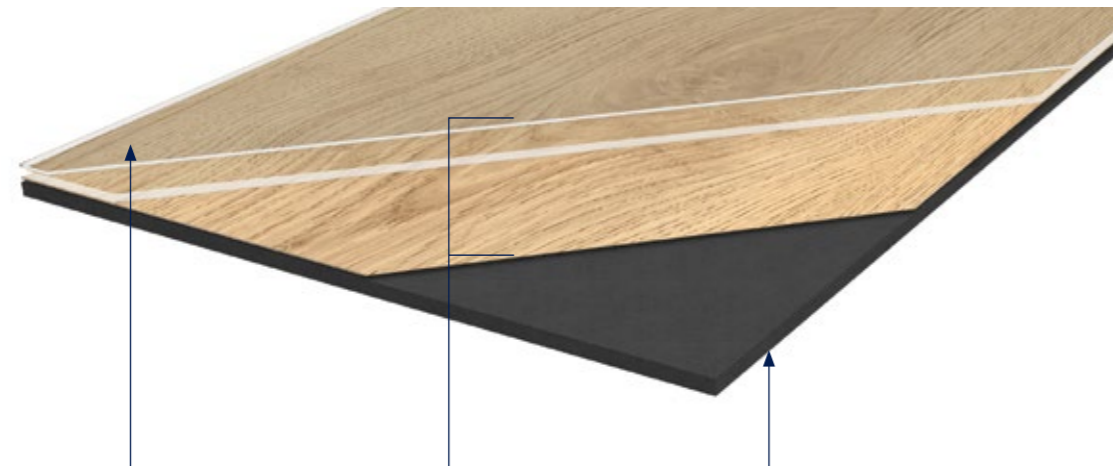


Creation Tiles & planks

Creation 40



PROTECSHIELD™

ENHANCED PERFORMANCES



ULTRA MATT SURFACE



4D DESIGN

CRYSTAL WEAR LAYER



HIGH DEFINITION PRINTED FILM



STRUCTURED EMBOSS



BEVELLED EDGES





RESILIENT COMFORT CORE



Creation Tiles & planks decoratives strips

Format (mm) 4×914mm

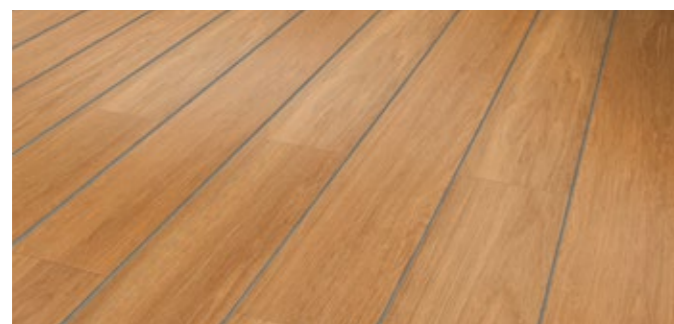

Code: 3203 + Color code

✓ REACH
100% Reach Phthalate free

♻️
100% Recyclable
Up to 35% recycled content

🦋
TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Formats (mm) 184×1219 230×1500 610×610 457×914



Creation 40

Creation 40 Trend is a synthetic, decorative, flexible, antistatic abrasion group T floorcoverings available in tile or plank, with bevelled edges. It consists in a 0,4 mm thick transparent wear layer, a design film and a Resilient Comfort Core to provide softness and comfort surface. The overall thickness is 2 mm. They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and prevent from micro scratches.

Creation 40 Trend is a glued floorcovering, resistant to use (residential / commercial use) of 23 / 32 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 40 Trend is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 35% of recycled content. It is 100% compliant with REACH.

The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).

Can be combined with pre-adhesive underlayer

Gerflor Smart Fix 16 dB



Code: 1698 - Format: 1m x 7.5m

Please refer to Gerflor's installation guidelines.

Creation 40

Creation 40 Trend

Description

Total thickness	EN ISO 24346	mm	2
Thickness of wearlayer	EN ISO 24340	mm	0.40
Weight	EN ISO 23997	g/sqm	3 180
Size	EN ISO 24342	mm	Planks - 184,15×1219,2 / 230×1500 Tiles - 457,2×914,4 / 609,6×609,6
Number of planks / tiles and sqm per box	-	-	21-13-11-13 / 4,71-4,49-4,6-4,83

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 32 - 41
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	77
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.25
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®

CE marking




EN 14041



Creation Tiles & planks

Creation 40 Solid Clic



Formats (mm) 212x1238 240x1461 388x729 |



Creation 40 Solid Clic

Creation 40 Solid Clic is a decorative, flexible, abrasion group T floorcoverings available in tiles and planks, with bevelled edges. It consists in a 0,45 mm thick transparent wear layer, a design film of 2 m width printed in high definition to have more variety in the design and the technology "Duo Core 2.0": combination of a rigid core back layer for easy renovation and a flexible core top layer to provide softness and comfort surface, the whole with a double reinforcement for enhanced durability. The overall thickness is 4,5 mm. They benefit from a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier and avoiding microscratches.

Creation 40 Solid Clic is an interlocking floorcovering assembled with a vertical system on the short side and a horizontal system on long side for a quick and solid installation. It has a European class (residential / commercial / industrial use) 23/32/41 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1. **Creation 40 Solid Clic** is made with phthalate free plasticizers (except recycled content). It is 100% recyclable and made with a recycled content up to 55%. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days - ISO 16000-6).**

To be combined with Gerflor acoustic underlayers

Gerflor Acoustic 15 dB



Code: 1798 - Format: 1m x 15ml

Gerflor Acoustic Plus 19 dB



Code: 0704 - Format: 0.98m x 15.3ml

Gerflor Silence Plus 19 dB



Code: 5949 - Format: 1.18m x 8.5ml

Please refer to Gerflor's installation guidelines.

Creation 40 Solid Clic

Description			
Total thickness	EN ISO 24346	mm	4.50
Thickness of wearlayer	EN ISO 24340	mm	0.45
Weight	EN ISO 23997	g/sqm	7118
Size	EN ISO 24342	mm	Planks - 212x1238,8 / 239,6x1460,8 Tiles - 388,8x728,7
Number of planks / tiles and sqm per box	EN ISO 24342	mm	8-7-7/ 2,10-2,45-1,98
Classification			
Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 32 -41
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 - Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	79
Impact sound insulation	EN ISO 717-2	dB	4
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.05
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
Certification	-	-	Floorscore®
CE marking			

PROTECSHIELD™

ENHANCED PERFORMANCES



ULTRA MATT SURFACE



4D DESIGN

CRYSTAL WEAR LAYER



HIGH DEFINITION PRINTED FILM



STRUCTURED EMBOSS



BEVELLED EDGES





DUOCORE 2.0 TECHNOLOGY

RESILIENT COMFORT CORE



NEW RIGID CORE



EXCLUSIVE INTERLOCKING SYSTEM

ANGULAR ON LONG SIDE



VERTICAL ON SHORT SIDE



✓ REACH

100% Reach Phthalate free

100% Recyclable Up to 55% recycled content

TVOC emissions below detection level (TVOC < 10µg/m³ after 28 days) No formaldehyde




EN 14041



Creation Tiles & planks

Creation 40 Rigid Acoustic

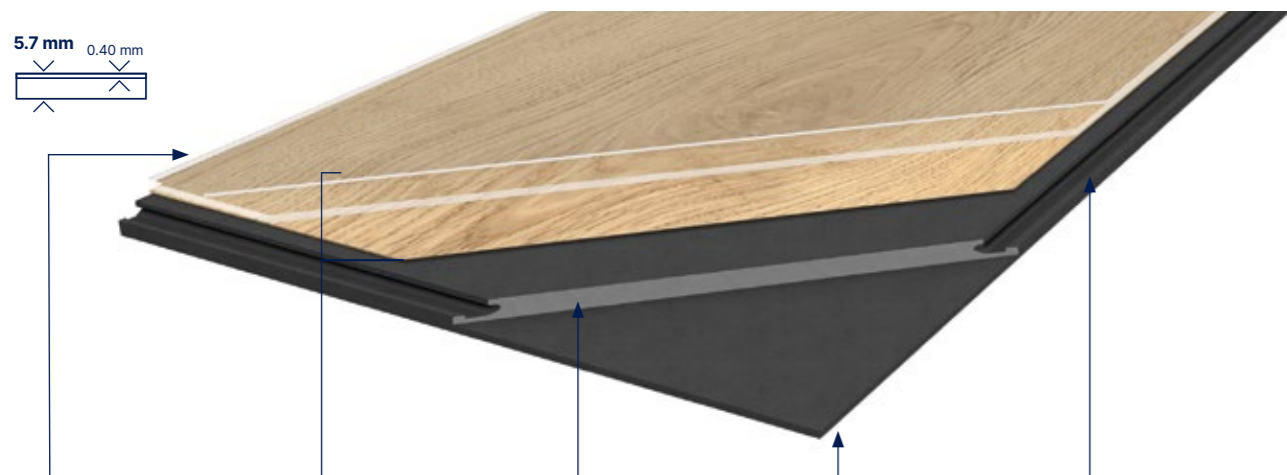

PROTECSHIELD™

ENHANCED PERFORMANCES




Micro scratch resistance



Easy maintenance

ULTRA MATT SURFACE



Natural look

4D DESIGN

CRYSTAL WEAR LAYER



Authentic Look

HIGH DEFINITION PRINTED FILM



Ultra realism

STRUCTURED EMOSS



Ultra realistic surface

BEVELLED EDGES



Tiles & Planks effect

RCB-TECHNOLOGY PATENTED



Renovation over ceramic tiles 8mm/3mm

EASY INSTALLATION



Easy to handle (7kg/m²) and easy to install (30 % lighter than standard rigid planks)



Resistance against high temperature variation

INTEGRATED ACOUSTIC UNDERLAY

ACOUSTIC UNDERLAYER



Sound insulation 19dB



Absorbs default of the subfloor (up to 1mm unevenness)

INTERLOCKING SYSTEM

ANGLE TO ANGLE LOCKING SYSTEM



Standard laminate installation

Formats (mm)

229x1250

229x1492

399x730



Creation 40 Rigid Acoustic

Creation 40 Rigid Acoustic is a decorative flooring, rigid interlocking with acoustic layer, antistatic, abrasion group T floorcoverings available in tiles and planks, with bevelled edges. It is made with:

- a 0,40 mm thick transparent wear layer to provide durability
 - a high definition printing film to provide high quality design & esthetism
 - a Rigid Composite Board Technology, new generation of rigid board with patented production process which provides a 30% less heavier product than comparable products on the market
 - an integrated underlayer 100% recyclable and which provides a 19 dB sound reduction.
- The total thickness of the product is 5,7 mm. It also

uses a cross-linked polyurethane surface treatment (**Protecshield™**), making maintenance easier, durability longer, protecting from micro scratches, and providing an ultra-mat effect for more realistic look.

Creation 40 Rigid Acoustic is an interlocking floorcovering assembled with an angle/angle locking system to provide robust and easy installation. It has an European class (residential/commercial) of 23/32 according to EN-ISO 10874 and has Bfl -s1 class for smoke emission according to EN 13501-1.

Creation 40 Rigid Acoustic is made with phthalate free plasticizers. It is 100% recyclable and made with up to 35% of recycled content. It is 100% compliant with REACH. **The product emission rate of organic compounds is < 10 microgram/m³ (TVOC < 28 days – ISO 16000-6).**



Creation 40 Rigid Acoustic

Description

Total thickness	EN ISO 24346	mm	5.70
Thickness of wearlayer	EN ISO 24340	mm	0.40
Weight	EN ISO 23997	g/sqm	7000
Size	EN ISO 24342	mm	Planks - 229x1250 / 229x1492 Tiles - 399x730
Number of planks / tiles and sqm per box	EN ISO 24342	mm	7-7-7/ 2-2,39-2,04

Classification

Norm / Product specification	-	-	EN ISO 10582
European classification	EN ISO 10874	class	23 - 32 - 41
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet: ramp test with oil	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm ³	< 2.0
Wear group	-	group	T
Type Binder content	ISO 10582	type	I
Room impact	NF S 31074	dB	80
Impact sound insulation	EN ISO 717-2	dB	19
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≤ 0.10
Residual indentation	EN ISO 24343-1	mm	≤ 0.10
Castor chair test (type H)	ISO 4918	-	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN 423	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m ³	< 10
--------------------	-------------	--------------------------	------

CE marking



EN 14041



100% Reach
Phthalate free



100% Recyclable
Up to 35% recycled content



TVOC emissions below
detection level
(TVOC < 10µg/m³ after 28 days)
No formaldehyde

Creation Tiles & planks

Creation 40

DB Creation 40 (Dry Back) **SOLID CLIC** Creation 40 Solid Clic **RIGID AC** Creation 40 Rigid Acoustic



Michigan 0461
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Quartet 0503
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250




Bostonian Oak Honey 0851
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Long Board 0455
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Bostonian Oak 0871
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

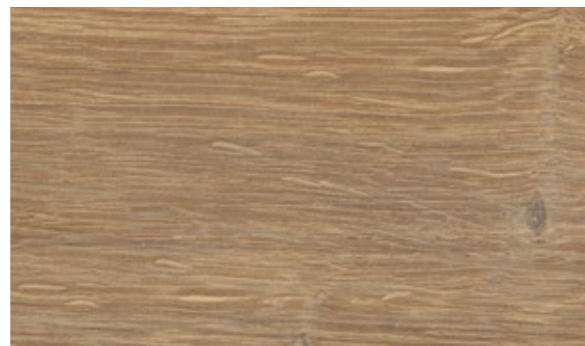

Cedar Brown 0850
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 229 × 1492



Ballerina 0347
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Swiss Oak Golden 0796
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Rustic Oak 0445
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Honey Oak 0441
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Quartet Honey 0870
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Quartet Fauve 0859
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Bostonian Oak Honey

Creation Tiles & planks

Creation 40


DB Creation 40 (Dry Back) **SOLID CLIC** Creation 40 Solid Clic **RIGID AC** Creation 40 Rigid Acoustic



Twist 0504
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Swiss Oak Beige 0848
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

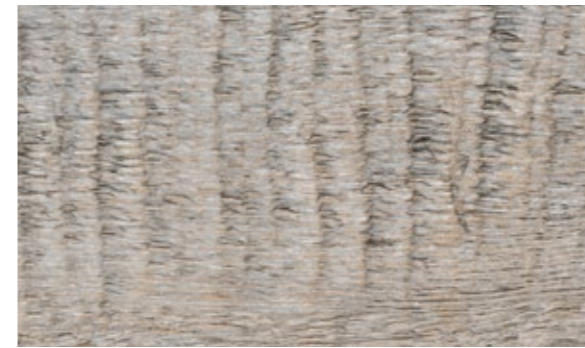

Ranch 0456
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Amador 0447
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Salento Beige 1286
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Cedar Pure 0849
DB 230 × 1500 | **SOLID CLIC** 240 × 1461 | **RIGID AC** 229 × 1492



White Lime 0584
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250




Swiss Oak Pearl 0846
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Malua Bay 0448
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Salento Light Grey 1287
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250

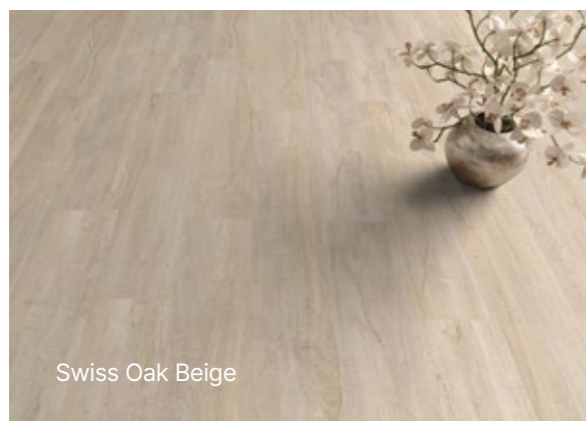

Swiss Oak Beige









Bostonian Oak Beige 0853
DB 184 × 1219 | **SOLID CLIC** 212 × 1239 | **RIGID AC** 229 × 1250



Curton Stone Light Beige

Creation Tiles & planks

Creation 40

Code	Color Design	Dry Back	Solid Clic	Rigid Acoustic	Skirting Matching Design	Coverstrip Matching Design	Emboss	NCS	LRV
									
0447	Amador	184 × 1219	212 × 1239	229 × 1250	S004	S004	Saw Effect *	5005-Y50R	25.1
0347	Ballerina	184 × 1219	212 × 1239	229 × 1250	S008	S008	Natural	4040-Y20R	28.4
0869	Bloom Uni Grey	610 × 610	389 × 729	399 × 730	S071	S071	Hammered	5005-B20G	23.2
0868	Bloom Uni Taupe	610 × 610	389 × 729	399 × 730	S072	S072	Hammered	4502-Y	28.5
0871	Bostonian Oak	184 × 1219	212 × 1239	229 × 1250	S016	S016	Natural	5020-Y20R	26.4
0853	Bostonian Oak Beige	184 × 1219	212 × 1239	229 × 1250	S017	S017	Natural	4005-Y20R	36.7
0851	Bostonian Oak Honey	184 × 1219	212 × 1239	229 × 1250	S019	S019	Natural	4020-Y20R	29.8
0618	Carmel	457 × 914	389 × 729	399 × 730	S020	S020	Hammered	6005-Y50R	19.2
0850	Cedar Brown	230 × 1500	240 × 1461	229 × 1492	S024	S024	Natural	5020-Y20R	21.3
0849	Cedar Pure	230 × 1500	240 × 1461	229 × 1492	S025	S025	Natural	3010-Y30R	39.8
1276	Curton Stone Light Beige	457 × 914	389 × 729	399 × 730	S184	S184	Stone **	2010-Y40R	48.9
1275	Curton Stone Light Grey	457 × 914	389 × 729	399 × 730	S185	S185	Stone **	3005-Y20R	45.9
0441	Honey Oak	184 × 1219	212 × 1239	229 × 1250	S033	S033	Natural	4020-Y20R	27.7
0455	Long Board	184 × 1219	212 × 1239	229 × 1250	S034	S034	Brushed	4010-Y30R	24.8
0448	Malua Bay	184 × 1219	212 × 1239	229 × 1250	S035	S035	Brushed	2502-Y	47.1
0461	Michigan	184 × 1219	212 × 1239	229 × 1250	S038	S038	Brushed	6020-Y30R	13.5
0374	Parker Station	610 × 610	389 × 729	399 × 730	S047	S047	Hammered	8000-N	12.6
0503	Quartet	184 × 1219	212 × 1239	229 × 1250	S056	S056	Natural	5020-Y20R	19.4
0859	Quartet Fauve	184 × 1219	212 × 1239	229 × 1250	S057	S057	Natural	4030-Y20R	23.9
0870	Quartet Honey	184 × 1219	212 × 1239	229 × 1250	S058	S058	Natural	3040-Y20R	28.2
0456	Ranch	184 × 1219	212 × 1239	229 × 1250	S053	S053	Brushed	5005-Y50R	23.5
0436	Riverside	610 × 610	389 × 729	399 × 730	S032	S032	Hammered	6502-Y	16.7
0445	Rustic Oak	184 × 1219	212 × 1239	229 × 1250	S062	S062	Natural	4030-Y20R	20.4
1286	Salento Beige	184 × 1219	212 × 1239	229 × 1250	S186	S186	Natural	2010-Y40R	37.0
1287	Salento Light Grey	184 × 1219	212 × 1239	229 × 1250	S187	S187	Natural	2005-Y40R	46.6
0848	Swiss Oak Beige	184 × 1219	212 × 1239	229 × 1250	S011	S011	Natural	3010-Y30R	40.1
0796	Swiss Oak Golden	184 × 1219	212 × 1239	229 × 1250	S015	S015	Natural	4030-Y20R	25.8
0846	Swiss Oak Pearl	184 × 1219	212 × 1239	229 × 1250	S014	S014	Natural	3502-Y	36.1
0504	Twist	184 × 1219	212 × 1239	229 × 1250	S039	S039	Natural	3010-Y30R	38.9
0584	White Lime	184 × 1219	212 × 1239	229 × 1250	S074	S074	Saw Effect *	4005-Y20R	36.0

* Brushed emboss in Rigid Acoustic
 ** Hammered emboss in Rigid Acoustic

Packaging

Product size (mm)	m ² /box	m ² /pallet	Product size (mm)	m ² /box	m ² /pallet	Product size (mm)	m ² /box	m ² /pallet
Creation 40 Trend			Creation 40 Solid Clic			Creation 40 Rigid Acoustic		
457.2×914.4	4.60	230	212×1238.8	2.10	113.50	229×1250	2	96.4
609.6×609.6	4.83	202.86	239.6×1460.8	2.45	117.60	229×1492	2.39	114.8
184.15×1219.2	4.71	263.76	388.8×728.7	1.98	107.10	399×730	2.04	114.2
230×1500	4.49	255.93						

Exclusive embosses



Stone



Saw effect



Brushed



Hammered



Natural