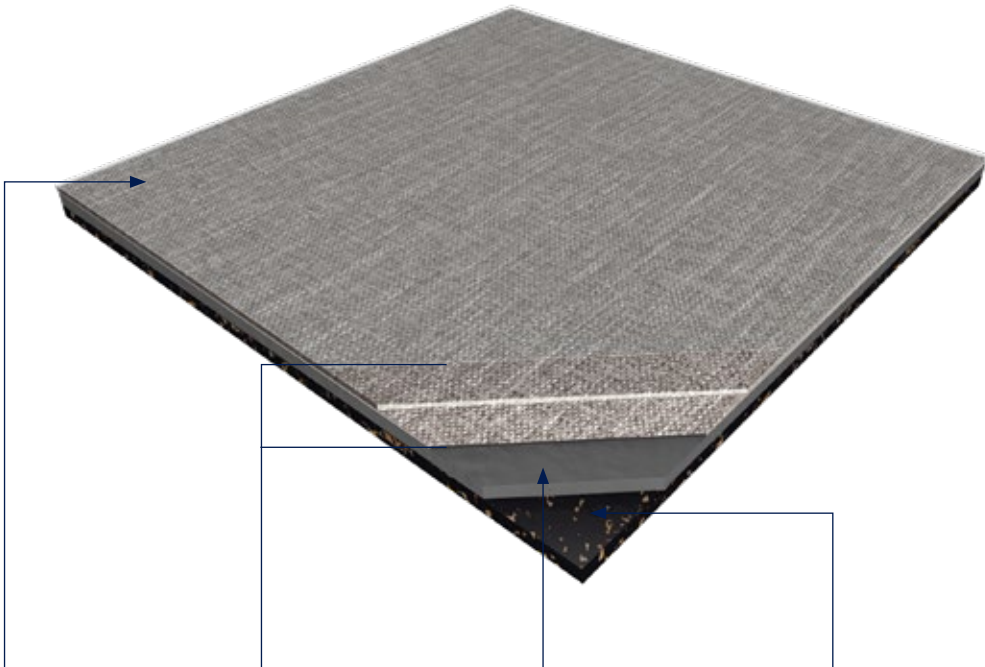


Creation Tiles & planks

Creation Saga² New



PROTECSOL®



Easy maintenance

4D DESIGN

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

STRUCTURED EMOSS



Ultra realistic surface

DESIGNS

Exclusive designs

RESILIENT CORE



Noise absorption



Acoustic



Soft underfoot



Renovation ceramic 5 mm joint

CORK BACKING



15 dB Impact Sound Insulation



Environmental friendly



Easily removable

Formats (mm)



Looselay Removable

Creation Saga²

Creation Saga² is a synthetic, decorative, flexible, antistatic, abrasion group T floorcovering available in tiles. It consists in a 0.70 mm thick transparent wear layer, a design film, a calendered layer and a PVC/Cork sublayer which provides acoustic properties with 15 dB impact sound insulation and a walking noise < 65 dB. The overall thickness is 4.6 mm. It benefits from a **ProtecSol®** surface treatment, making maintenance easier and eliminating the need for initial polishes.

Creation Saga² is a looselay floorcovering, resistant to use (commercial / industrial use) of 34-43 according to EN-ISO 10874 and has Bfl-s1 class for smoke emission according to EN 13501-1. **Creation Saga²** is made with phthalate free plasticizers, except recycled content. It is 100% recyclable and made with 55% of recycled content. It is REACH compliant. **The product emission rate of organic compounds is < 10 microgram/m³** (TVOC < 28 days – ISO 16000-6).



Comfort & Resistance



Acoustic



Renovation ceramic 5 mm joint



90° installation



Creation Saga²

Description

Total thickness	EN ISO 24346	mm	4.6
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	5595
Tile size	EN ISO 24342	mm	500 × 500
Number of tiles and sqm per box	-	-	10 / 2.50

Classification

Norm / Product specification	-	-	EN 652
European classification	EN ISO 10874	class	34-42
Fire rating	EN 13501-1	class	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet ⁽¹⁾	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10

Performances

Wear resistance	EN 660.2	mm³	≤ 2.0
Wear group	-	group	T
Dimensional stability (norm)	EN ISO 23999	%	≤ 0.15
Dimensional stability (average measured value)	-	%	≈ 0.05
Residual indentation	EN ISO 24343-1	mm	< 0.13
Castor chair test (type H)	ISO 4918	-	OK
Impact sound insulation	EN ISO 717-2	dB	15
Room impact	NF-S 31074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	ProtecShield™
Chemical products resistance	EN ISO 26987	-	OK

Environment / indoor air quality

TVOC after 28 days	ISO 16000-6	microgram/m³	< 10
--------------------	-------------	--------------	------

CE marking



EN 14041



(1) Ramp test with oil





Creation Tiles & planks

Creation Saga² **New**

Creation Saga²
500 × 500 mm



Oxyd Light Grey / Urban Street Medium

		
Urban Street Light 1283	Urban Street Medium 1284	Oxyd Light Grey 1610
		
Gentleman Taupe 0089	Tweed Green Chine 1585	Gentleman Jean Chine 1582
		
Oxyd Light Beige 1608	Tweed Chine Amande 1584	Tweed Light Grey 1586
		
Gentleman Grey 0088	Oxyd Light Green 1609	Gentleman Blue 0030

Scale : 1/5th

Design shade variation:  Light  Medium  high




Creation Tiles & planks

Creation Saga² **New**



Gentleman Abricot

Creation Saga²
500 × 500 mm

 	 	
Tamo Light 1559	Urban Street Cream 1565	
 	 	 
Gentleman Cream 1563	Tamo Clear 1567	Tweed Medium Beige 1587
 	 	 
Gentleman Terra 1564	Tamo Dainty 1560	Tweed Rose Ancien 1588
 	 	 
Gentleman Abricot 1581	Tamo Natural 1561	Urban Street Terra 1566

Scale : 1/5th

Design shade variation:  Light  Medium  high