

Wall Solutions


pages 240-255

242. Wall panels & tiles
242. Mural Revela New
248. Mural Revela accessories New

250. Wall coverings
252. Mural Ultra Design
254. Mural Club
Mural Calypso New
(See page 296)

Mural Revela New

Mural Revela

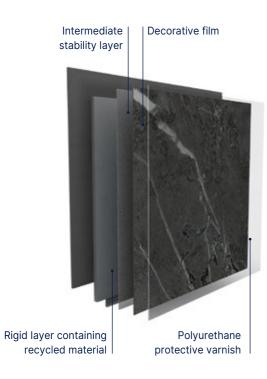

MURAL REVELA is a rigid vinyl wall covering which has a thickness of 5mm for an extended durability. It is available in 2 formats of $65 \times 37,5$ cm for tiles or 260×90 cm / 260×120 cm for panels. It is intended for indoor use.

Its non-porous conception, its tongue and groove assembly system combined with a glued installation give **MURAL REVELA** a water resistance allowing an installation in wet areas including showers. Thanks to its robust conception and the total thickness of the product, **MURAL REVELA** is an ideal solution for renovation on ceramic tiles.

It has a fire reaction classification D-s3,d0 according to EN13501. It has excellent chemical resistance according to EN 423. It will be CMR 1 & 2 free and 100% Reach compliant. TVOC 28-day air emissions (NF EN 16000-6) will be classified as A+ (best class) under French health labelling.

MURAL REVELA has been designed and is produced in Europe.

MURAL REVELA contains up to 30% recycled and is 100% recyclable.

It can be collected and recycled through the Gerflor Second Life programme (selected countries).













- Tile and XL/XXL panel sizes
- Groove/tongue assembly
- Suitable for new builds
- Refurbishment over existing ceramic tiles
- Easy and quick to install
- Water resistant
- Washable product
- Installation in shower and/or bathtub area

		_					
			Mural Revela				
		_	Tile	XL Panel	XXL Panel		
Description							
Total thickness	EN ISO 24346	mm		5			
Weight	EN ISO 23997	g/sqm	Matt: 6750 / Gloss: 7500				
Size	NF EN ISO 24341	cm	65 × 37,5	90 × 260	120 × 260		
Chanfrein	=	-	Oui	Non	Non		
Classification							
Product specification	-	-		EN 15 102			
Fire rating	EN 13501-1	class		D-s3,d0			
Performances							
Surface Treatment	-	-		OK			
Cleanability	EN 233	-	Washable and brushable				
Environment/Indoor Air (Quality						
TVOC after 28 days	ISO 16516	μg/ m³		<100			
Recyclability	-	-	100%				
Recycled content	-	-	Up to 30%				
CE marking							




Mural Revela New











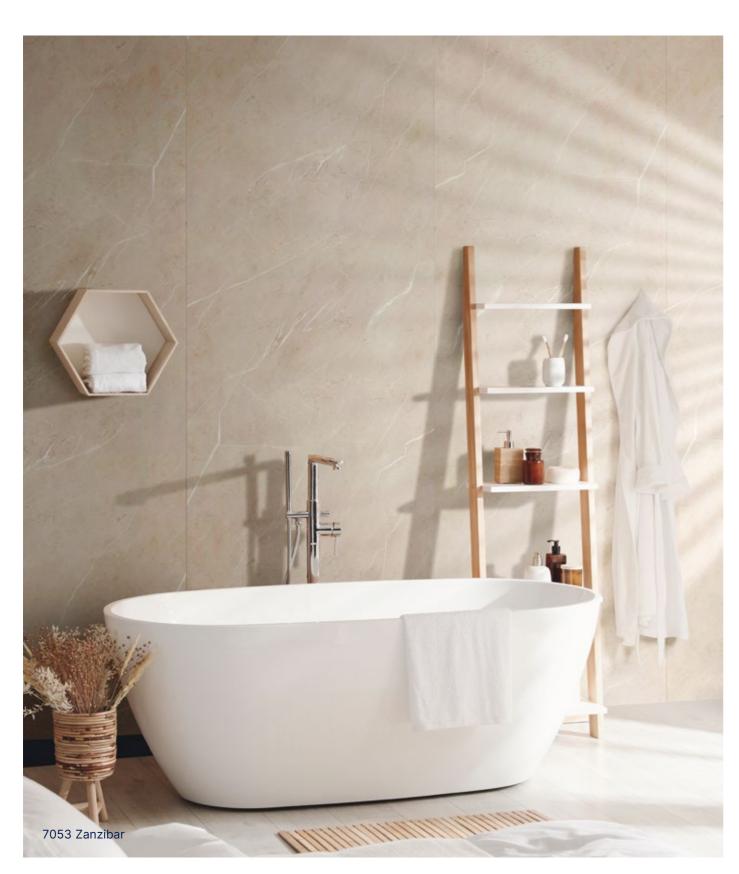

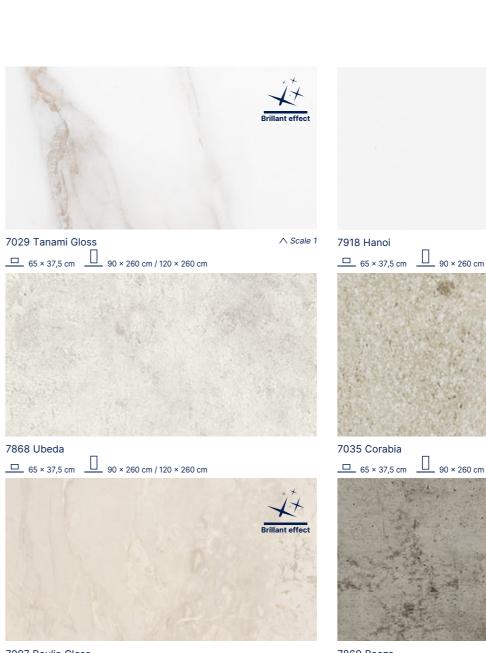





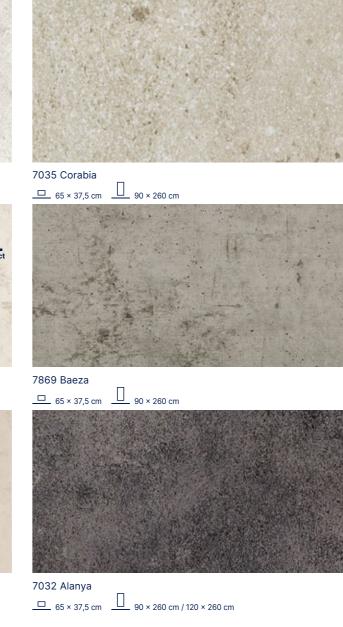

Mural Revela New














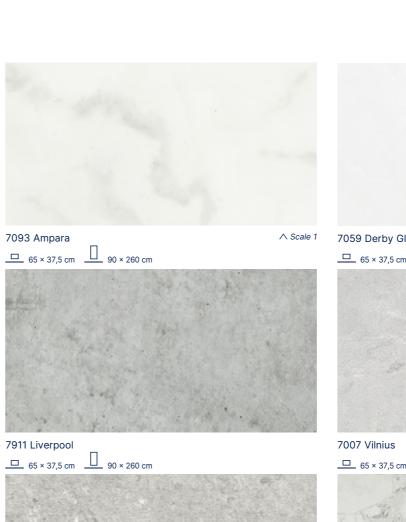

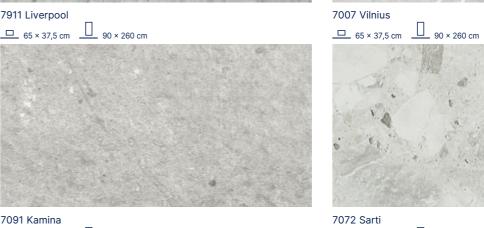





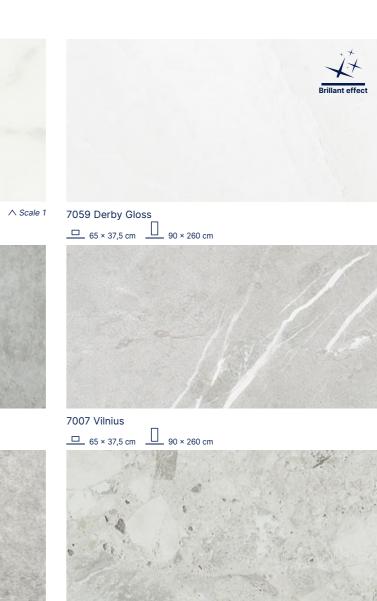



□ 65 × 37,5 cm □ 90 × 260 cm

Mural Revela accessories New







A complete solution with aluminum profiles for a perfect finish














Start trim Code: 0652 + color code



Aluminium - 0001



Aluminium - 0001



Black - 0002



Aluminium - 0001



Black - 0002



Aluminium - 0001



Aluminium - 0001



Aluminium - 0001

Wall coverings

Mural Ultra Design / Mural Club / Mural Calypso

Mural Ultra Design




MURAL ULTRA DESIGN is a 2m width flexible wall covering vinyl sheet which has a thickness of 1.5mm for an extended durability. Fully resistant to impact (EN 259), MURAL ULTRA DESIGN acts as a buffer against damage from beds, trolleys, indoor motorized vehicles and other transportation systems. It is therefore ideal for use as a cladding in large public buildings such as hospitals, care institutions, dental and veterinary surgeries, schools, clean rooms, stores and supermarkets, warehouse and storage areas.

It is made of a 0.10mm printed design layer and a 1.4mm coloured resistance layer which will ensure a perfect welding aspect. It has a B-s2,d0 fire classification (EN 13501-1) which complies with most European fire regulations.

According to ISO 22196, MURAL ULTRA DESIGN has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h00. It is made of a coloured backing which comprises up to 30% recycled products. It is 100 % recyclable, and the components are 100% compliant with Reach

MURAL ULTRA DESIGN benefits from the Protecsol® surface treatment which ensures easy maintenance (EN 233) and avoids staining of chemical products (EN ISO 26987) used in healthcare like iodine alcohol, Betadine, eosin and antibacterial hand gel. It is also resistant to decontamination (class 3 according to ISO 14644-1). The joints are hot-welded to ensure perfect water-tightness. MURAL ULTRA DESIGN can be welded with 2mm flooring to ensure a perfect hygiene by avoiding gaps.

Mural Club



MURAL CLUB is a homogeneous wall covering in 2 m width roll and with a B-s2,d0 fire classification. It is designed to be a permanent wall covering. It is hot welded with CR40 welding rods for better hygiene. It is made of calendered layer with colour throughout the whole thickness for an nicer aspect of the welding. This layer comprises at least 10% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable.

MURAL CLUB benefits from a PUR surface treatment which provides good resistance to chemical products and makes maintenance easier.

According to ISO 22196, MURAL CLUB has anti-bacterial activity against E. coli, S. aureus and MRSA of 99% after 24h. Full resistant to impact, it acts as a buffer against damage from beds, trolleys and indoor motorized vehicles and other transportation systems. MURAL CLUB is fully impact resistant and is therefore ideal for use as a cladding in large public buildings such as hospitals care institutions dental and veterinary surgeries, clean rooms, stores and supermarkets, warehouse and storage areas.

Mural Calvoso New See page 296

- Easily seam welded to produce continuous surfaces.
- Create a safe and hygienic environment.
- Flexible and easy to cove.
- Ideal for walls and ceilings.
- Recyclable and Eco responsible.

			Mural Ultra Design	Mural Club	Mural Calypso
Description					
Total thickness	EN ISO 24346	mm	1.5	1.00	0.92
Thickness of transparent decorative layer	-	mm	0.10	-	0.10
Thickness of resistance layer	-	mm	1.4	1.00	-
Weight	EN ISO 23997	g/sqm	2450	1780	1610
Width/Length of sheet	EN ISO 24341	cm/ml	200 / 21	200 / 30	200 / 30
Classification					
Product specification	-	-	EN 259-1	EN 259-1	EN 259-1
Fire rating	EN 13501-1	class	B-s2,d0	B-s2,d0	B-s2,d0
Performances					
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	PUR	-
Chemical products resistance (1)	EN ISO 26987	-	OK	OK	OK
Cleanability	EN 233		Washable and brushable	Washable and brushable	Washable and brushable
Emission of particles	ISO 14644-1	class	Class 3	-	-
Anti-bacterial activity (E. coli - S. aureus - MRSA) (2)	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth	> 99% inhibits growt
Resistance to impacts	EN 259-2	-	No visible bursting or cracking	-	-
Scratch resistance	NF EN 14565 annex A	-	No visible deterioration	-	-
Determination of flexibility	EN ISO 24344	-	No damage, no cracking	-	-
Resistance of welded joints	EN 684	N/50mm	≥ 250	-	-
Environment / air quality					
TVOC after 28 days	ISO 16516	μg/ m³	<10	-	<100
Recyclability	-	-	100%	100%	100%
Recycled content	-	-	Up to 30%	Up to 30%	Up to 30%
CE marking				<u> </u>	

7

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.

(2) The implementation of an effective cleaning regime is the most important defence against infection.

Wall coverings

Mural Ultra Design





IN STOCK



8408 Skyline



∧ Scale 1

8408 Skyline

8309 Lotus

8011 Lichen





8002 Bamboo Lotus



8000 Bamboo Snow Pearl



8611 Snow



8740 Fabric Silk



8721 Manhattan Mist



8010 Haze <u>©</u>



8005 Blossom Snow Pearl

ON DEMANDMinimum order quantity 500sqm



7025 Arty Beige

7019 Cloud Terra

7013 Ginko Snow Gold*

7020 Uni Ice



7201 Cloud Moonlight <u>©</u>

7026 Arty Grey



7311 Cloud Linen



7017 Cloud Pink



7022 Envol Snow Green*




7023 Envol Snow Skyline*






7015 Tropic Skyline



7016 Tropic Terra Copper <u>©</u>



7021 Uni Lotus <u>©</u>



7027 Verona <u>©</u>




Wall coverings

Mural Club



Ompact PUR 100% recyclable

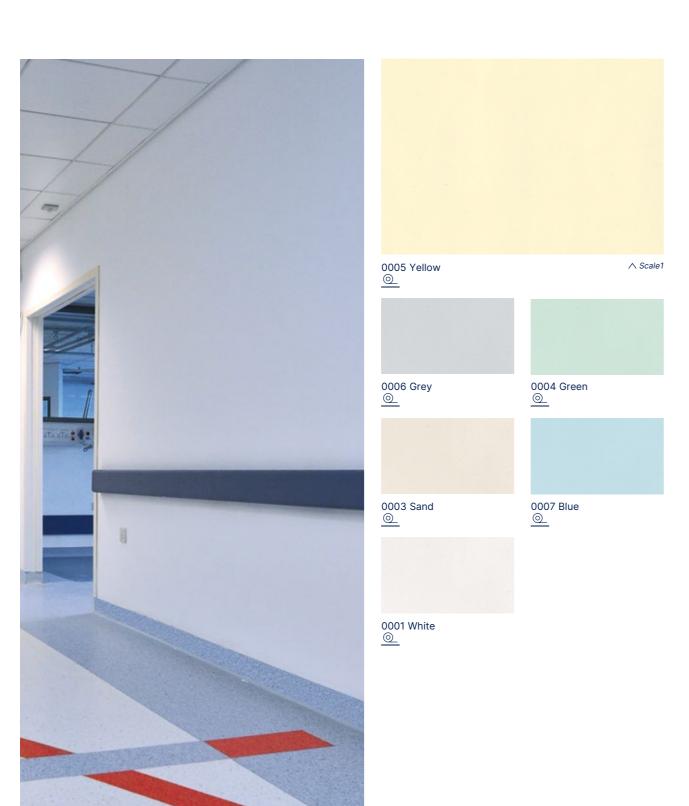

Mural Calypso New (See page 296)





