



Creative by Nature

# DLW Linoleum

pages 298-327

## 308. Compact Linoleum

- 310. Marmorette
- 314. Colorette
- 315. Uni Walton
- 316. Lino Art

## 320. Acoustic Linoleum

- 322. Marmorette Acoustic
- 322. Marmorette Acoustic Plus
- 323. Colorette Acoustic Plus
- 323. Uni Walton Acoustic Plus
- 323. Lino Art Urban Acoustic Plus

## 324. Technic Linoleum

- 325. Linodur -  
High Mechanical Traffic Resistance
- 325. Marmorette LCH -  
Dissipative Linoleum for ESD areas

### KEY POINTS TO REMEMBER ABOUT GERFLOR DLW LINOLEUM

- 1** The DLW brand stands for **150 years of experience** and has been considered a **reference since its creation**.
- 2** The greenest solution on the market:  
**98% bio based material / 76% rapidly renewable / up to 40% recycled content.**
- 3** **Unlimited possibilities** in terms of **creativity**, allowing unique and **differentiating designs**.
- 4** Adapted to numerous types of buildings, from **education** to **healthcare**, from **public buildings** to **offices**, thanks to a complete portfolio of **compact, acoustic, sport** and **industrial solutions**.



98%

natural

76%


Rapidly renewable

Up to 40%

Recycled content


41%

Linseed oil




20%

Wood flour




19%

Limestone




8%

Jute




5%

Resin




3%

Coloured pigments



2%

Cork




To fight climate emergency and natural resources depletion, every choice counts. DLW Linoleum is a 98% natural, low carbon and circular flooring solution.

we care / we act

Cradle to Cradle  
Certified™ SILVER<sup>(1)</sup>

Developed using circular economy principles

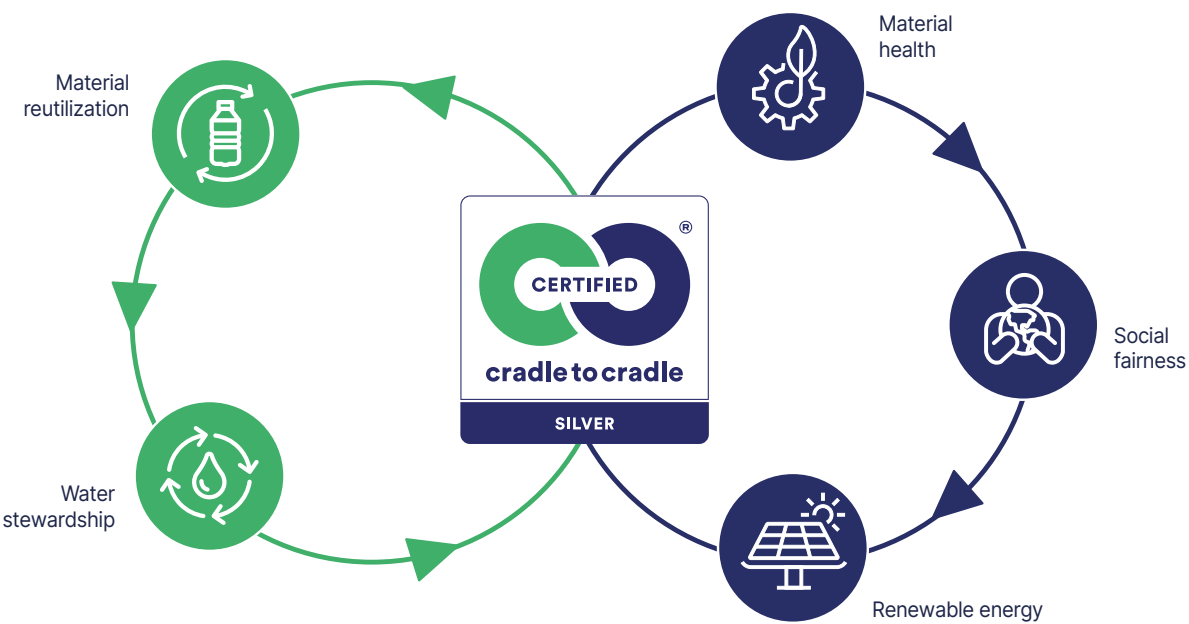

Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.

Carbon neutral<sup>(2)</sup>



Third party certified EPD indicates carbon neutrality during the first stages of its life cycle.

100 % recyclable



All Gerflor floorings are 100% recyclable and eligible to **Gerflor Second Life collection and recycling program**. Free collection of installation waste is available in 10 countries.

(1) Marmorette, Colorette, Uni Walton, Linodur, Marmorette Acoustic 15dB, Lino Art. / Cradle Certified™ is a registered trademark of the Cradle to Cradle Products Innovation Institute.  
(2) Cradle to Gate: From Cradle to Gate: includes raw materials and manufacturing process (A1-A3 stages of EPD). Source: Environmental Product Declaration (EPD). Certified by Evea. More information on gerflor.com





# DLW Linoleum

## Protective by Nature



**New solvent-free surface protection,  
developed exclusively for linoleum**  
Extremely hard-wearing due to triple laser uv  
cross-linking technology



### Indoor Air Quality

- Very low VOC emissions  
TVOC < 10 microgram/m<sup>3</sup> after 28 days  
(ISO 16516)
- Certified according to the most  
demanding standards



### Natural Design

#### Matt Effect



### Easy To Clean

- Dirt and stain barrier
- Cost effective maintenance
- Easy cleaning with a mop or any modern cleaning equipment

Detailed cleaning protocol available on [www.gerfor.com](http://www.gerfor.com)



Standard Linoleum



Neocare™



### Hygiene

- DLW Linoleum floorings contribute to lower the microbe load  
(bacteria, virus, ...) and to minimise the risk of a contamination chain.
- Excellent resistance against disinfection chemicals
  - Anti-viral and anti-bacterial activity



### Durable

- No sealing and waxing needed
- Higher scratch resistance
- Easy to repair: in case of heavily damaged flooring, DLW linoleum  
can be easily repaired using the spray buffing method (red disk)



Standard Linoleum

NEOCARE™



#### WAXING

Neocare™ is a high performing surface treatment protecting against  
dirt, stains and scratches and does not require any sealing & waxing  
throughout the life of the product. Waxing remains an option.




Black disk





# DLW Linoleum

Mix & Match

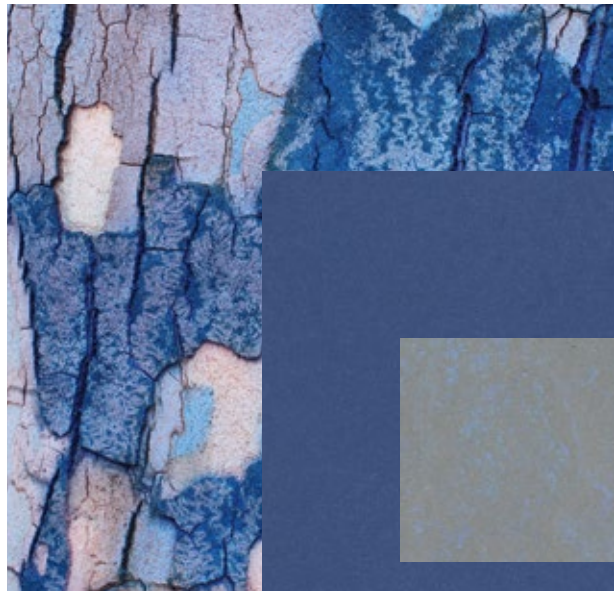

Lino Art Urban  
0566 Shining Blue

Uni Walton  
0100 Ocean Blue








Lino Art Urban  
0555 Flashy Street Grey




Marmorette  
0117 Mandarin Orange



Visualize your project  
[interiordesigner.gerflor.com](https://interiordesigner.gerflor.com)

			Marmorette	Colorette / Uni Walton	Lino Art Urban / Metallic / Star	Marmorette Acoustic	Marmorette Acoustic Plus Colorette Acoustic Plus Uni Walton Acoustic Plus Lino Art Urban Acoustic Plus	Linodur	Marmorette LCH
Description			R10	Bfl-s1					
Total thickness	EN ISO 24346	mm	2.0 / 2.5 / 3.2	2.5	2.5	2.5	4.0	4.0	2.5
Backing	-	-	Jute fabric		Jute fabric	Jute fabric	Cork and jute fabric backing	Foam backing	Jute fabric
Thickness of cork/foam backing	EN ISO 24340	-	-		-	-	2	1.5	-
Weight	EN ISO 23997	g/sqm	2400 / 2900 / 3800	2900	2900	2900	3900	3500	3000
Width of sheet	EN ISO 24341	cm	200		200	200	200	200*	200
Length of sheet	EN ISO 24341	m	20-31		20-31	20-31	20-31	20-31*	20 - 31
Classification									
Norm/Product specification	-	-	EN ISO 24011		EN ISO 24011	EN ISO 24011	EN 687	EN 686	EN ISO 24011
European classification	EN ISO 10874	class	23 / 34 / 43		23 / 34 / 43	23 / 34 / 43	23 / 33 / 41	23 / 33 / 41	23 / 34 / 43
			23 / 32 / 41 in 2.0 mm						
Classement UPEC	-	-	-/U4P3E1/2C2		U4P3E1/2C2	-	-	-	-
Fire rating**	EN 13501-1	class	Cfl-s1		Cfl-s1	Cfl-s1	Cfl-s1	Cfl-s1	Cfl-s1
Slip resistance	EN 16165:2021 – Appendix B (DIN 51 130)	class	R9	R10	R9	R9	R9	R9	R9
Impact sound insulation	EN ISO 717-2	dB	3 dB / 5 dB / 6 dB	5 dB	5 dB	5 dB	15 dB	19 dB	3 dB
Performances									
Residual indentation	EN ISO 24343-1	mm	≤ 0.09 / ≤ 0.11	≤ 0.11	≤ 0.11	≤ 0.11	≤ 0.40	≤ 0.30	≤ 0.15
Colour fastness	EN ISO 105-B02	rating	≥ 6		≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Vertical resistance	EN 1081	Ohm	-		-	-	-	-	10 <sup>6</sup> ≤ R ≤10 <sup>8</sup>
Point contact resistance	VDE 0100	kOhm	> 200		> 200	> 200	> 200	>200	>100
Static electrical propensity	EN 1815	kV	≤ 2		≤ 2	≤ 2	≤ 2	≤ 2	≤ 2
Castor chair test (Type W)	ISO 4918	-	OK		OK	OK	OK	OK	OK
Flexibility	ISO 24344	mm	Ø 40 (2.5 mm)		Ø 40	Ø 40	Ø 60	Ø 40	Ø 40
Flexibility / average measured value	ISO 24344	mm	Ø 30 (2.5 mm)		Ø 30	Ø 30	Ø 30	Ø 35	Ø 30
Thermal resistance	EN 12667	(m²/K)/W	0.012 / 0.015 / 0.018	0.015	0.015	0.015	0.04	0.044	0.015
Thermal conductivity	EN ISO 10456	W/(m.K)	0.17		0.17	0.17	0.17	0.0937	0.17
Surface treatment	-	-	Neocare™		Neocare™	Neocare™	Neocare™	Neocare™	Neocare™
Chemical products resistance	EN ISO 26987	-	Excellent		Excellent	Excellent	Excellent	Excellent	Excellent
Anti-bacterial activity (E. coli – S. aureus – MRSA) after 24 h***	EN ISO 22196 / JIS Z 2801	-	> 99.99 % inhibits growth		> 99.99 % inhibits growth	> 99.99 % inhibits growth	> 99.99 % inhibits growth	> 99.99 % inhibits growth	> 99.99 % inhibits growth
Anti-viral activity (Human coronavirus) after 5 h***	ISO 21702	-	> 98.65 % virucidal activity		> 98.65 % virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity	> 98.65 % virucidal activity
Indoor air quality									
TVOC after 28 days	EN 16516	microgram/m³	< 10		< 10	< 10	< 10	< 10	< 10
Circular economy									
Certification	Cradle to Cradle	-	Silver		Silver	Silver	Silver	Bronze	-
CE marking									
			EN 14041 : 2004 AC : 2006						
-			   						


\* Roll dimension for SRP article code: R929/R930/R931/R932/R933/R934/R935: 1,96m x 18-29lm  
\*\* Glued according to certificate. DOP numbers available from your local branch.  
\*\*\* The implementation of an effective cleaning method is the best defence against infection.

 Depending on light exposure, the product color can vary, due to linoleum natural oxidization process. This process is reversible.  
We recommend that the samples be exposed to sunlight for several hours prior to making a final color choice.



# Compact Linoleum

Marmorette / Colorette /  
Uni Walton / Lino Art

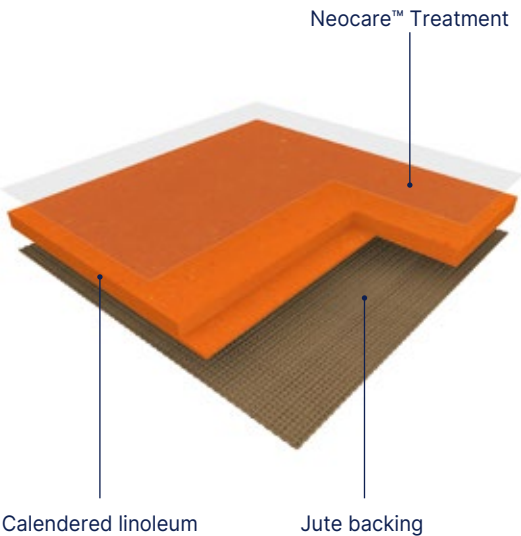

Marmorette / Colorette /  
Uni Walton / Lino Art

**MARMORETTE** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2400g/sqm in 2.0mm, 2900g/sqm in 2.5mm and 3800g/sqm in 3.2mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

**COLORETTE** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a speckled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

**UNI WALTON** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a uni design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

**LINO ART** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 2900g/sqm in 2.5mm. It features a striated design, a scattered metallic design (METALLIC), a scattered colour chips design (STAR), a concrete design (URBAN) and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable.

**COLORETTE, MARMORETTE, UNI WALTON, LINO ART**  
The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes.











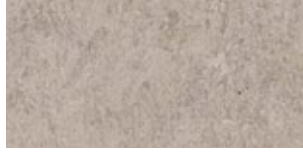







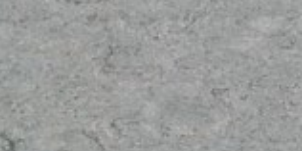





The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m³) and are classified A + (the best class) in the context of health labeling. It is Floorscore®, M1 and Blue Angel certified.  
The floorings are 100% recyclable, are composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance. Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Silver. They are Environmental Performance Declaration (EPD) certified by an external laboratory indicating carbon neutrality during the first stages of their life cycle ("from cradle to gate").  
The Camouflage (Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible. They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.

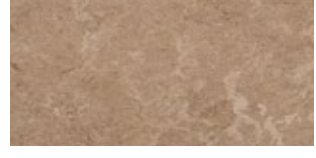

# Compact Linoleum

## Marmorette

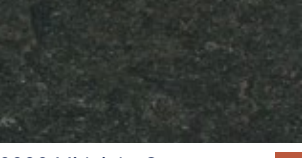

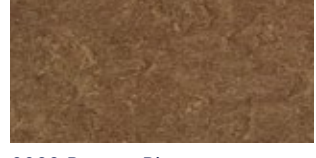			
0056 Foggy Blue 2.5 mm / 3.2 mm	0253 Pebble Grey 2.5 mm	0252 Light Grey 2.5 mm	0251 Cream 2.5 mm
			
0053 Ice Grey 2.0 mm / 2.5 mm / 3.2 mm	0254 Mineral Grey 2.5 mm	0155 Smoked Pearl 2.5 mm	0106 Hazelnut Shake 2.5 mm
			
0055 Ash Grey 2.0 mm / 2.5 mm / 3.2 mm	0166 Clay 2.5 mm	0091 Shiitake Mushroom 2.5 mm	0146 Beeswax Beige 2.5 mm
			
0054 Concrete Patty 2.5 mm	0158 Tabac Grey 2.5 mm	0153 Greystone Grey 2.5 mm	0090 Soapstone 2.5 mm
			
0160 Industrial Grey 2.0 mm / 2.5 mm	0050 Quartz Grey 2.0 mm / 2.5 mm / 3.2 mm	0164 Milk Coffee 2.5 mm	0003 Dark Brown 2.5 mm
			
0096 Midnight Grey 2.5 mm	0059 Plumb Grey 2.0 mm / 2.5 mm / 3.2 mm	0108 Mokka Brown 2.5 mm	0089 Peacan Pie 2.5 mm

## Marmorette



			
0070 Rocky Brown 2.0 mm / 2.5 mm / 3.2 mm	0092 Beach 2.5 mm	0040 Light Sahara 2.0 mm / 2.5 mm	
			
0072 Golden Yellow 2.5 mm	0172 Papaya Orange 2.5 mm	0076 Pale Yellow 2.5 mm	0098 Desert Beige 2.5 mm
			
0073 Spicy Orange 2.5 mm	0173 Melon Orange 2.5 mm	0243 Marble Beige 2.5 mm	0045 Sand Beige 2.0 mm / 2.5 mm
			
0117 Mandarin Orange 2.5 mm	0118 Chili Red 2.5 mm	0018 Lobster Red 2.5 mm	0145 Banana White 2.5 mm
			
0119 Terracotta 2.5 mm	0019 Sunset Orange 2.5 mm	0075 Light Aurora 2.5 mm	0211 Pink 2.5 mm

 Acoustic 15 dB in stock     AcousticPlus 19 dB in stock     R10: in stock     Bfl-s1: in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.  
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.



# Compact Linoleum

## Marmorette

 Compact

Neocare™

 2.0mm

 2.5mm

 3.2mm

		
0130 Antique Green 2.5 mm	 0049 Royal Blue 2.5 mm / 3.2 mm	0121 Blue Eyes 2.5 mm
		
0100 Frog Green 2.5 mm	0043 Leaf Green 2.5 mm	0148 Ink Blue 2.5 mm
		
0132 Lime Green 2.5 mm	0099 Grey Turquoise 2.5 mm	0128 Violet 2.5 mm
		
0138 Khaki 2.5 mm	 0022 Autumn Blue 2.5 mm / 3.2 mm	0224 Mystery Blue 2.5 mm
		
0083 Jungle 2.5 mm	0136 Turquoise Bay 2.5 mm	0149 Dark Blue 2.5 mm
		
0129 Curacao Petrol 2.5 mm		

^ Scale 1

 Acoustic 15 dB in stock

 AcousticPlus 19 dB in stock

 R10: in stock

 Bfl-s1: in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.  
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

0129 Curacao Petrol



# Compact Linoleum

## Colorette



0001 Banana Yellow

0001 Banana Yellow  
2.5 mm

A+

^ Scale 1

0052 Oxyd Grey  
2.5 mm

A+

0071 Straw Beige  
2.5 mm

0073 Sand Yellow  
2.5 mm

0132 Spicy Green  
2.5 mm

A+

0059 Stone Grey  
2.5 mm

A+

0058 Aluminium Grey  
2.5 mm

0171 Sunrise Orange  
2.5 mm

0006 Vivid Green  
2.5 mm

0080 Elephant Grey  
2.5 mm

A+

0012 Light Beige  
2.5 mm

A+

0016 Deep Orange  
2.5 mm

0123 Poppy Blue  
2.5 mm

0081 Private Black  
2.5 mm

0043 Light Mud  
2.5 mm

0170 Kumquat Orange  
2.5 mm

0004 Bluebird  
2.5 mm

0118 Power Red  
2.5 mm

0110 Cadillac Pink  
2.5 mm

A+

 AcousticPlus 19 dB in stock

All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.

All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

# Uni Walton



0100 Ocean Blue

0100 Ocean Blue  
2.5 mm

^ Scale 1

0062 Mediterranean Orange  
2.5 mm

0043 Neutral Beige  
2.5 mm

0059 Frost Grey  
2.5 mm

0095 Spring Blue  
2.5 mm

A+

0010 Pompeji Red  
2.5 mm

A+

0085 Warm Concrete Grey  
2.5 mm

A+

0081 Nickel Grey  
2.5 mm

0083 Architects Grey  
2.5 mm

A+

0088 Chestnut  
2.5 mm

0090 Olive  
2.5 mm

A+

0082 Broken Grey  
2.5 mm

0080 Black  
2.5 mm

0060 Deep Brown  
2.5 mm

0058 Clay Grey  
2.5 mm

A+

0035 Racing Green  
2.5 mm

A+

 AcousticPlus 19 dB in stock


All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.

All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.




# Compact Linoleum

## Lino Art - Urban

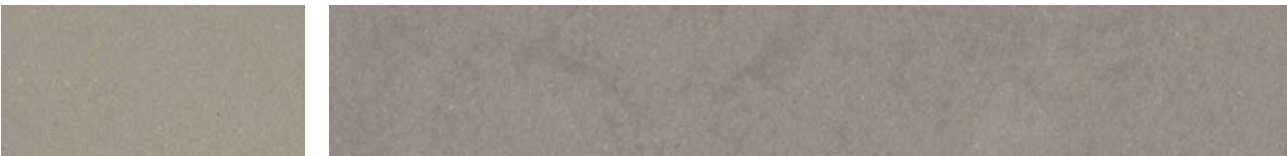

0551 Flashy Asphalt Grey 2.5 mm      0554 Concrete Grey 2.5 mm **A+** ^ Scale 1

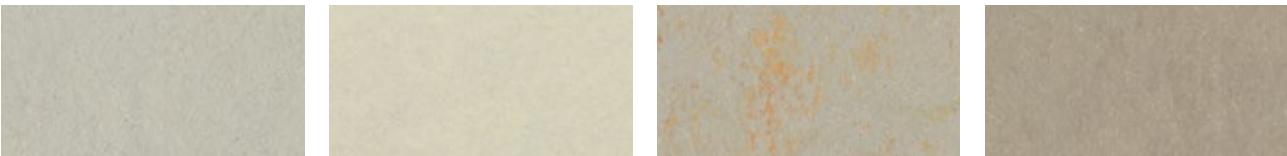


0552 Silver Grey 2.5 mm      0564 Natural Stone 2.5 mm **A+**      0555 Flashy Street Grey 2.5 mm      0550 Beton Soft Grey 2.5 mm



0567 Shining Green 2.5 mm      0556 Mud Grey 2.5 mm **A+**      0557 Urban Grey 2.5 mm      0558 Screed Grey 2.5 mm **A+**




0566 Shining Blue 2.5 mm      0562 Titan Grey 2.5 mm      0560 Bold Grey 2.5 mm      0559 Vintage Grey 2.5 mm

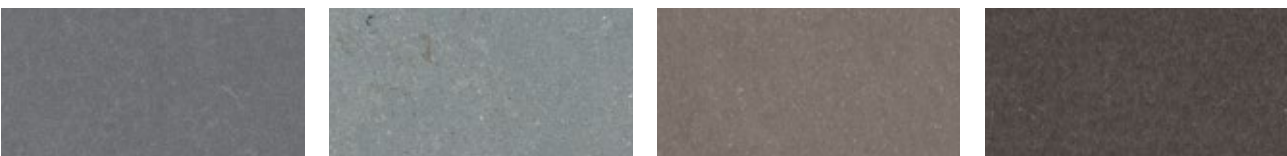

0565 Graphite Grey 2.5 mm      0563 Zinc Grey 2.5 mm      0553 Dark Concrete Grey 2.5 mm **A+**      0561 Pitch Black 2.5 mm **A+**

**A+** AcousticPlus 19 dB in stock  
All colours can be manufactured in Acoustic 15 dB version. Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.  
All colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

## Lino Art - Star

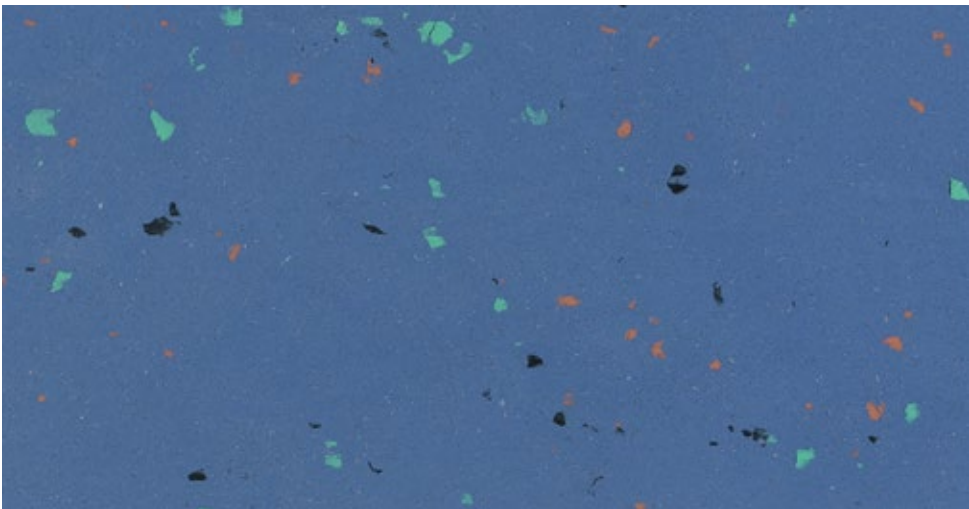


0025 Clear Blue 2.5 mm ^ Scale 1




0020 Aqua Turquoise 2.5 mm      0001 Lemon Yellow 2.5 mm      0092 Stratiatella 2.5 mm



0030 Apple Green 2.5 mm      0075 Apricot 2.5 mm      0059 Dusty Grey 2.5 mm

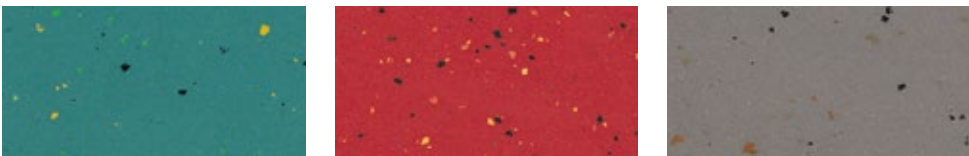

0023 Blue Turquoise 2.5 mm      0015 Glaring Red 2.5 mm      0090 Smooth Grey 2.5 mm

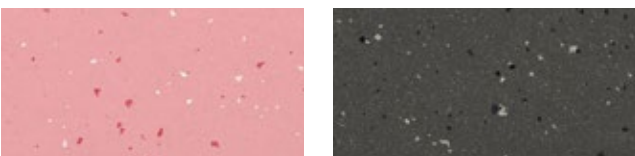


0094 Bubble Gum 2.5 mm      0085 Mid Grey 2.5 mm



# Compact Linoleum

## Lino Art - Metallic

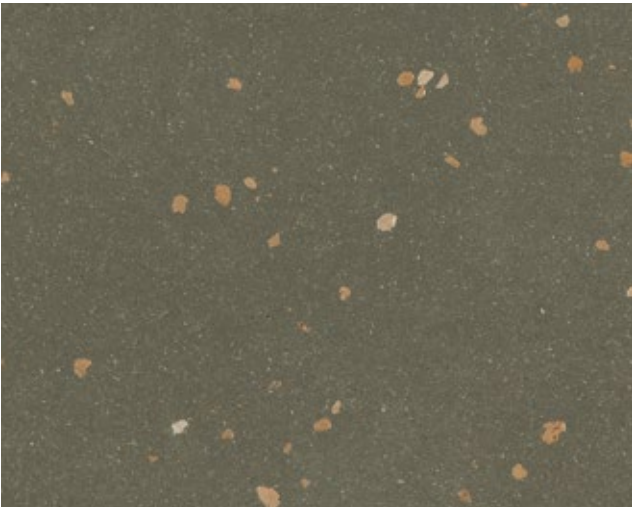

0072 Olive Green  
2.5mm ^ Scale 1



0078 Petrol Blue  
2.5 mm



0070 Cool Grey  
2.5 mm



0083 Aluminio Light Grey  
2.5 mm




0068 Bottle Green  
2.5 mm



0074 Burned Siena  
2.5 mm



0080 Firmament Black  
2.5 mm

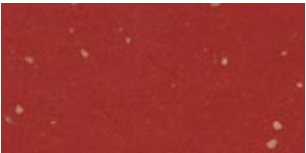

0076 Salsa  
2.5 mm



0072 Olive Green




Colorette - 0001 Banana Yellow




# Acoustic Linoleum

## Marmorette Acoustic Plus / Colorette Acoustic Plus

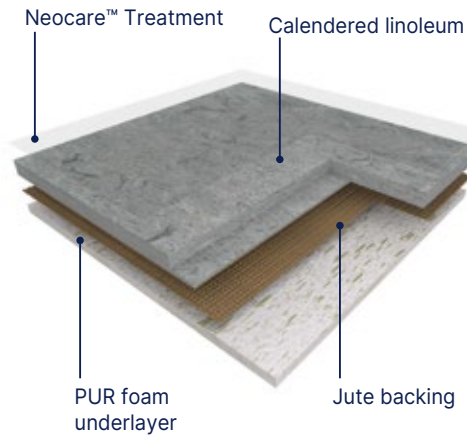

## Marmorette Acoustic

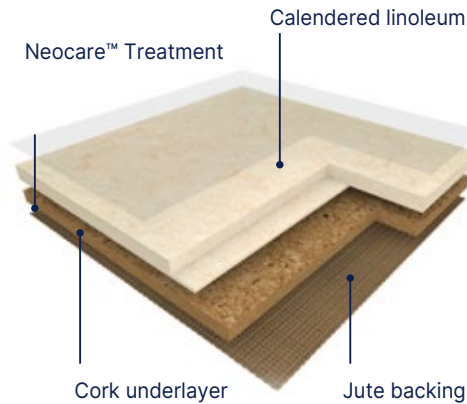

## Korkment: Cork Acoustic Underlayer



2.0 mm underlayer (weight 1.2 kg/sqm)  
15 dB impact sound reduction

Ref R1020102



## Marmorette Acoustic Plus / Colorette Acoustic Plus Uni Walton Acoustic Plus / Lino Art Urban Acoustic Plus

**MARMORETTE ACOUSTIC PLUS** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1.5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

**COLORETTE ACOUSTIC PLUS** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a speckled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

**UNI WALTON ACOUSTIC PLUS** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a uni design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

**LINO ART URBAN ACOUSTIC PLUS** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3500g/sqm in 4.0mm. It features a concrete design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, minerals and jute fabric), rapidly renewable and features a 1,5mm recycled foam underlayer, ensuring up to 19dB impact sound reduction.

## Marmorette Acoustic

**MARMORETTE ACOUSTIC** is a calendered linoleum acoustic floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its weight is 3900g/sqm in 4.0mm. It features a marbled design and presents a matt finish, is composed of natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric), rapidly renewable and features a 2mm cork underlayer, ensuring up to 15dB impact sound reduction.

## Acoustic Linoleum

The floorings are produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The products ensure perfect indoor air quality (TVOC at 28 days (EN 16516) < 10 microgram/m<sup>3</sup>) and are classified A + (the best class) in the context of health labeling. They are Floorscore®, M1 and Blue Angel certified. The floorings are 100% recyclable, are composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, are REACH compliant and rated Cfl-s1 for fire resistance. Designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications, the floorings are Cradle to Cradle certified™ Bronze (Marmorette AcousticPlus, Colorette AcousticPlus) and Cradle to Cradle certified™ Silver (Marmorette Acoustic). Their Environmental Performance Declaration (EPD) certified by an external laboratory, indicate carbon neutrality during the first stages of their life cycle ("from cradle to gate"). The Camouflage (Marmorette) or Uni (Colorette, Uni Walton, Lino Art) welding rod makes the connections between the strips invisible. They are antistatic, antibacterial according to ISO 22196 / JIS Z 2801 and antiviral according to ISO 21702.



# Acoustic Linoleum

## Marmorette Acoustic




15 dB

Neocare™


4 mm




0019 Sunset Orange  
4.0 mm

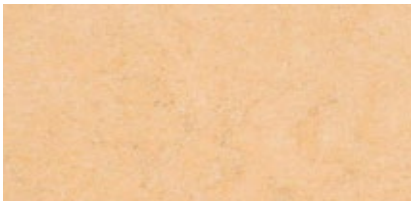


0098 Desert Beige  
4.0 mm

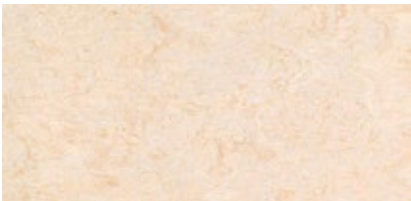

0045 Sand Beige  
4.0 mm

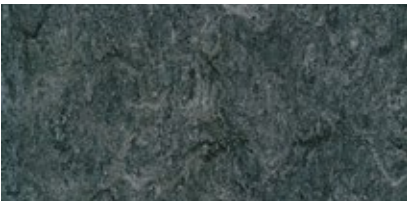

0059 Plumb Grey  
4.0 mm

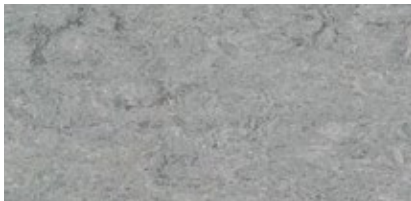

0053 Ice Grey  
4.0 mm



0023 Dusty Blue  
4.0 mm

All other colours can be manufactured in Acoustic 15 dB version.  
Special request - Minimum order quantity: 1500 sqm. Below 1500 sqm, use Korkment underlayer.


## Marmorette Acoustic Plus




19 dB

Neocare™

4 mm

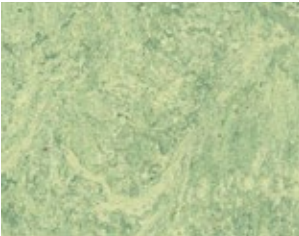

0130 Antique Green  
4.0 mm

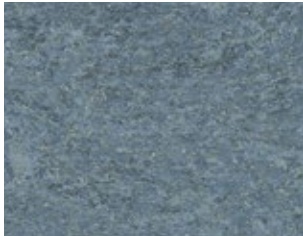

0022 Autumn Blue  
4.0 mm




0023 Dusty Blue  
4.0 mm




0153 Greystone Grey  
4.0 mm




0073 Spicy Orange  
4.0 mm

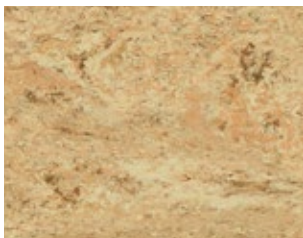


0070 Rocky Brown  
4.0 mm

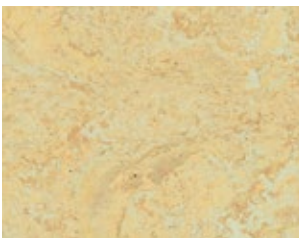


0040 Light Sahara  
4.0 mm

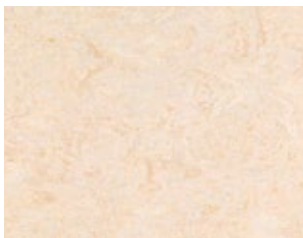

0045 Sand Beige  
4.0 mm

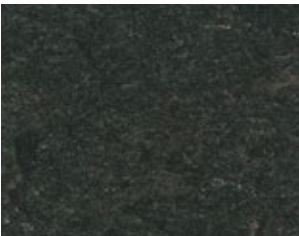

0096 Midnight Grey  
4.0 mm

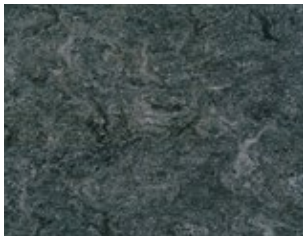

0059 Plumb Grey  
4.0 mm



0053 Ice Grey  
4.0 mm



0158 Tabac Grey  
4.0 mm

All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.

## Colorette Acoustic Plus



19 dB

Neocare™

4 mm



0012 Light Beige  
4.0 mm




0001 Banana Yellow  
4.0 mm



0132 Spicy Green  
4.0 mm



0052 Oxyd Grey  
4.0 mm

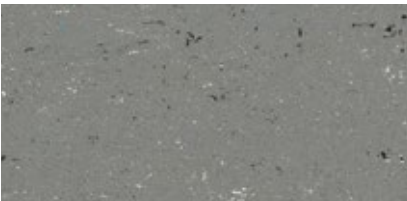

0059 Stone Grey  
4.0 mm



0080 Elephant Grey  
4.0 mm


## Uni Walton Acoustic Plus




19 dB

Neocare™


4 mm

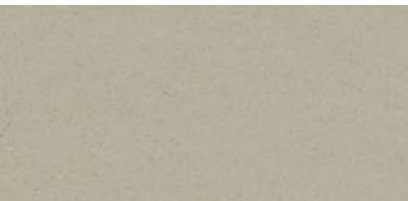


0085 Warm Concrete Grey  
4.0 mm

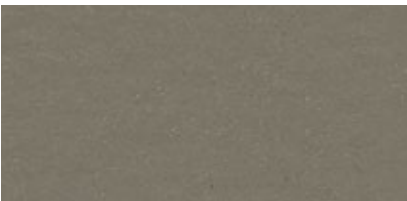


0058 Clay Grey  
4.0 mm

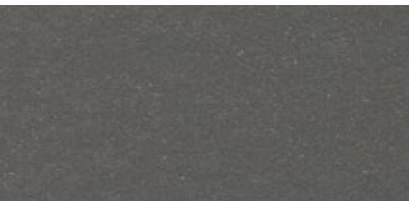


0083 Architects Grey  
4.0 mm

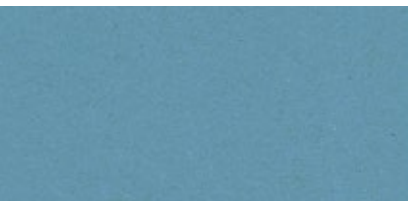

0095 Spring Blue  
4.0 mm

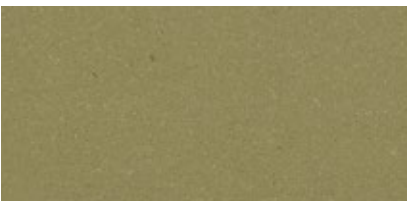

0090 Olive  
4.0 mm

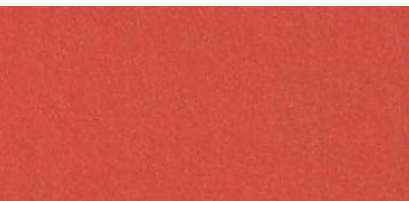

0010 Pompeji Red  
4.0 mm


## Lino Art Urban Acoustic Plus




19 dB

Neocare™


4 mm

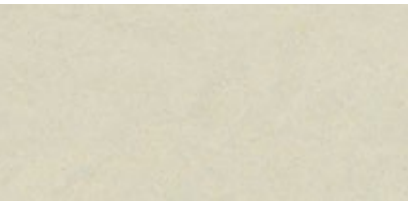


0564 Natural Stone  
4.0 mm

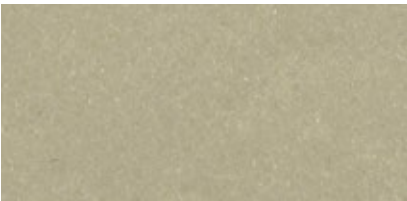


0556 Mud Grey  
4.0 mm

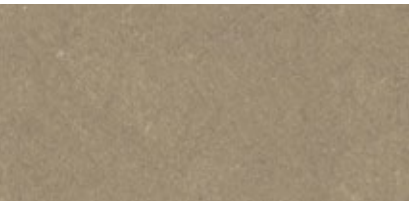

0558 Screed Grey  
4.0 mm

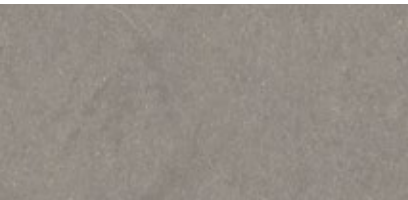

0554 Concrete Grey  
4.0 mm

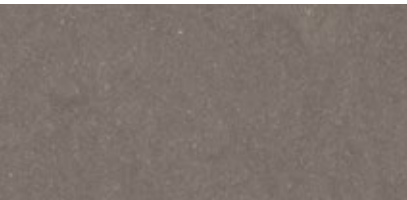

0553 Dark Concrete Grey  
4.0 mm




0561 Pitch Black  
4.0 mm

All other colours can be manufactured in AcousticPlus 19 dB version. Special request - Minimum order quantity: 58 sqm.




# Technic Linoleum

## Linodur - High Mechanical Traffic Resistance

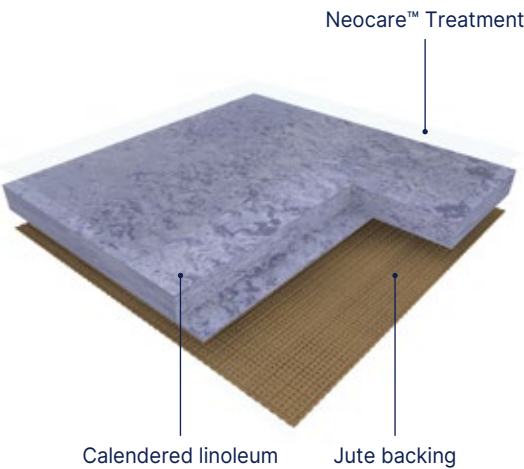

**LINODUR** is a calendered linoleum compact floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high pedestrian and mechanical traffic areas. Its weight is 4700g/sqm in 4.0mm. It features a modern design with a fine grain effect and is composed of 98% natural materials (linseed oil, wood flour, resins, minerals and jute fabric) among of which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The Camouflage welding rod makes the connections between the strips invisible. It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801. The flooring is 100% recyclable, is composed of up to 32% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. This product is manufactured in a plant awarded with ISO 9001 (quality), ISO 14 001 (environment) and ISO 50001 (energy) certifications. The product also benefits from international certifications such as Floorscore® and Blue Angel (emissions).

## Marmorette LCH - Dissipative Linoleum For ESD Areas

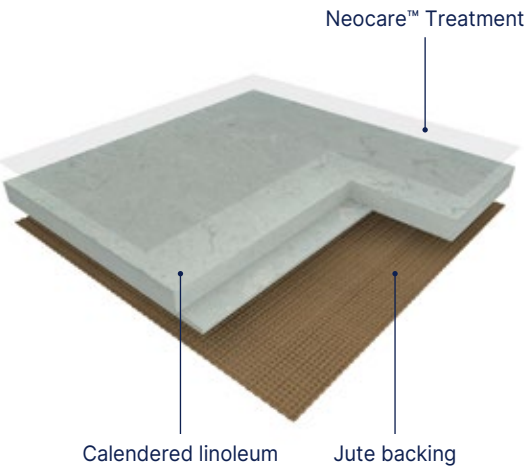

**MARMORETTE LCH** is a calendered linoleum compact dissipative floorcovering in sheet, 2m wide, providing excellent resistance to everyday wear and tear in high traffic areas. Its vertical resistance is  $10^6 < R < 10^8 \Omega$ . Its weight is 3000g/sqm in 2.5mm. It features a marbled design and presents a matt finish, is composed of 98% natural materials (linseed oil, wood flour, resins, cork, minerals and jute fabric) among of which 76% are rapidly renewable. The flooring is produced with Neocare™ solvent-free surface treatment, an exclusive photo-cured acrylate based lacquer surface treatment obtained by triple laser UV cross linking. Neocare™ offers excellent scratch resistance as well as resistance to chemicals found in aggressive environments such as bleach, hydro alcoholic solutions, Betadine and Eosin as well as markers making maintenance easier and increasing the life of the flooring. This treatment avoids performing any polishing throughout the lifetime of the product. It can however be polished following usual recommendations and according to the customer's wishes. The flooring is 100% recyclable, is composed of minimum 25% recycled content and up to 40% recycled content, 100% controlled, is REACH compliant and rated Cfl-s1 for fire resistance. It is designed and manufactured in a sustainable way in a plant awarded with ISO 9001 (quality), ISO 14001 (environment) and ISO 50001 (energy) certifications. The Camouflage welding rod makes the connections between the strips invisible. It is antistatic, antibacterial according to ISO 22196 / JIS Z 2801.

## Linodur - High Mechanical Traffic Resistance




1020 Spring Blue  
4.0 mm

^ Scale 1



1024 Speckled Blue  
4.0 mm

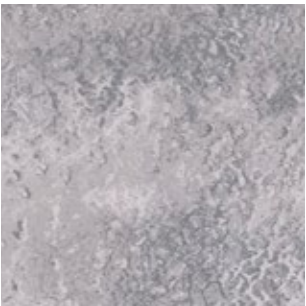

1056 Marble Grey  
4.0 mm



0020 Spring Blue



1081 Sporty Black  
4.0 mm





1011 Avocado Green  
4.0 mm



1072 Peach Orange  
4.0 mm

## Marmorette LCH - Dissipative Linoleum for ESD areas

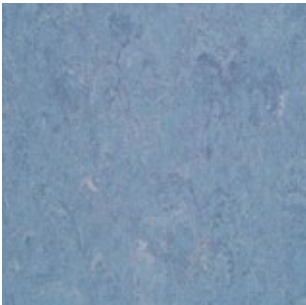


0020 Spring Blue  
2.5 mm



0055 Ash Grey  
2.5 mm




Finishes

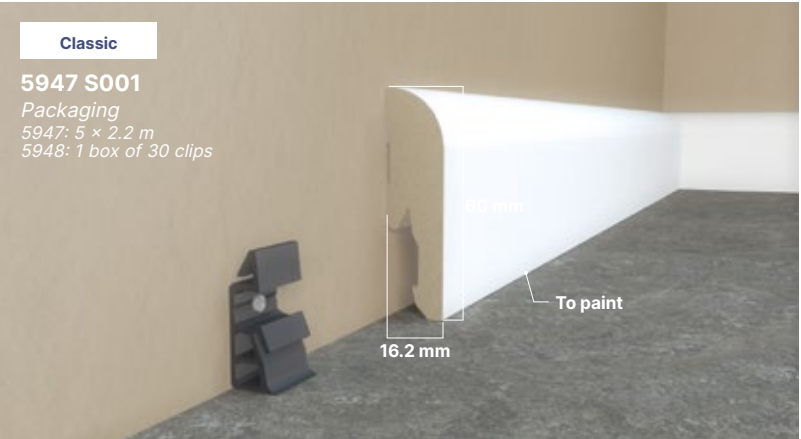

MDF  
Color: White




Cove Former  
Color: 6512

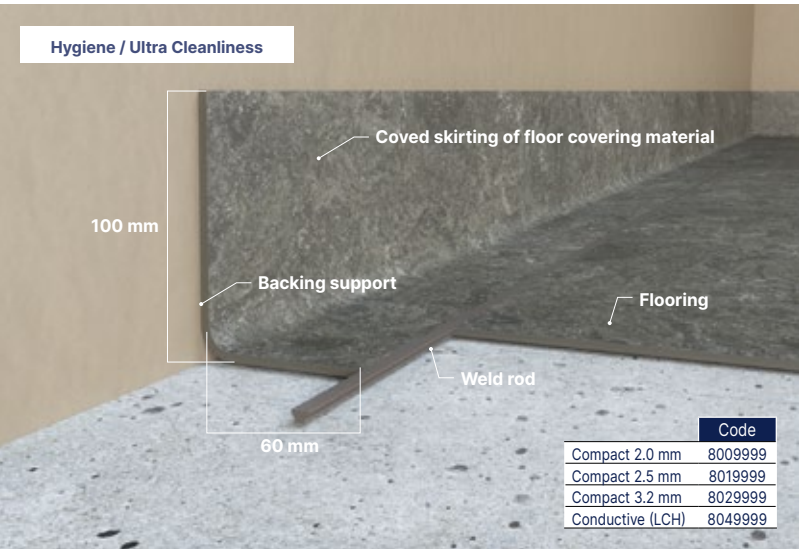


HSLA

Welding rods

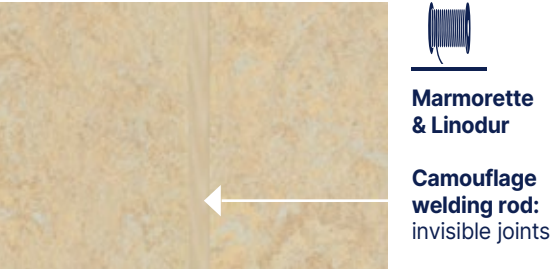

Welding rod matching table available on: gerflor.com

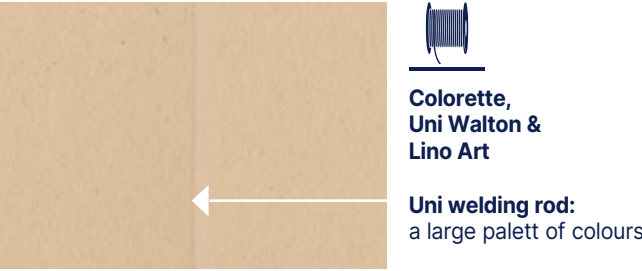

Cleaning Neocare™-Treated Linoleum Floors

Marmorette / Colorette / Uni Walton / Lino Art

**Damp sweeping equipment**  
Flexible mop preferably fitted with disposable, antistatic and/or pre-impregnated gauze strips

**Single disk machine**

**Manual washing equipment**  
Disposable microfibre mop or gauze

**Autoscrubber**

**Mechanical cleaning disk**  
3M (or equivalent) colour disks

	Equipment used	Cleaning products	Cleaning methods
First use			
Manual or mechanical cleaning	or  if soiled	Neutral detergent or Alkaline detergent	<ul style="list-style-type: none"><li>Damp sweeping</li><li>Mechanical washing at 160-200 rpm (with water recovery)</li></ul>
Daily cleaning		Neutral detergent / Disinfectant detergent <sup>(1)</sup>	<ul style="list-style-type: none"><li>Damp sweeping</li><li>Manual washing with flat mop</li><li>Rinsing</li></ul>
OR			
Mechanical cleaning		Neutral detergent	<ul style="list-style-type: none"><li>Damp sweeping</li><li>Mechanical washing at 160-200 rpm (with water recovery)</li></ul>
Deep cleaning	or	Alkaline detergent	<ul style="list-style-type: none"><li>Damp sweeping</li><li>Mechanical washing at 160-200 rpm (with water recovery)</li></ul>

(1) In areas where disinfection is essential (e.g. operating theatres, hospital rooms, etc.), alternate between using neutral detergent and amine-free disinfectant detergent.  
These cleaning instructions have to be adapted depending on traffic and location of the area.

Gerflor DLW flooring products are to be installed in full accordance with Gerflor DLW installation instructions and recognized trade standards.

An effective, regular cleaning and maintenance program is vital for retaining a high appearance level. Gerflor DLW flooring products should only be used as floorcoverings.

Note: Gerflor DLW reserve the right to amend this specification without giving prior notice. For the latest versions of the technical specifications, check our website: [www.gerflor.com](http://www.gerflor.com)

**INSTALLATION & MAINTENANCE GUIDELINES AVAILABLE ON GERFLOR.COM**