



Tiles & planks
Senso Collection

Floor for the home
2025 Collection

Gerflor®



SENSO CLIC



Direct laying on ceramic
Max 5mm / 2mm



Bay window installation
Max 60°



Traffic resistant
Wear layer 0,4mm **NEW**



Scan and
discover
INTERIOR
DESIGNER




- 1-Pecan Light**
Size: 123.9 x 21.2 cm
Code: 6121 1300 - EAN: 3475710632952
- 2-Simba Nature**
Size: 123.9 x 21.2 cm
Code: 6121 1028 - EAN: 3475710643187
- 3-Pecan Nature**
Size: 123.9 x 21.2 cm
Code: 6121 0950 - EAN: 3475710643170
- 4-Columbia Pearl**
Size: 123.9 x 21.2 cm
Code: 6121 0954 - EAN: 3475710643217
- 5-Pecan**
Size: 123.9 x 21.2 cm
Code: 6121 0511 - EAN: 3475710632969





0955 - Lord Honey

- 1-Scandinav Light**
Size: 123.9 x 21.2 cm
Code: 6121 1515 - EAN: 3475710643248
- 2-Scandinav Medium**
Size: 123.9 x 21.2 cm
Code: 6121 1512 - EAN: 3475710632945
- 3-Scandinav Honey**
Size: 123.9 x 21.2 cm
Code: 6121 1513 - EAN: 3475710643231
- 4-Lord Honey**
Size: 123.9 x 21.2 cm
Code: 6121 0955 - EAN: 3475710632938
- 5-Scandinav Dark**
Size: 123.9 x 21.2 cm
Code: 6121 1514 - EAN: 3475710643224

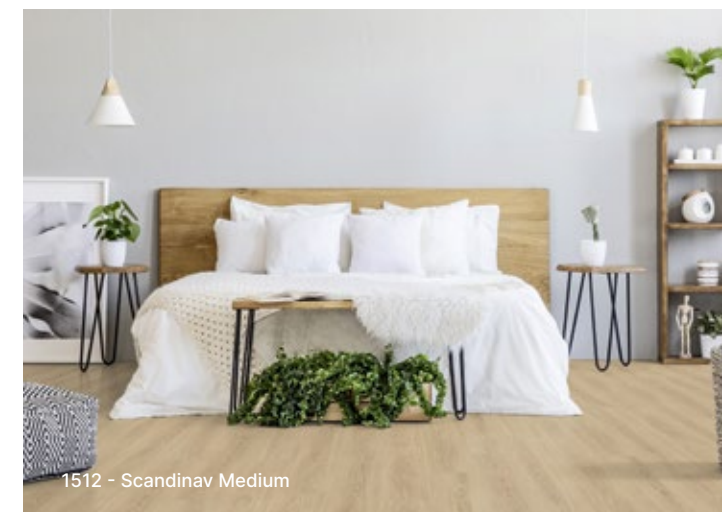

1512 - Scandinav Medium



1

2

3

4

5



1-Travertin Ivory
Size: 72.9 × 38.9 cm
Code: 6122 1511 - EAN: 3475710645785

2-Pietra Beige
Size: 72.9 × 38.9 cm
Code: 6122 1510 - EAN: 3475710645778



1511 - Travertin Ivory



1-Gotha Clear
Size: 72.9 × 38.9 cm
Code: 6122 0938 - EAN: 3475710645761

2-Pepper Taupe
Size: 72.9 × 38.9 cm
Code: 6122 0889 - EAN: 3475710646034

3-Shale Black
Size: 72.9 × 38.9 cm
Code: 6122 1297 - EAN: 3475710632983



Technical Characteristics

Description				
Total thickness	EN ISO 24346	mm	4.20	
Thickness of wearlayer	EN ISO 24340	mm	0.40	
Weight: Mass per unit area	EN ISO 23997	g/sqm	6700	
Size	EN ISO 24342	cm	planks: 21.2 × 123.9	tiles: 38.9 × 72.9
Number of planks / tiles and sqm per box	-	planks / tiles	8 planks / 2.10 sqm	7 tiles / 1.98 sqm
Classification				
Norm / Product specification	-	-	EN ISO 10582	
Fire rating - Classification	EN 13501-1	class	B _{fl} -s1	
Static electrical propensity	EN 1815	kV	< 2	
Performance				
Wear resistance	EN 660.2	mm ³	≤ 2.0	
Wear group	-	group	T	
Type binder content	ISO 10582	type	I	
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.15	
Dimensional stability (average measured value)			0.05	
Residual indentation	EN ISO 24343-1	mm	≤ 0.10	
Sound insulation	EN ISO 717-2	dB	4	
Room impact noise	NF S 31074	dB	79	
Castor chair test (Type W)	ISO 4918	-	OK	
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	
Colour fastness	EN 20 105 - B02	degree	≥ 6	
Surface treatment	-	-	Pureclean+®	
Chemical products resistance	EN ISO 26987	class	OK	
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m ³	< 10	
CE Marking				
	EN 14041	   		

Areas of use: domestic use

Phthalate free
(except recycled content)

REACH
Composition
100 % REACH

SCAN AND DISCOVER

- The complete range
- Laying
- Video installation

ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: +61 1 800 060 785
New Zealand Tel: + 64 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

CZECH REPUBLIC & SLOVAKIA: Gerflor CZ s.r.o.
Tel: +420 725 815 902

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor
Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95
e-mail: serviceconso@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0)22 41-25 30-0
e-mail: gerflormipolam@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerfloriri@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o.
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorrussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor USA
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com



we care / we act Our Commitments for a Sustainable future


CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025


BIOSOURCED CONTENT**
10 % by 2025


RECYCLED CONTENT
30 % by 2025


ADHESIVE FREE***
35 % by 2025


ANNUAL VOLUME RECYCLED
60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution