



Tiles & planks
Senso Collection

Floor for the home
2025 Collection

Gerflor®



SENSO SELF-ADHESIVE

**Installed quickly
& easily!**



Ultra-Realistic

4 bevelled edges
Textured surface



Quick & Easy Installation

No glue, no joints, no spacers
Can be cut with a utility knife
Dust-free



Scan and
discover
INTERIOR
DESIGNER

SENSO RUSTIC



0394 - White Pecan

1-White Pecan

AS: Size: 91.4 × 15.2 cm
Code: 3325 0394 - EAN: 3475710304651

2-Kola

AS: Size: 91.4 × 15.2 cm
Code: 3325 0309 - EAN: 3475710247538

3-Imperial Pearl

AS: Size: 91.4 × 15.2 cm
Code: 3325 1014 - EAN: 3475710602320

4-Pecan

BD: Size: 91.4 × 15.2 cm
Code: 3327 0511 - EAN: 3475710250385

5-Muscade


BD: Size: 91.4 × 15.2 cm
Code: 3327 0306 - EAN: 3475710250408

6-Noisette

BD: Size: 91.4 × 15.2 cm
Code: 3327 0311 - EAN: 3475710250392

7-Cleveland Dark


VS: Size: 91.4 × 15.2 cm
Code: 3325 0728 - EAN: 3475710606106

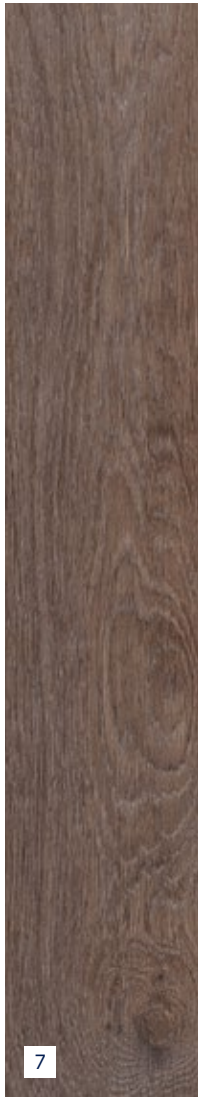

0306 - Muscade

SENSO NATURAL

- 1-Sunny Light**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0996 - EAN: 3475710551550
- 2-Columbia**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0347 - EAN: 3475710391088
- 3-Noyer Naturel**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0018 - EAN: 3475710235238
- 4-Authentic Nature**
VS: Size: 91.4 × 15.2 cm
Code: 3280 0577 - EAN: 3475710602122
- 5-Travertin**
VS: Size: 30.5 × 60.9 cm
Code: 3374 0201 - EAN: 3475710320385
- 6-Night Slate**
VS: Size: 30.5 × 60.9 cm
Code: 3374 0397 - EAN: 3475710319419



LVT Tiles
Self adhesive



1-Ceruse Blanc
VS: Size: 91.4 × 15.2 cm
Code: 3326 0301 - EAN: 3475710247897

2-Wallstreet Light
Size: 30.5 × 60.9 cm
Code: 3375 0702 - EAN: 3475710391095



Technical Characteristics

			PLANKS	TILES
Description				
Total thickness	EN ISO 24346	mm	2.00	2.00
Thickness of wearlayer	EN ISO 24340	mm	0.20	0.20
Weight: mass per unit area	EN ISO 23997	g/sqm	3920	3425
Size	EN ISO 24342	cm	planks: 91.4 × 15.2	tiles: 30.5 × 60.9
Number of planks / tiles and sqm per box	-	planks / tiles	16 planks / 2.20 sqm	12 tiles / 2.22 sqm
Classification				
Norm / Product specification	-	ISO 10582	ISO 10582	ISO 10582
Fire rating - Classification	EN 13501-1	class	Bfl S1	Bfl S1
Static electrical propensity	EN 1815	-	< 2 kV	< 2 kV
Slip resistance wet: ramp test with oil	DIN 51130	class	R9	R9
Performance				
Wear group	EN 649	group	T	T
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.25	≤ 0.25
Residual Indentation	EN ISO 24343-1	mm	0.05	0.05
Impact sound insulation	EN ISO 717-2	dB	3	3
Room impact noise	NF S 31074	class	C	C
Thermal conductivity	EN ISO 10456	W(m.k)	0.25	0.25
Colour fastness	EN 20 105 - B02	degree	≥ 6	≥ 6
Surface treatment	-	-	PUR	PUR
Garantee for residential use	-	year	10	10
Environment / Indoor Air Quality				
TVOC after 28 days	ISO 16000-6	µg/m³	< 100	< 100
VOC rating (French norm)	-	-	A+	A+

CE Marking				
CE	EN 14041			

Areas of use: domestic use



SCAN AND DISCOVER

- The complete range
- Laying
- Video installation

ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: +61 1 800 060 785
New Zealand Tel: + 64 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

CZECH REPUBLIC & SLOVAKIA: Gerflor CZ s.r.o.
Tel: +420 725 815 902

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor
Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95
e-mail: serviceconso@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0)22 41-25 30-0
e-mail: gerflormipolam@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o.
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor USA
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com



we care / we act Our Commitments for a Sustainable future


CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025


BIOSOURCED CONTENT**
10 % by 2025


RECYCLED CONTENT
30 % by 2025


ADHESIVE FREE***
35 % by 2025


ANNUAL VOLUME RECYCLED
60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution