



Tiles & planks
Senso Collection

Floor for the home
2025 Collection

Gerflor®

NEW



SENSO UNIK

Looselay it's done
no clic no glue



Unlimited design pattern



Easy to install



Easy to replace



Acoustic comfort

LVT Tiles
Looselay



Scan and
discover
INTERIOR
DESIGNER

NEW



1-Soleiado
Size: 61 x 11.4 cm
Code: 3992 1618 - EAN: 3475710654916

2-Madera Miel
Size: 61 x 11.4 cm
Code: 3992 1616 - EAN: 3475710654893

3-Madera Castano
Size: 61 x 11.4 cm
Code: 3992 1617 - EAN: 3475710654909

4-Madera Natural
Size: 61 x 11.4 cm
Code: 3992 1615 - EAN: 3475710654886



1617 Madera Castano
1615 Madera Natural
1616 Madera Miel
1618 Soleiado

NEW




1-Madera Beige
Size: 121.9 × 20.3 cm
Code: 3994 1623 - EAN: 3475710655036

2-Madera Miel
Size: 121.9 × 20.3 cm
Code: 3994 1616 - EAN: 3475710655043

3-Madera Natural
Size: 121.9 × 20.3 cm
Code: 3994 1615 - EAN: 3475710655029





1615 Madera Natural / 1618 Soleiado

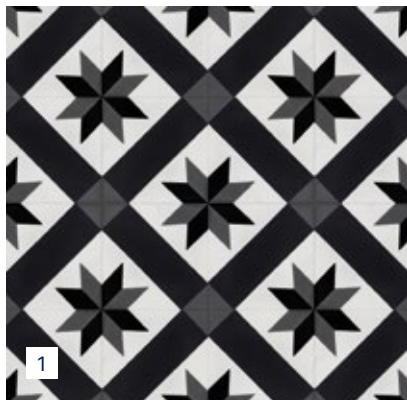

1-Cordoba Black
Size: 61 × 61 cm
Code: 3993 1034 - EAN: 3475710655012

2-Soleiado
Size: 61 × 61 cm
Code: 3993 1618 - EAN: 3475710654992

3-Nomade
Size: 61 × 61 cm
Code: 3993 1620 - EAN: 3475710654961

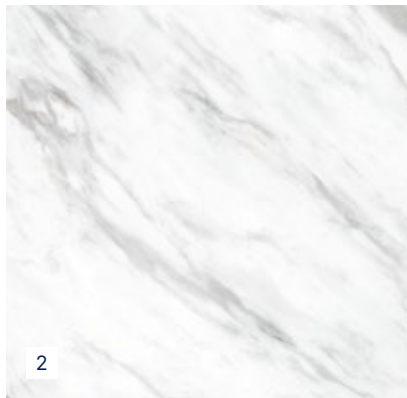



↑
OR
↓




1620 Nomade




NEW

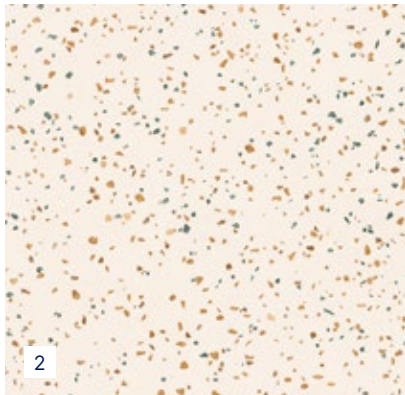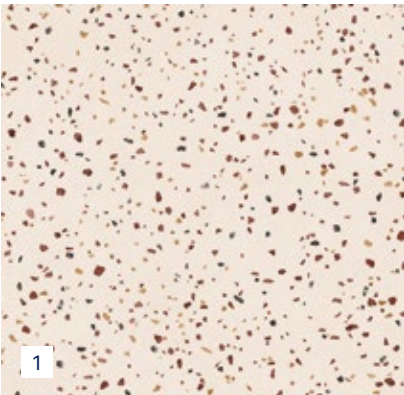

- 1-Felizia Ocre**
Size: 61 × 61 cm
Code: 3993 1621 - EAN: 3475710654947
- 2-Felizia Azure**
Size: 61 × 61 cm
Code: 3993 1622 - EAN: 3475710654954
- 3-Suave Grey**
Size: 61 × 61 cm
Code: 3993 9077 - EAN: 3475710654985
- 4-Suave Beige**
Size: 61 × 61 cm
Code: 3993 1619 - EAN: 3475710654978



1621 Felizia Ocre / 1616 Madera Miel

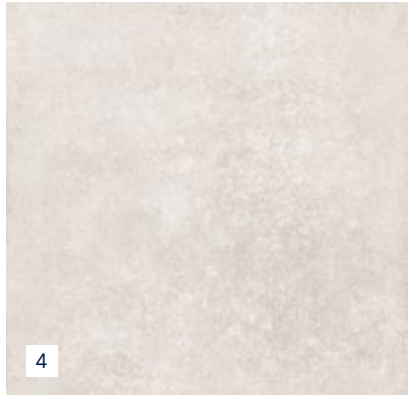

Technical Characteristics

Description					
Total thickness	EN ISO 24346	mm	3.5		
Thickness of wearlayer	EN ISO 24340	mm	0.4		
Weight: Mass per unit area	EN ISO 23997	g/sqm	4665		
Size	EN ISO 24342	cm	planks: 20.3 × 121.9	planks: 11.4 × 61	tiles: 61 × 61
Number of planks / tiles and sqm per box	-	planks / tiles	12 planks / 2.97 sqm	36 planks / 2.51 sqm	6 tiles / 2.23 sqm
Classification					
Norm / Product specification	-	-	EN ISO 11638		
Fire rating - Classification	EN 13501-1	class	B _{f1} -s1		
Static electrical propensity	EN 1815	kV	< 2		
Slip resistance wet: ramp test with oil	DIN 51130	class	R9		
Performance					
Wear Resistance	EN 660.2	mm³	< 2.0		
Wear group	EN 649	group	T		
Type Binder content	EN ISO 11638	group	I		
Dimensional stability after exposure to heat	EN ISO 23999	%	≤ 0.15		
Dimensional stability (average measured value)	-	%	≤ 0.10		
Residual indentation	EN ISO 24343-1	mm	≤ 0.15		
Sound insulation	EN ISO 717-2	dB	17		
Room impact noise	NF S 31074	dB	72		
Castor chair test	ISO 4918	-	OK		
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25		
Colour fastness	EN 20 105 - B02	degree	≥ 6		
Surface treatment	-	-	PUR+ Matt		
Chemical Products Resistance	EN ISO 26987	-	OK		
Environment / Indoor Air Quality					
TVOC after 28 days	ISO 16000-6	µg/m³	< 100		
CE Marking					
	EN 14041	-	  		
Areas of use: domestic use					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					
					

SCAN AND DISCOVER

- The complete range
- Laying
- Video installation



ASIA: Gerflor Asia
Tel: +852 9222 6355 - Fax: +852 3006 1449
e-mail: gerflorasia@gerflor.com

AUSTRALIA/NEW ZEALAND: Gerflor Australasia Pty. Ltd
Australia Tel: +61 1 800 060 785
New Zealand Tel: + 64 0 800 630 119
e-mail: gerflor@gerflor.com.au

AUSTRIA/SWITZERLAND: Gerflor GmbH
Tel: +43 (0)72 29/70 800-0 - Fax: +43 (0)72 29/70 800-218
e-mail: austria@gerflor.com - switzerland@gerflor.com

BELGIUM/LUXEMBURG: Gerflor Benelux
Tel: +32 (0)3 766 42 82 - Fax: +32 (0)3 766 29 14
e-mail: gerflorbe@gerflor.com

CANADA: Gerflor International
Tel: +1 438 333 0752 - Fax: +1 438 380 5425
e-mail: gerflorcanada@gerflor.com

CHINA: Gerflor floorings (China) Co. Ltd.
Tel: +86 21 6357 8818 - Fax: +86 21 6357 8998
e-mail: gerflorchina@gerflor.com

CZECH REPUBLIC & SLOVAKIA: Gerflor CZ s.r.o.
Tel: +420 725 815 902

FINLAND: Gerflor Oy
Tel: +358 (0) 10 6 17 5150 - Fax: +358 (0) 10 617 5152
e-mail: info@gerflor.fi

FRANCE: Gerflor
Tel: 00 33 4 75 50 68 68 - Fax: 00 33 4 75 50 69 95
e-mail: serviceconso@gerflor.com

GERMANY: Gerflor Mipolam GmbH
Tel: +49 (0)22 41-25 30-0
e-mail: gerflormipolam@gerflor.com

IRELAND: Gerflor Ltd
Tel: +353 (0) 42 966 1431 - Fax: +353 (0) 42 966 1759
e-mail: gerflorirl@gerflor.com

ITALY: Gerflor S.p.A.
Tel: +39 02 90 40 10 - Fax: +39 02 90 42 74 84
e-mail: gerfloritalia@gerflor.com

LATIN AMERICA (Brazil): Gerflor América Latina
Tel: +55 11 38 48 20 20
e-mail: gerflor@gerflor.com.br

MIDDLE EAST: Gerflor Middle East
Tel: +966 3 847 1779 - Fax: +966 3 847 1781
e-mail: info@gerflorme.com

NETHERLANDS: Gerflor Benelux
Tel: +31 (0)40 266 17 00 - Fax: +31 (0)40 257 46 89
e-mail: gerflornl@gerflor.com

OTHER COUNTRIES: Gerflor International
Tel: +33 (0)4 74 05 40 00 - Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

POLAND: Gerflor Polska Sp z o.o.
Tel: + 48 61 823 34 01 - Fax: + 48 61 823 34 33
e-mail: info@gerflor.pl

PORTUGAL: Gerflor Iberia, SA
Tel: +351 21 843 95 49 - Fax: +351 21 846 55 44
e-mail: gerflorportugal@gerflor.com

RUSSIA: Gerflor zao
Tel./Fax: + 7 495 785 23 71
e-mail: gerflorussia@gerflor.ru

SCANDINAVIA: Gerflor Scandinavia a.s.
Tel: + 47 64 95 60 70 - Fax: + 47 64 95 60 80
e-mail: gerflorscand@gerflor.no

SPAIN: Gerflor Iberia, SA
Tel: +34 91 653 50 11 - Fax: +34 91 653 25 85
e-mail: gerfloriberia@gerflor.com

UNITED KINGDOM: Gerflor Ltd
Sample service: Contractuk@gerflor.com
Office Tel: + 44 (0) 1926 622 600 - Fax: + 44 (0) 1926 401 647

USA: Gerflor USA
Tel: 877 GERFLOR (437 3567) - Fax: 847 394 3753
e-mail: info@gerflorusa.com



we care / we act Our Commitments for a Sustainable future


CARBON FOOTPRINT*
-20 % kg
CO₂ equivalent/m²
between 2020 and 2025


BIOSOURCED CONTENT**
10 % by 2025


RECYCLED CONTENT
30 % by 2025


ADHESIVE FREE***
35 % by 2025


ANNUAL VOLUME RECYCLED
60 000 t by 2025

Gerflor®

* Scopes 1 and 2 defined in the GHG protocol ** % of activity with biosourced materials *** % of activity - adhesive free solution