

pages 54-123

Taralay Millenium Cosmic Stellar

58. 60. 62.

Taralay Libertex 64.

68. Wood Amsterdam 70.

70. Paros 71. Reflect

Taralay Impression 72. Taralay Impression hop

78. 84. 85. 86. 86. 87. 88. 89. 91. 92. 92. 93. 94. 96. Wood Cemento

Terrazzo

Rough Riverside

Gentlemen

Pure Wool Finesse

Envol

Jungle Nido

Rice FlipKubes

Kubes

Metallic

Nest

Chess Happy Uni Matt

My Taralay Impression

102. Taralay Initial

104. Wood

108. Urban

108. Strada

109. Spider

Diversion 110.


111. Miami

112. Nerok

114. Nerok 55 114. Nerok 70

120. Tarastep Pro


56

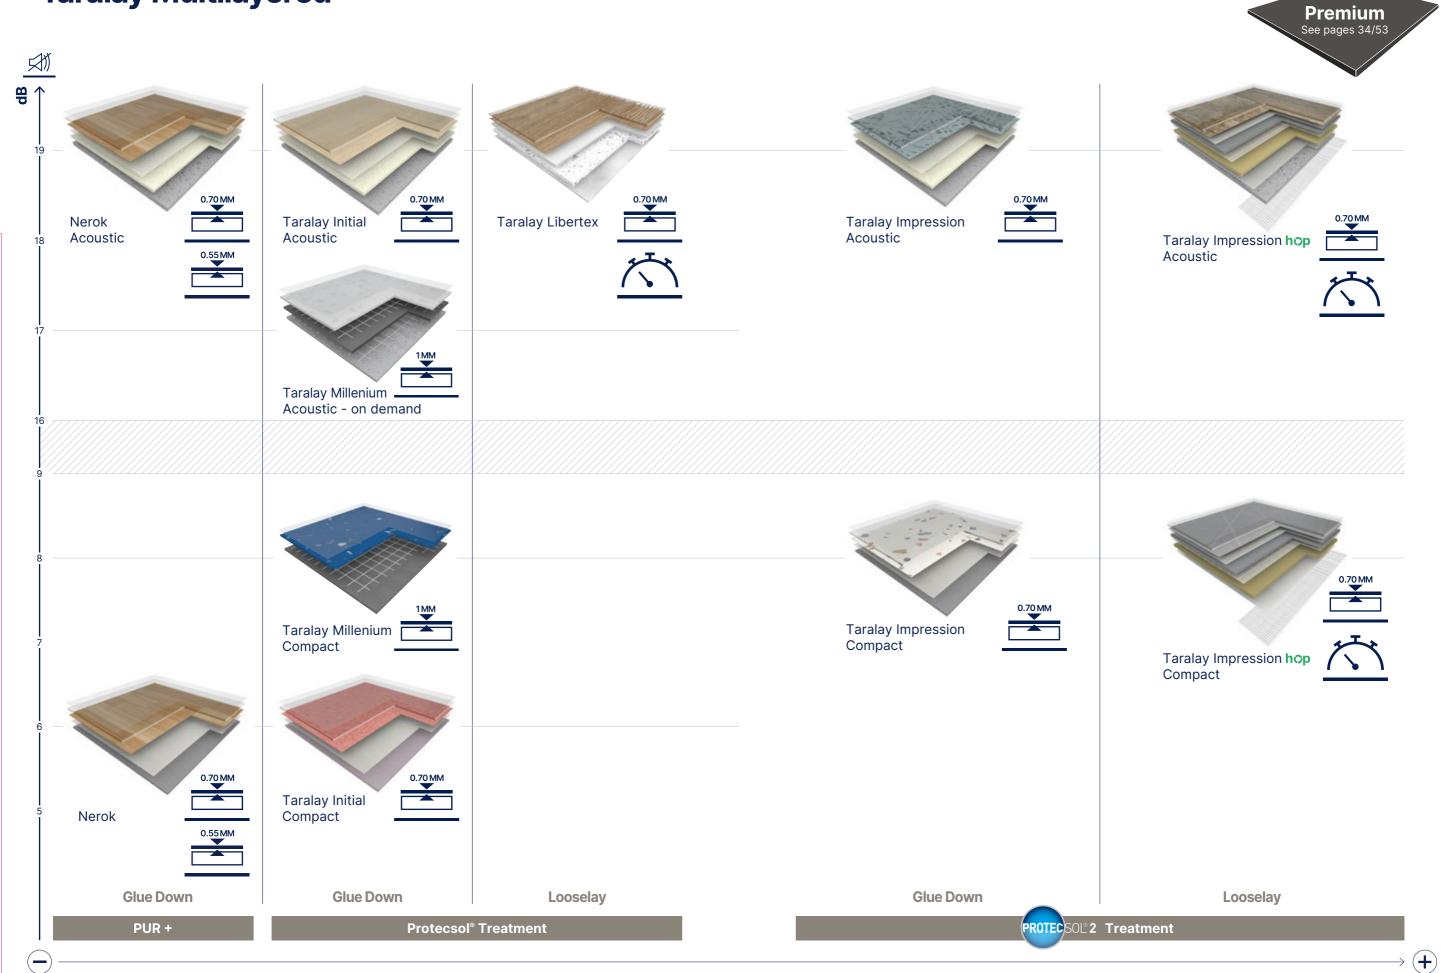

Maintenance

Taralay Impression


Taralay Impression Compact



TARALAY IMPRESSION COMPACT 0,7 is a multi-layered vinyl floorcovering, integrating a fiber glass and a printed design. It's available in 2 m wide sheet, with a group T wear rating. Total width of the product is 2 mm, including a transparent wear layer of 0.70 mm thick. It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm. Its dimensional stability performs down to 0,08% (average measure).

TARALAY IMPRESSION COMPACT is made in France. It's 100% recyclable, and the floorcovering will have its individual EPD sheet. The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product. It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg / m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA): >99% after 24 hours according to ISO22196.

Taralay Impression Acoustic



TARALAY IMPRESSION ACOUSTIC 0,65 is a multi-layered vinyl floorcovering, integrating a Very High Density foam backing, reinforced with a fiber glass and a printed design. It's available in 2 m wide sheet, with a group T wear rating.

Total width of the product is 3,35 mm, including a transparent wear layer of 0.65 mm thick. It offers 19 dB sound insulation and an indentation resistance of ca. 0.08 mm. Its dimensional stability performs down to 0,08% (average measure).

TARALAY IMPRESSION ACOUSTIC is made in France, with green electricity. It's 100% recyclable, and the floorcovering will have its individual EPD sheet.

The flooring is equipped with Protecsol® 2, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the product.

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent. bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg / m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA): >99% after 24 hours according to ISO22196.











• Ultra-realistic designs:

Realistic embosses and plank dimensions for wood designs

- Matt effect
- Extreme stain resistance, easy maintenance: Protecsol® 2 surface treatment (patented technology by Gerflor)
- · High traffic resistance, long-lasting appearance Available with a 0.7 mm wearlayer and available with a 0.9 mm wearlayer upon request (minimum order quantity of 800 sqm)
- The best acoustic / indentation performance on the market

COMPACT: 0.03 mm / 8 dB ACOUSTIC: 0.08 mm / 19 dB

• Eco-responsible solution Best in class for indoor air quality

(TVOC < 10 microgram/m³ after 28 days)

| | | | Taralay Impression
Compact | Taralay Impression
Acoustic |
|--|--|--------------------------|-------------------------------|---------------------------------------|
| Description | | | | |
| Total thickness | EN ISO 24346 | mm | 2.00 | 3.35 |
| Wearlayer Thickness | EN ISO 24340 | mm | 0.70 | 0.65 |
| Weight | EN ISO 23997 | g/sqm | 2635 | 2825 |
| Width of sheet | EN ISO 24341 | cm | 200 | 200 |
| Length of sheet | EN ISO 24341 | lm | 25 | 25 |
| Classification | | | | |
| Norm / Product specification | - | - | EN ISO 10582 | EN ISO 11638 |
| European classification | EN ISO 10874 | class | 34-43 | 34-42 |
| Fire rating | EN 13501-1 | class | BfI-s1 | BfI-s1 |
| Static electrical propensity | EN 1815 | kV | < 2 | < 2 |
| Slip resistance | EN 16165:2021 –
Appendix B (DIN 51 130) | class | R10 | R10 |
| Performances | | | | |
| Vear resistance | EN 660.2 | mm³ | ≤ 2.0 | ≤ 2.0 |
| Vear group | - | group | T | Т |
| Type Binder content | EN ISO 10582 | type | 1 | - |
| Dimensional stability (requirement) | EN ISO 23999 | % | ≤ 0.40 | ≤ 0.40 |
| Dimensional stability (measured value) | - | % | 0,08 | 0,08 |
| Residual indentation (requirement) | EN ISO 24343-1 | mm | ≤ 0.10 | ≤ 0.20 |
| Residual indentation
(average measured value) | - | mm | ≃ 0.03 | ≃ 0.08 |
| mpact sound insulation | EN ISO 717-2 | dB | 8 | 19 |
| Castor chair test (type H) | ISO 4918 | - | OK | OK |
| Thermal conductivity | EN ISO 10456 | W/(m.k) | 0.25 | 0.25 |
| Colour fastness | EN ISO 105-B02 | degree | ≥ 6 | ≥ 6 |
| Surface treatment | - | - | PROTECSOL® 2 | PROTECSOL® 2 |
| Chemical products resistance ⁽¹⁾ | EN ISO 26987 | - | OK | OK |
| Anti-bacterial activity
(E. coli - S. aureus - MRSA) after 24h ⁽²⁾ | ISO 22196 | - | > 99%
inhibits growth | > 99%
inhibits growth |
| Anti-viral activity
human coronavirus) after 2h ⁽²⁾ | ISO 21702 | | > 99.7%
virucidal activity | > 99.7%
virucidal activity |
| Environment / indoor quality air | | | | · · · · · · · · · · · · · · · · · · · |
| TVOC after 28 days | ISO 16000-6 | microgram/m ³ | < 10 | < 10 |
| Certification | | _ | Floorscore® | Floorscore® |



EN 14041









⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website. (2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay

Impression

Taralay Multilayered

Taralay Impression hop: the looselay solution

Eco-design valued at each stage of the life cycle

GERFLOR COMMITED

to communicating transparently about the carbon impact of its products and focusing on eco-design, including the use of sustainable raw materials, the sustainability of its products and circular economy

1- Raw materials

Recycled content



TVOC < 10 micrograms/m³



Reach compliant*

4- A second life made easier



100% recyclable



Uninstall and re-use:

- Flooring can be uninstalled without damaging either the product or the surface undermeath
- Flooring can be re-used for another building



Easy to recycle

- Qualifies for the the Second Life Programme
- Flooring is incorporated back into our production lines



FLCOR A unique partnership with Paprec, recycling programmes that are certified by Europlast







Accelerating recycling is essential for building a more circular economy. Preserving resources and reducing the carbon footprint of our business are our commitments for Sustainable Development.

25 of sechcled content

Easy to remove, re-use & recycle

2-Installation

made easy in busy environments



hop Reinforced holding tape!



Adhesive free



Reduced downtime



Adhesive free installation

Qualifies for the Second Life Programme

3-Use

Long-lasting performance



Protecsol® 2: stain resistant water-repellent surface saves water and detergent



Withstands wheeling heavy loads (straight or circular) ut to 500 kg




Excellent resistance to indentation 0.03 mm (compact) / 0.08mm (acoustic)



Excellent stability, even during temperature changes: expansion < 0.03%



Improved resistance to moisture



^{*} Registration, Evaluation and Authorisation of Chemicals

Taralay Impression hop

Taralay Impression hop Compact

TARALAY IMPRESSION HOP COMPACT 0,7 is a multi-layered vinyl floorcovering, integrating a double fiber frame and a printed design. It's available in 2 m wide sheet, with a group T wear rating. The system TARALAY IMPRESSION HOP COMPACT - floorcovering + holding tape « HOP tape », code 059E0001- enables to lay down flooring gluefree.

Thanks to its double fiber frame -fiber veil + fiber grid-, and its calendared interlaver, the floorcovering achieves a high level of **stability**, even under temperature variations and heavy rolling loads. It can be laid down onto various existing supports, including asbestos. Perfectly suitable for renovation or new buildings construction.

Without any glue, its end life removal is fast and easy. The Gerflor holding tape doesn't affect the support, to ease renovation. Re-use of the floorcovering, recycle or renovation are then facilitated. Total width of the product is 2,30 mm, including a transparent wear layer of 0.70 mm thick. It offers 8 dB sound insulation and an indentation resistance of ca. 0.03 mm. Its dimensional stability performs down to 0,03% (average measure).

TARALAY IMPRESSION HOP COMPACT is made in France.

It's made of 15% minimum post-consumed PVC, and goes up to

The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the

It is free of formaldehyde, heavy metals and CMR1&2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg/m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA): >99% after 24 hours according to ISO22196.

It's 100% recyclable, and the floorcovering will have its individual FPD sheet

Taralay Impression hop Acoustic

TARALAY IMPRESSION HOP ACOUSTIC 0,7 is a multi-layered vinyl floorcovering, integrating a double fiber frame, a Very High Density foam backing and a printed design. It's available in 2 m wide sheet, with a group T wear rating.

The system TARALAY IMPRESSION HOP ACOUSTIC floorcovering + holding tape « HOP tape », code 059E0001- enables

to lay down flooring gluefree. Thanks to its double fiber frame -fiber veil + fiber grid-, and its calendared interlayer, the floorcovering achieves a high level of **stability**, even under temperature variations and heavy rolling loads. It can be laid down onto various existing supports, including asbestos. Perfectly suitable for renovation or new buildings

Without any glue, its end life removal is fast and easy. The Gerflor holding tape doesn't affect the support, to ease renovation. Re-use of the floorcovering, recycle or renovation are then facilitated. Total width of the product is 4,35 mm, including a transparent wear layer of 0.70 mm thick. It offers 19 dB sound insulation and an indentation resistance of ca. 0.08 mm. Its dimensional stability performs down to 0,03% (average measure).

TARALAY IMPRESSION HOP ACOUSTIC is made in France. It's made of 15% minimum post-consumed PVC, and goes up to 25%

The flooring is equipped with **Protecsol® 2**, patented surface treatment obtained by UV laser cross-linking offering the best chemical resistance to the main products used in healthcare environment as betadine, eosin, hydro alcoholic solutions, making the maintenance easy and the floor long lasting. This treatment avoids applying any acrylic emulsion throughout the lifetime of the

It is free of formaldehyde, heavy metals and CMR 1 & 2 or vPvB (very persistent and very bio accumulative) or PBT (persistent, bio-accumulative and toxic) and is 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000-6) are below detection levels (<10 µg/m³) and this product is classified A + (the best class) and Floorscore® & M1 certified for indoor air quality. Taralay Impression Compact has antibacterial efficacy (E.coli / S.aureus / MRSA): >99% after 24 hours according to ISO22196.

It's 100% recyclable, and the floorcovering will have its individual EPD sheet.







19 dB Protecsol® 2



- Innovative & eco designed solution for looselay installation
- Gluefree solution means quick and easy: save up to 50% installation time
- 15% recycled content inside

- Protecsol®2 surface treatment: the best stain resistance thanks to water-repellent properties
- Acoustic version: VHD foam for an acoustic insulation (-19db) - walking wellness and low impact sound

| | | | Taralay Impression hop
Compact | Taralay Impression hop
Acoustic |
|--|--|--------------------------|-----------------------------------|------------------------------------|
| Description | | | | |
| Total thickness | EN ISO 24346 | mm | 2.30 | 4.35 |
| Wearlayer Thickness | EN ISO 24340 | mm | 0.70 | 0.70 |
| Weight | EN ISO 23997 | g/sqm | 3125 | 3670 |
| Width of sheet | EN ISO 24341 | cm | 200 | 200 |
| Length of sheet | EN ISO 24341 | lm | 20 | 20 |
| Classification | | | | |
| Norm / Product specification | - | - | EN ISO 10582 | EN ISO 11638 |
| European classification | EN ISO 10874 | class | 34-43 | 34-42 |
| Fire rating | EN 13501-1 | class | Bfl-s1 | Bfl-s1 |
| Static electrical propensity | EN 1815 | kV | < 2 | < 2 |
| Slip resistance | EN 16165:2021 –
Appendix B (DIN 51 130) | class | R10 | R10 |
| Performances | | | | |
| Wear resistance | EN 660.2 | mm³ | ≤ 2.0 | ≤ 2.0 |
| Wear group | - | group | T | T |
| Type Binder content | EN ISO 10582 | type | | 1 |
| Dimensional stability (requirement) | EN ISO 23999 | % | ≤ 0.40 | ≤ 0.40 |
| Dimensional stability (measured value) | - | % | 0,03 | 0,03 |
| Residual indentation (requirement) | EN ISO 24343-1 | mm | ≤ 0.10 | ≤ 0.20 |
| Residual indentation (average measured value) | - | mm | <i>≃</i> 0.03 | ≃ 0.08 |
| Impact sound insulation | EN ISO 717-2 | dB | 8 | 19 |
| Castor chair test (type H) | ISO 4918 | - | OK | OK |
| Thermal conductivity | EN ISO 10456 | W/(m.k) | 0.25 | 0.25 |
| Colour fastness | EN ISO 105-B02 | degree | ≥ 6 | ≥ 6 |
| Surface treatment | - | - | PROTECSOL® 2 | PROTECSOL® 2 |
| Chemical products resistance ⁽¹⁾ | EN ISO 26987 | - | OK | OK |
| Anti-bacterial activity
(E. coli - S. aureus - MRSA) after 24h ⁽²⁾ | ISO 22196 | - | > 99%
inhibits growth | > 99%
inhibits growth |
| Anti-viral activity
(human coronavirus) after 2h ⁽²⁾ | ISO 21702 | - | > 99.7%
virucidal activity | > 99.7%
virucidal activity |
| Environment / indoor quality air | | | | |
| TVOC after 28 days | ISO 16000-6 | microgram/m ³ | < 10 | < 10 |
| Certification | - | - | Floorscore® | Floorscore® |
| CE Marking | | | | |
| (6 | EN 14041 | | 7 | |

 (ϵ)







⁽¹⁾ Regarding the resistance to chemicals, please download the corresponding leaflet from our website. (2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Impression / Taralay Impression hop Wood Fusion / Rivau Nature
















Taralay Impression / Taralay Impression hop Habana 3D / Raintree

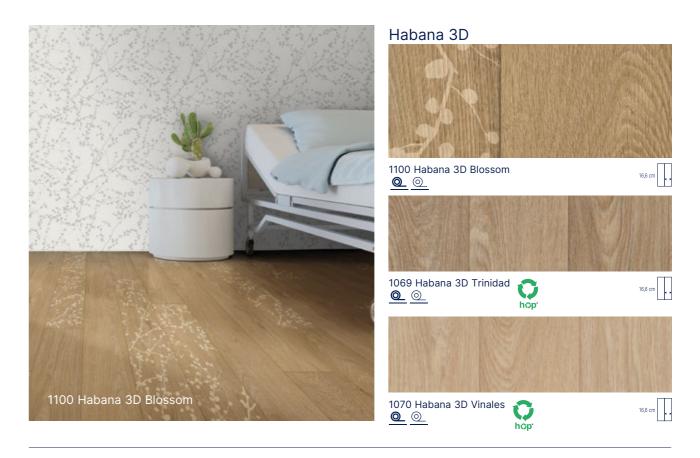






*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Nature Oak / Noma









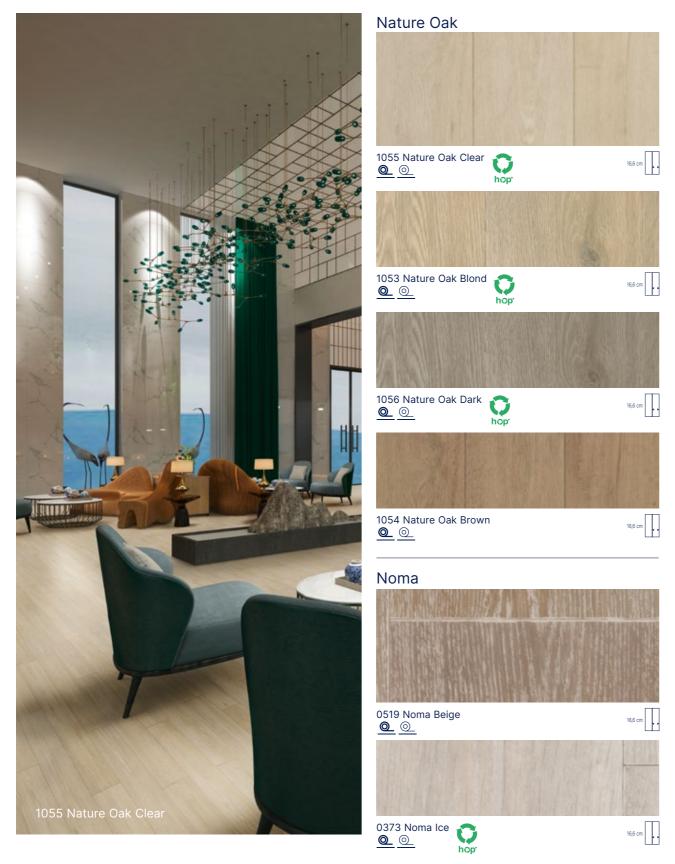

Taralay Impression / Taralay Impression hop Charme / Walnut / Moon Island

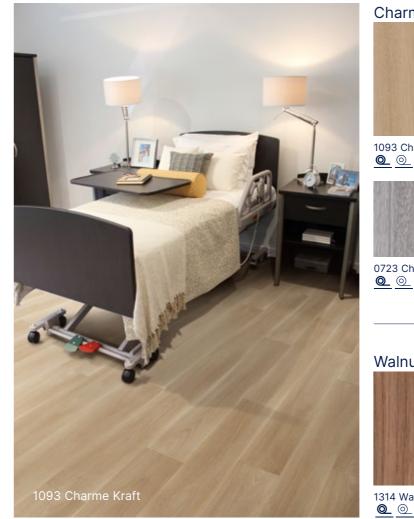

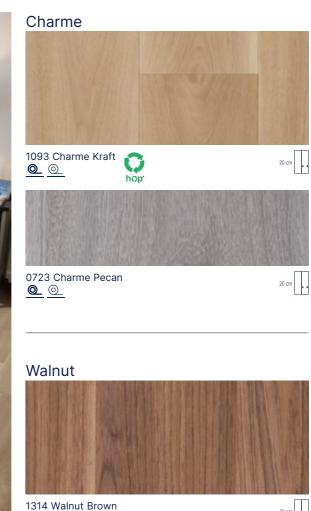





0760 Moon Island **Q O**

*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Sycamore / Portobello

















Taralay Impression / Taralay Impression hop Infinity

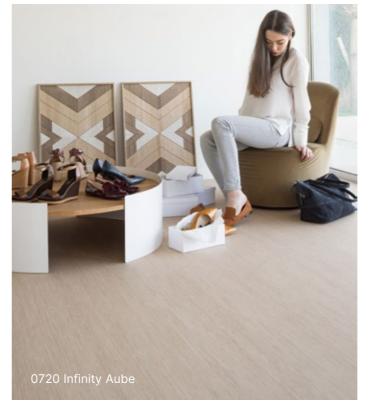



| | | Pattern Repeat | Planks Sizes |
|------------------|----------------------|----------------|----------------------------|
| Colour Reference | Colour Name | Width x Le | ngth (mm) |
| 0373 | Noma Ice | 1000×1000 | 166×1000 |
| 0519 | Noma Beige | 1000×1000 | 166×1000 |
| 0680 | Infinity Greige | 1000×1000 | No plank Continuous design |
| 0720 | Infinity Aube | 1000×1000 | No plank Continuous design |
| 0723 | Charme Pecan | 1000×1000 | 200×1000 |
| 0725 | Sycamore Light Brown | 1000×1000 | No plank Continuous design |
| 0727 | Sycamore Vanilla | 1000×1000 | No plank Continuous design |
| 0760 | Moon Island | 1000×1000 | 166×1000 |
| 0773 | Portobello | 1000×1000 | 166×1000 |
| 0923 | Happy Road | 2000×6000 | - |
| 1041 | Chess Black & White | 1000×1000 | 250×250 |
| 1053 | Nature Oak Blond | 2000×1000 | 166×1000 |
| 1054 | Nature Oak Brown | 2000×1000 | 166×1000 |
| 1055 | Nature Oak Clear | 2000×1000 | 166×1000 |
| 1056 | Nature Oak Dark | 2000×1000 | 166×1000 |
| 1069 | Habana 3D Trinidad | 1000×1000 | 166×1000 |
| 1070 | Habana 3D Vinales | 1000×1000 | 166×1000 |
| 1076 | Raintree Grey | 1000×1000 | 25 random lenght |
| 1077 | Raintree Natural | 1000×1000 | 25 random lenght |
| 1093 | Charme Kraft | 1000×1000 | 200×1000 |
| 1098 | Envol Black & White | 2000×6000 | - |
| 1099 | Envol Forest | 2000×6000 | - |
| 1100 | Habana 3D Blossom | 2000×6000 | 166×1000 |
| 1101 | Happy Form | 2000×6000 | - |
| 1102 | Happy Number Blue | 2000×3000 | - |
| 1103 | Happy Number Grey | 2000×3000 | - |
| 1104 | Wood Fusion Nature | 1000×6000 | 200 x random lenght |
| 1110 | Rivau Nature | 1000×1000 | 70×350 |
| 1314 | Walnut Brown | 1000×1000 | 100×1000 |

*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Cemento / Terrazzo





1024 Cemento Napoli



Cemento 1024 Cemento Napoli O hop 1026 Cemento Roma O O 0524 Cemento Capri © © 0523 Cemento Genova









1029 Rough Grey

1057 Riverside

Rough

Taralay Impression / Taralay Impression hop Rough / Riverside



1029 Rough Grey <u>©</u> <u>©</u>






1028 Rough Beige © ©

Riverside





Terrazzo



1059 Terrazzo Brescia **Q O**









1058 Terrazzo Black & White







*Available in Taralay Impression hop




∧ Scale 1

Taralay Impression / Taralay Impression hop Gentlemen / Pure Wool







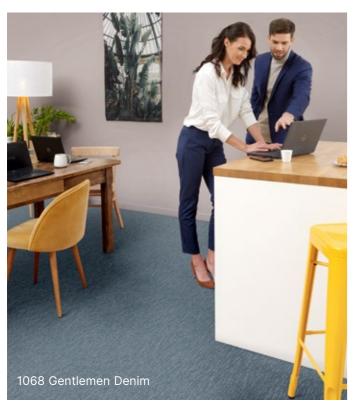

Gentlemen











Black & White





Pure Wool












*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Finesse

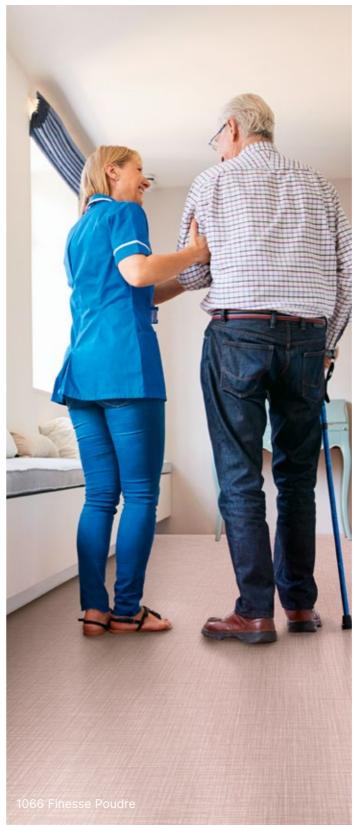



1066 Finesse Poudre **Q O**



∧ Scale 1

87









1064 Finesse Nature


<u>O</u> <u>O</u>

*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Envol / Jungle









Envol












o o

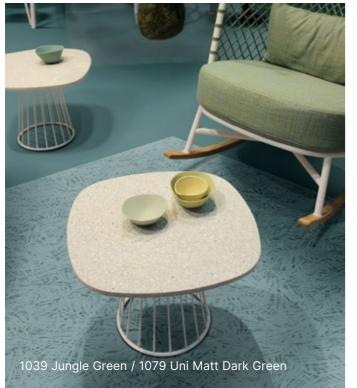


Jungle



1039 Jungle Green

O

O



1038 Jungle Copper © ©

1040 Jungle Grey ©

*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Nido / Rice









0736 Rice Champa

<u>O</u> <u>O</u>



0763 Rice Greige <u>O</u> <u>O</u>

89

0737 Rice Souris

<u>O</u> <u>O</u>


∧ Scale 1


Taralay Impression Kubes / Flipkube







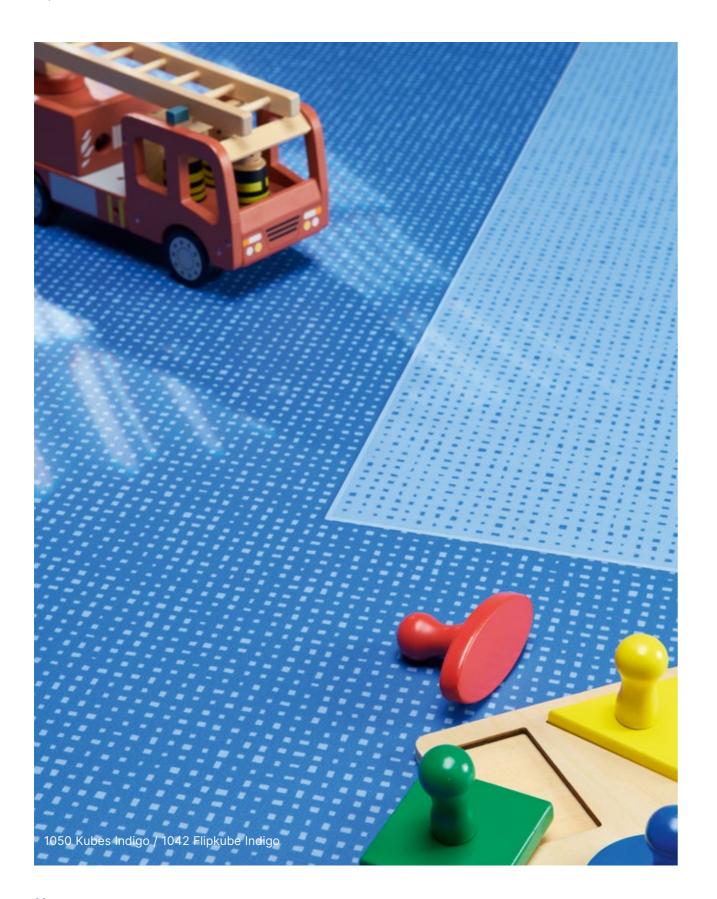








0755 Kubes White <u>O</u> <u>O</u> ∧ Scale 1



1030 Kubes Fuschia

O

O 1031 Kubes Carmine

O


O



1047 Kubes Lemon 1027 Kubes Corail <u>o</u> o <u>o</u> o



1046 Kubes Anis <u>O</u> O



1042 Flipkube Indigo

O

O



1045 Flipkube White <u>o</u> o



1044 Flipkube Lagoon

<u>O</u> <u>O</u>



1043 Flipkube Garden

O

O




Taralay Impression / Taralay Impression hop Metallic / Nest











1048 Metallic Gold



<u>o</u> o



92







1051 Nest Blue **Q O**









*Available in Taralay Impression hop

Taralay Impression / Taralay Impression hop Chess Black & White





Taralay Impression Happy Number / Happy Form







Taralay Impression Happy Road







1103 Happy Number Grey <u>O</u> <u>O</u>

∧ Scale 5%







Happy Road



0923 Happy Road


<u>O</u> <u>O</u>

Taralay Impression / Taralay Impression hop Uni Matt







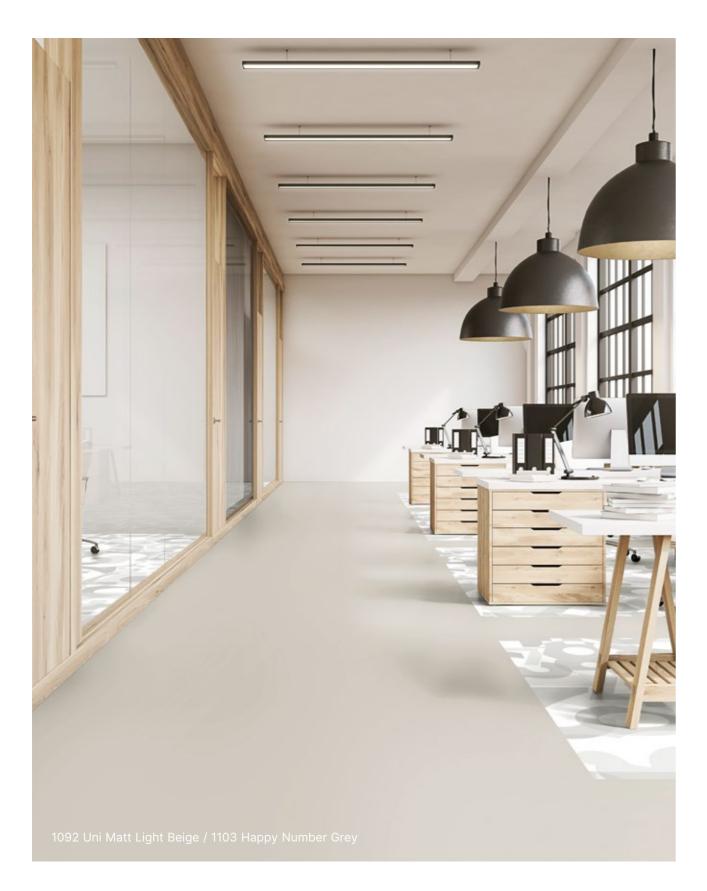



*Available in Taralay Impression hop

My Taralay Impression

Beyond the norm As you are unique and each of your projects represents a new challenge,

Gerflor gives you the chance to stand out, from 50sqm.

One atmosphere, one style, one floor, but several possibilities...

3 possibilities





1 - COLOUR

the possibility to recolour 32 designs in the Taralay Impression range as you wish



Select a design* from the Taralay Impression range



Change the colour



Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order

* from among 32 eligible designs (see Brochure My Taralay Impression)

"ENVOL" DESIGN STANDARD COLOUR SCHEME



CUSTOMISED COLOUR 1













My Taralay Impression



2 - COLLECTION

the possibility to select from among 50 exclusive designs




Draw inspiration from Gerflor's 50 exclusive designs and change, if you so wish, the design's colour scheme on www.myfloorbygerflor.com



View your customised design on your computer screen before approving it



Receive your floor sample within 10 days of acceptance of your inquiry by Gerflor



Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order



3 - CUSTOMISATION

the possibility to make your floor unique



Send us your own file in accordance with the process described in our specifications



Approval by our technical team



Receive your floor sample within 10 days and before all of your floor is made



Receive and install your customised flooring; delivery lead time: 6 weeks from receipt of your order











File formats accepted



Files free from copyright only



300 DPI resolution



RAL, Pantone and NCS colour reference



To enhance the visual identity of your company or that of your clients, you can have your logo printed across the width of the roll.





- No metallic ink
- No printing on a plain background
- Design only across the width (2 m)
- No continuity of designs over several rolls