



Taralay Multilayered

pages 54-123

58. Taralay Millenium

60. Cosmic
62. Stellar

64. Taralay Libertex

68. Wood
70. Amsterdam
70. Paros
71. Reflect

72. Taralay Impression Taralay Impression **hop**

78. Wood
84. Cemento
84. Terrazzo
85. Rough
85. Riverside
86. Gentlemen
86. Pure Wool
87. Finesse
88. Envol
88. Jungle
89. Nido
89. Rice
91. FlipKubes
91. Kubes
92. Metallic
92. Nest
93. Chess
94. Happy
96. Uni Matt

98. My Taralay Impression

102. Taralay Initial

104. Wood
108. Urban
108. Strada
109. Spider
110. Diversion
111. Miami


112. Nerok

114. Nerok 55
114. Nerok 70

120. Tarastep Pro

Taralay Multilayered

Premium
See pages 34/53

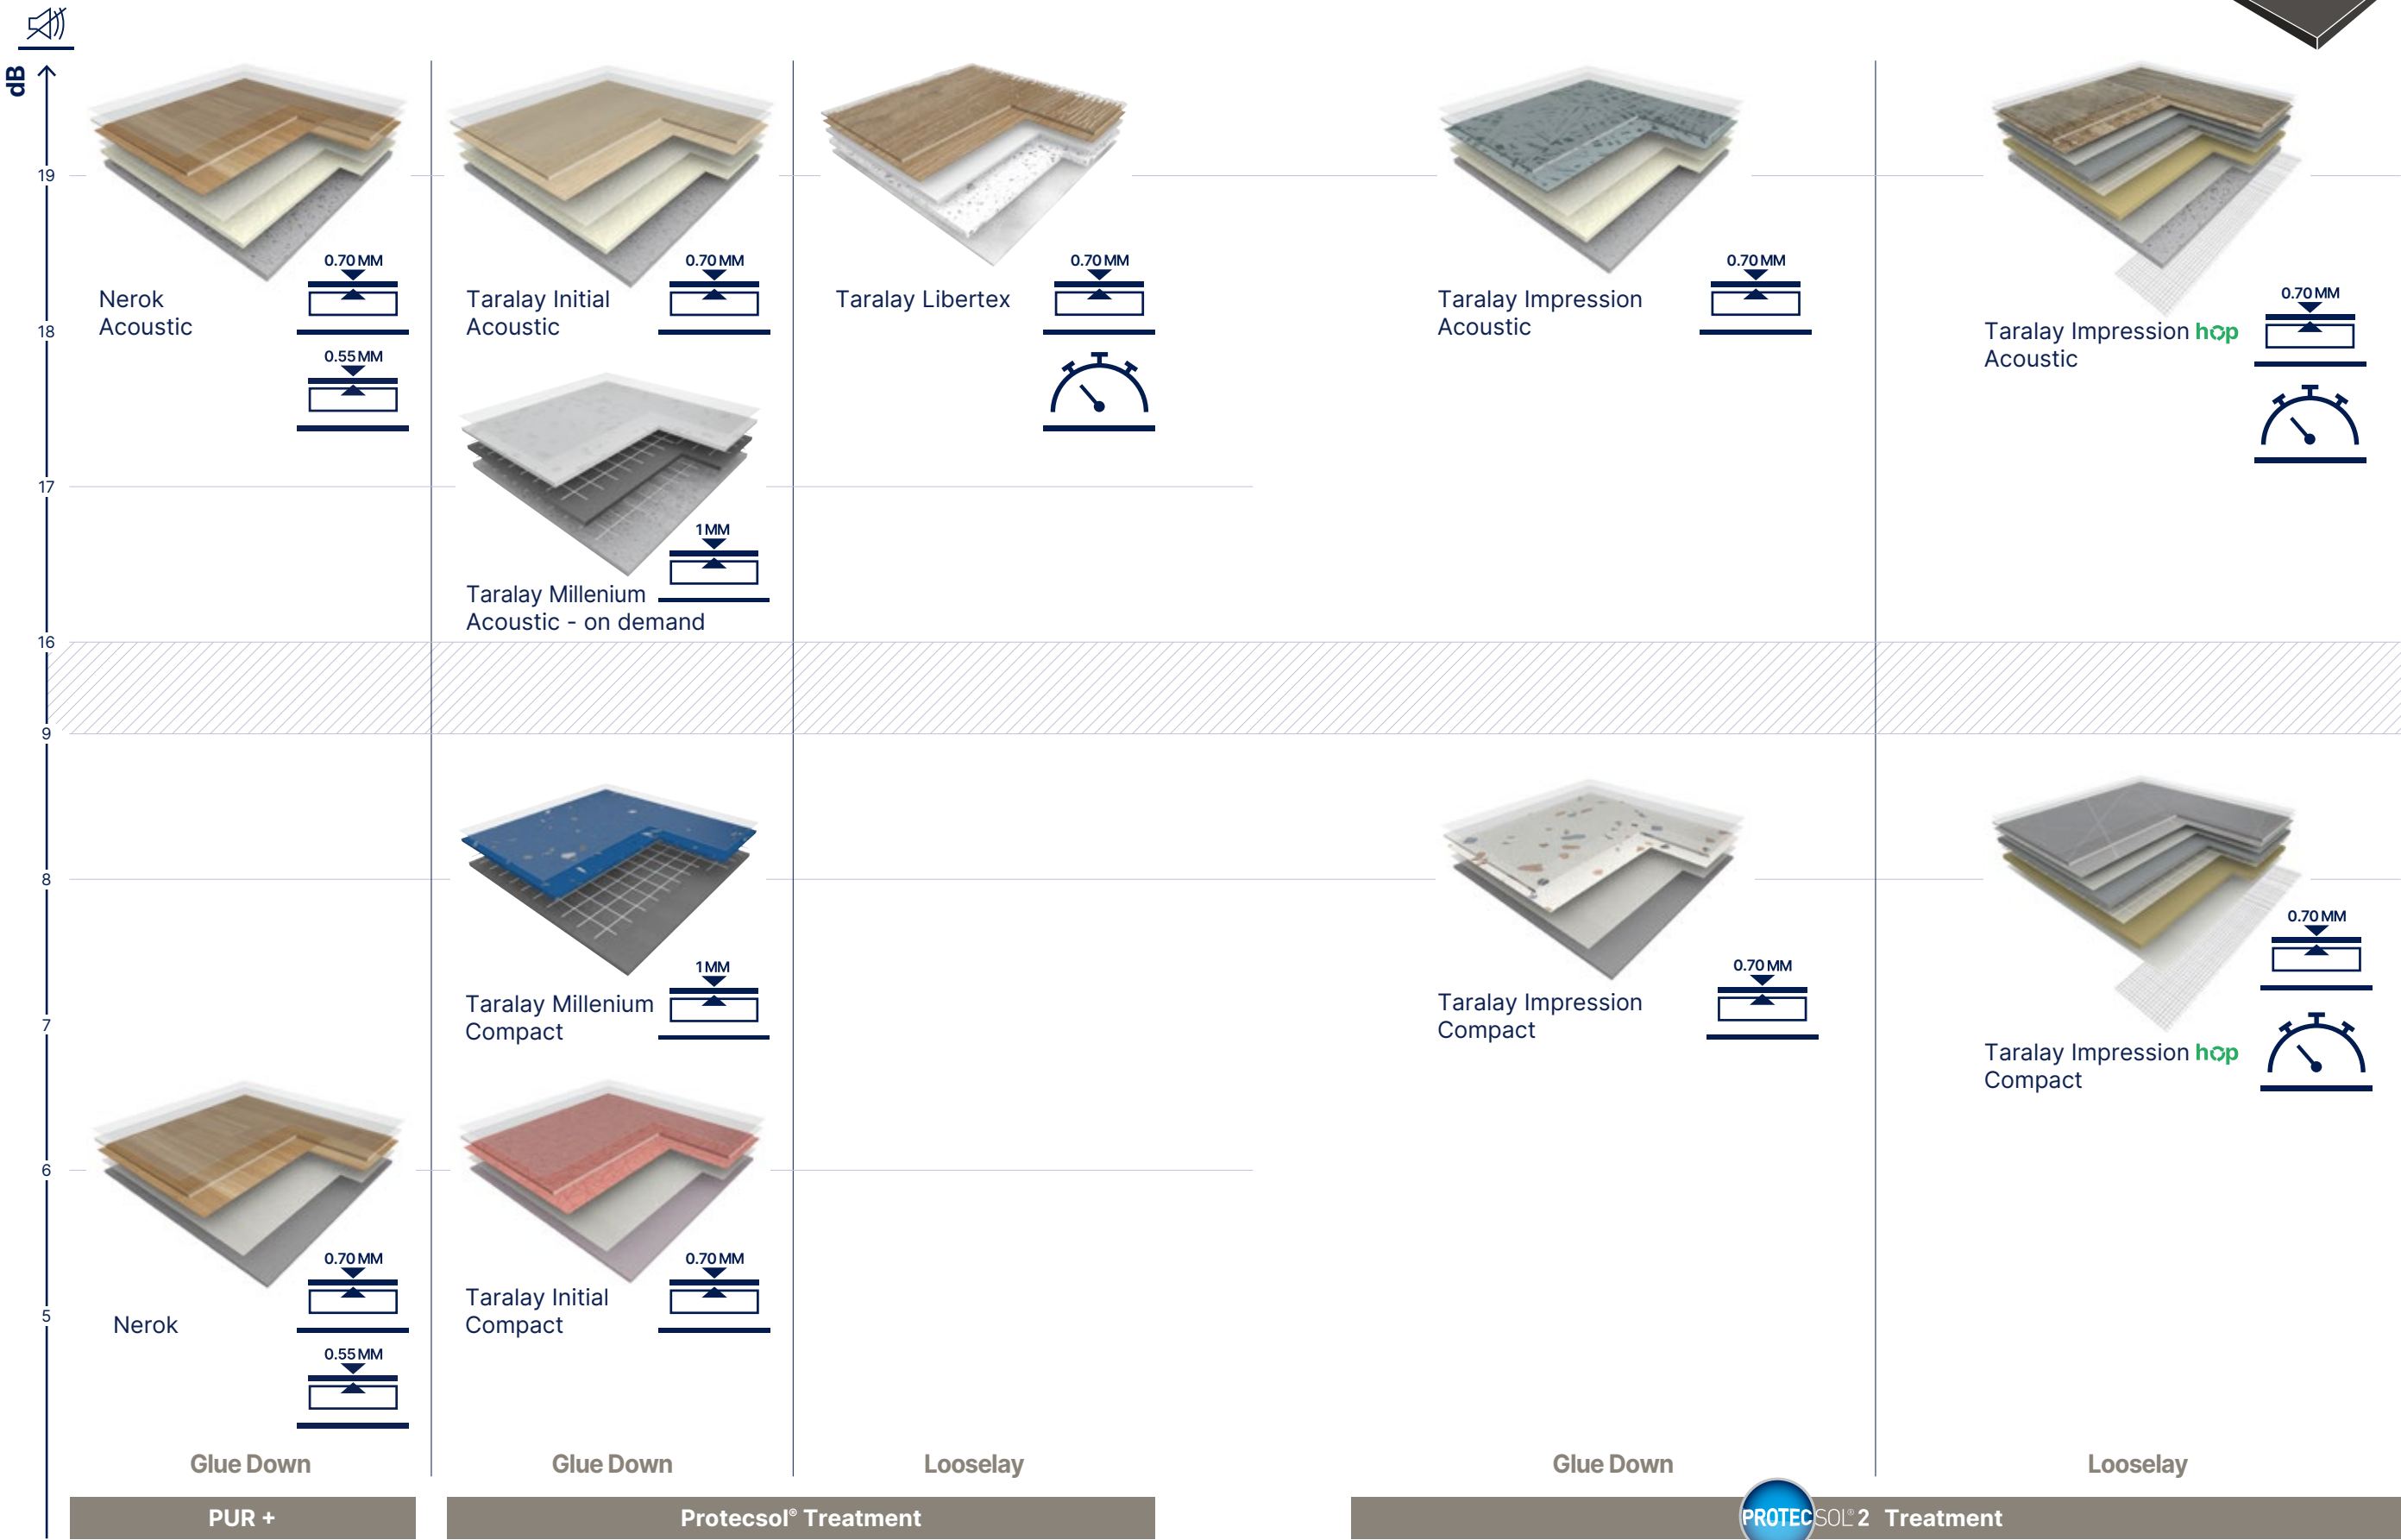


Taralay
Multilayered

Maintenance

Taralay Multilayered

Taralay Initial

Taralay Initial Compact

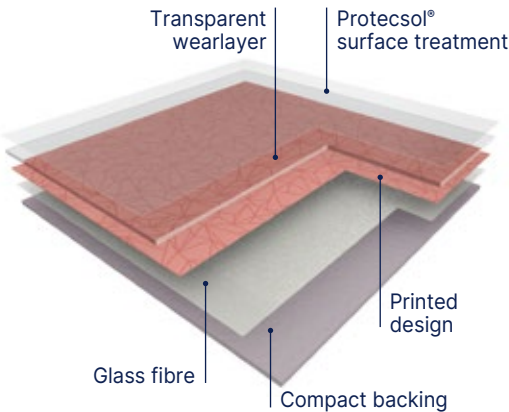

TARALAY INITIAL COMPACT is a multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a compacted backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.70 mm thick). It offers 6 dB sound insulation and an indentation resistance of 0.03 mm.


It is treated with **Protecsol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

According to ISO 21702, **TARALAY INITIAL COMPACT** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.3% after 2h.

According to ISO 22196, **TARALAY INITIAL COMPACT** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

These products do not contain any heavy metals or CMR 1&2 and are 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.

Taralay Initial Acoustic

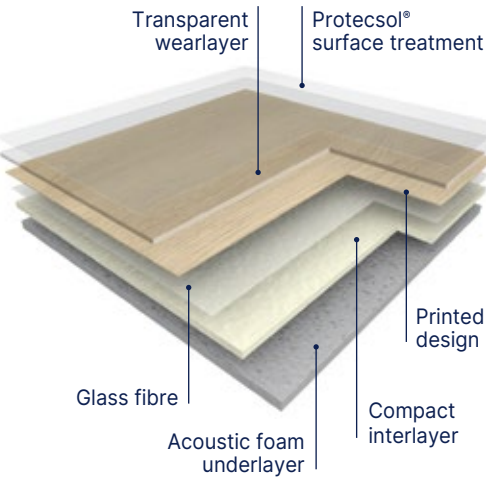

TARALAY INITIAL ACOUSTIC is an acoustic multi-layered vinyl floorcovering, available in 2 m wide sheet, with a group T wear rating.

The product comprises a foam backing reinforced with a glass fibre and a printed design that is protected by a transparent wear layer (0.65 mm thick). It offers **19 dB** sound insulation and an indentation resistance of 0.10 mm.

It is treated with **Protecsol®**, a UV cured surface treatment, which facilitates ease of maintenance and eliminates permanently the need for acrylic emulsion (metallisation).

According to ISO 21702, **TARALAY INITIAL ACOUSTIC** has **anti-viral activity** against Human Coronaviruses: it reduces the number of virus by 99.3% after 2h.

According to ISO 22196, **TARALAY INITIAL ACOUSTIC** has **anti-bacterial activity** against E. coli, S. aureus and MRSA of 99% after 24h.

It does not contain any heavy metals or CMR 1&2 and is 100% compliant with REACH. The products emission rate of volatile organic compounds is < 10 microgram/m³ (TVOC after 28 days – ISO 16000-6). It is 100% recyclable.



Compact



Acoustic

19 dB

Protecsol®



100% recyclable

- All references are available in **Compact** and **Acoustic**
- High resistance to indentation **0.03 mm (Compact)** and **0.10 mm (Acoustic)**
- High impact insulation **6 dB (Compact)** and **19 dB (Acoustic)**
- **Protecsol®** Surface Treatment (easy maintenance & no wax)
- Highest performance in **TVOC emission < 10 microgram/m³**

			Taralay Initial Compact Pro	Taralay Initial Acoustic Pro
Description				
Total thickness	EN ISO 24346	mm	2.00	3.35
Thickness of wearlayer	EN ISO 24340	mm	0.70	0.65
Weight	EN ISO 23997	g/sqm	2635	2825
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	25	25
Classification				
Norm / Product specification	-	-	EN ISO 10582	EN ISO 11638
European classification	EN ISO 10874	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Bfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	≈ 0.10
Impact sound insulation	EN ISO 717-2	dB	6	19
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	Protecsol®	Protecsol®
Chemical products resistance	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽¹⁾	ISO 21702	-	> 99.3% virucidal activity	> 99.3% virucidal activity
Environment / indoor air quality				
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE marking				



EN 14041



(1) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered

Taralay Initial - Wood


Compact


Acoustic

19 dB


Protecsol®


100% recyclable



Filament



0826 Filament Grey
  No plank Continuous design 



0799 Filament Light
  No plank Continuous design 

Renzo



0590 Renzo Steel
  No plank Continuous design 

Esterel



0636 Esterel Blond
  10 cm 



Habana



0797 Habana Ivory
  16.7 cm 



0828 Habana Beige
  16.7 cm 



Noma



0588 Noma Clair
  16.7 cm 



0698 Noma Naturel
  16.7 cm 

Taralay Multilayered

Taralay Initial - Wood

 Compact

 Acoustic

19 dB

Protecsol®


 100% recyclable



Ranch



0773 Ranch
  16.7 cm 

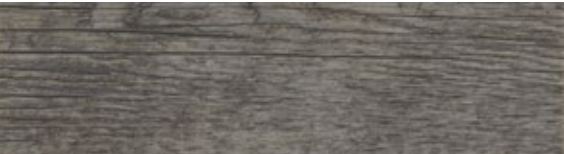


0953 Ranch Anthracite
  16.7 cm 

Bostonian



0961 Bostonian Honey
  20 cm 

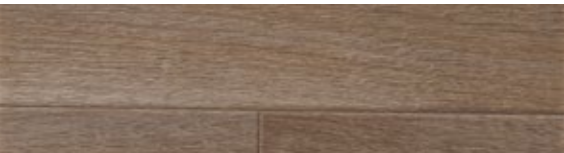

0959 Bostonian Brown
  20 cm 



0960 Bostonian Grey
  20 cm 



Twist



0977 Twist Grey
  16.7 cm 



0979 Twist White
  16.7 cm 



0978 Twist Blond
  16.7 cm 



0980 Twist Brown
  16.7 cm 

Design name	Colour Reference	Colour Name	Pattern Repeat in m	Planks Sizes in cm	
				Length	Width
Bostonian	0959	Brown	1 m x 1 m	100	20
Bostonian	0960	Grey	1 m x 1 m	100	20
Bostonian	0961	Honey	1 m x 1 m	100	20
Esterel	0636	Blond	1 m x 1 m	100	10
Habana	0828	Beige	1 m x 1 m	100	16.7
Habana	0638	Ivory	1 m x 1 m	100	16.7
Noma	0588	Clair	1 m x 1 m	100	16.7
Noma	0698	Naturel	1 m x 1 m	100	16.7
Ranch	0773	Ranch	1 m x 1 m	100	16.7
Ranch	0953	Ranch Anthracite	1 m x 1 m	100	16.7
Twist	0978	Blond	1 m x 1 m	100	16.7
Twist	0980	Brown	1 m x 1 m	100	16.7
Twist	0977	Grey	1 m x 1 m	100	16.7
Twist	0979	White	1 m x 1 m	100	16.7

Taralay Multilayered

Taralay Initial - Urban / Strada

  19 dB   100% recyclable



Urban



0035 Urban Gris   



0037 Urban Souris  



0958 Urban Beige  



Strada



0791 Strada Metallic   



0790 Strada Chrome  



0465 Strada Ciment  

Taralay Initial - Spider




0974 Spider Saphir   



0976 Spider Quartz  



0954 Spider Dore  



0956 Spider Grenat  



0957 Spider Cuivre  



0975 Spider Emeraude  



0955 Spider Perle  



0973 Spider Alu  

Taralay Multilayered

Taralay Initial - Diversion

Compact Acoustic 19 dB Protocolsol® 100% recyclable



0515 Diversion Kiwi



0515 Diversion Kiwi ^ Scale 1



0949 Diversion Soleil



0825 Diversion Turquoise



0049 Diversion Carbone



0962 Diversion Marine



0047 Diversion Ivoire



0824 Diversion Souris

Taralay Initial - Miami



0952 Miami Soleil



0952 Miami Soleil ^ Scale 1



0950 Miami Sable



0963 Miami Perle



0966 Miami Abricot




0968 Miami Ciel



0951 Miami Litchee




0967 Miami Mer



0970 Miami Taupe



0965 Miami Foret



0964 Miami Souris



0969 Miami Paon