



Taralay Multilayered

pages 54-123

58. Taralay Millenium

60. Cosmic
62. Stellar

64. Taralay Libertex

68. Wood
70. Amsterdam
70. Paros
71. Reflect

72. Taralay Impression Taralay Impression hop

78. Wood
84. Cemento
84. Terrazzo
85. Rough
85. Riverside
86. Gentlemen
86. Pure Wool
87. Finesse
88. Envöl
88. Jungle
89. Nido
89. Rice
91. FlipKubes
91. Kubes
92. Metallic
92. Nest
93. Chess
94. Happy
96. Uni Matt

98. My Taralay Impression

102. Taralay Initial

104. Wood
108. Urban
108. Strada
109. Spider
110. Diversion
111. Miami


112. Nerok

114. Nerok 55
114. Nerok 70

120. Tarastep Pro

Taralay Multilayered

Premium
See pages 34/53

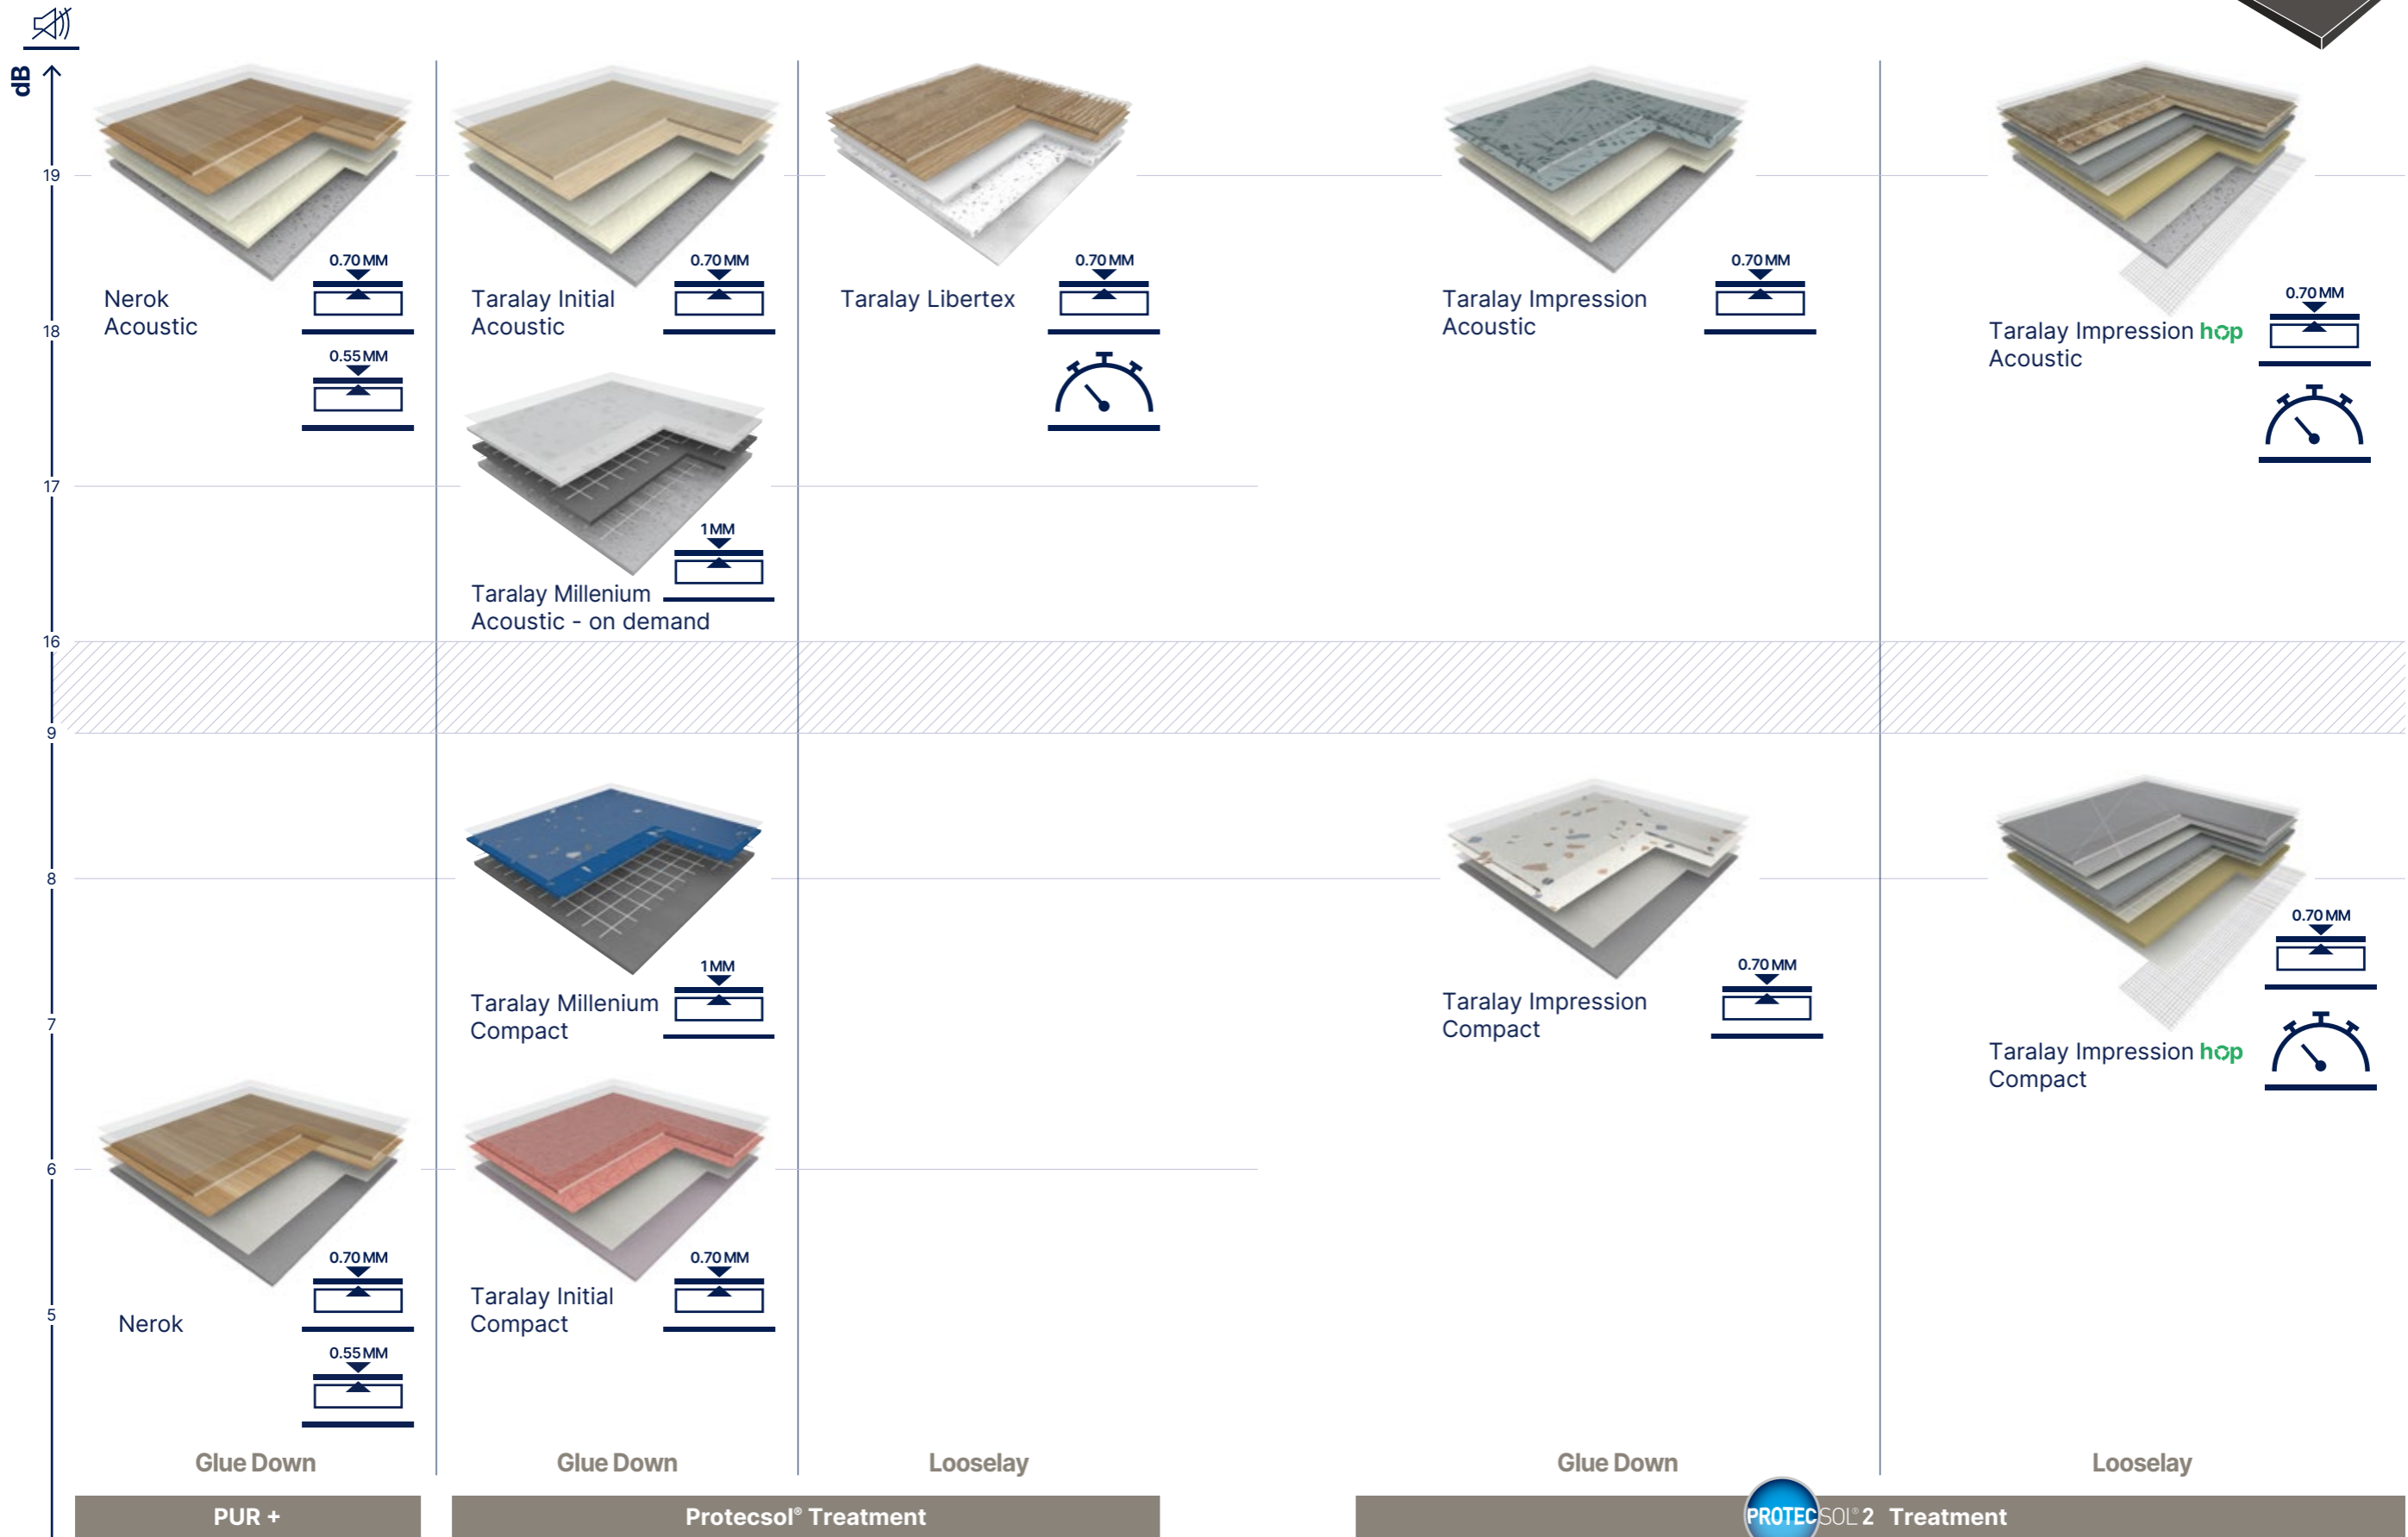

Taralay Multilayered



Maintenance

Taralay Multilayered - fast track installation

Taralay Libertex

All Taralay benefits...



Hygienic & easy maintenance
Protecsol® surface treatment



Comfort
Max³ Layer system



High traffic resistance
0.7 mm wearlayer

34

... with fast track installation




Minimal subfloor preparation
Installation on existing or uneven subfloors



No dry time
Looselay solution



No shutdown
No odor, no glue, minimum facility downtime

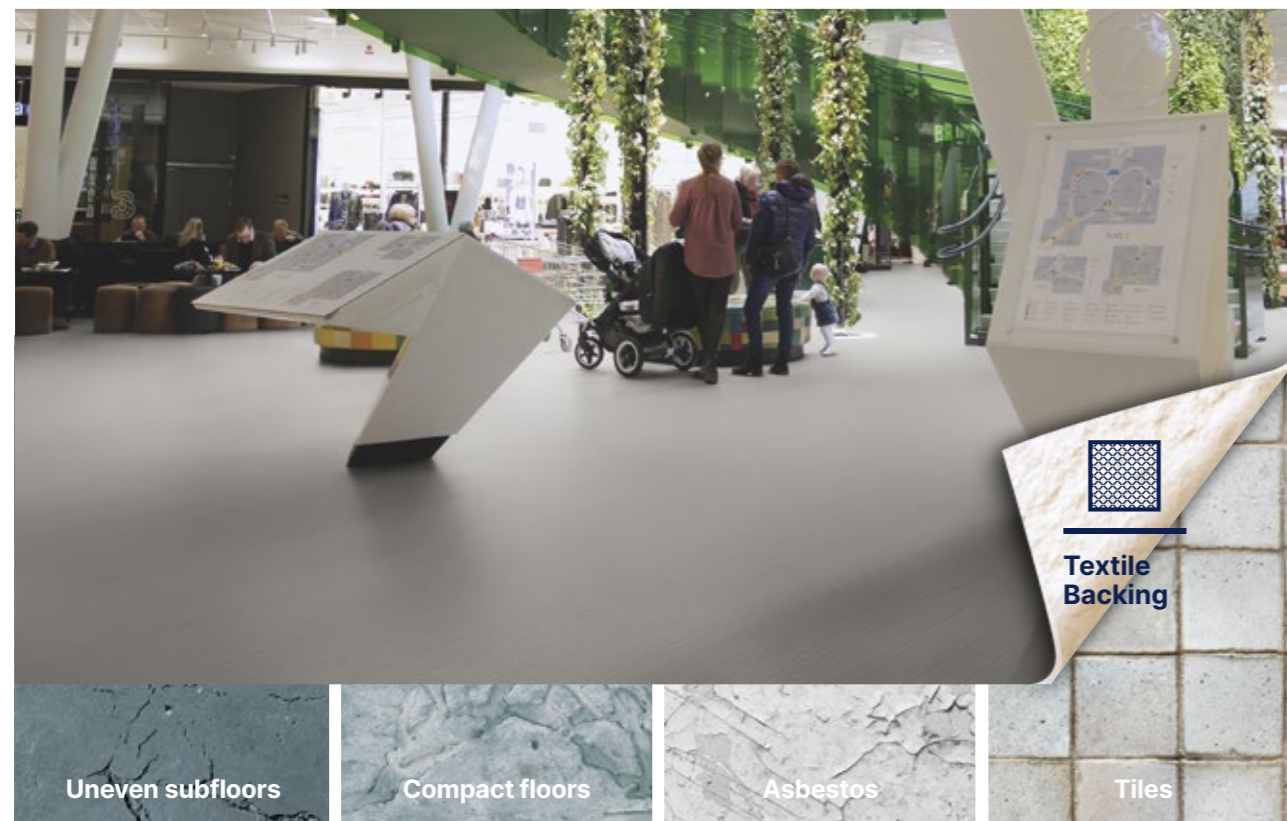

Fast installation in one solution!



Adhesive free
Apply double-sided tape (such as Fix&Free 100 Ref. 058U) on welding area and on room edges



Hot welding
for 100% watertight hygienic system (Ref. CR40 0585)



Cold welding
for invisible joint (see Romus #95605)



Wall transition
• Vynaflex skirtings, ideal for commercial applications (H 60 mm - Ref. 0483 / H 80 mm - Ref. 0482 / H 100 mm - Ref. 0477)
• Coving for 100% watertight hygienic system



Entrance Mats
A new quick & easy installation of entrance mats with Quickmat Tile (Ref. 1725)

More information on gerflor.com

Your sustainable flooring solution!

Circular Economy


- 100% recyclable product
- Recycled content: backing made with recycled PET



= 1m²

Indoor Air Quality


Adhesive Free installation means virtually no VOC!

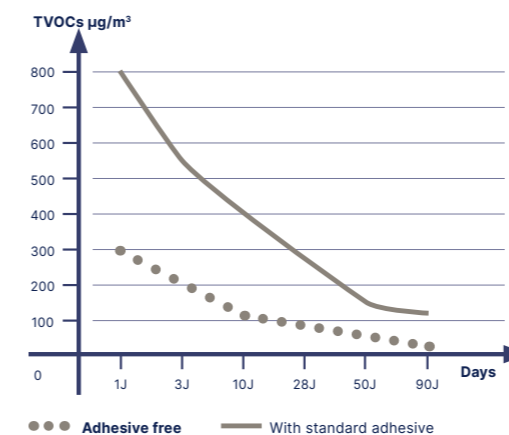

Taralay Multilayered - fast track installation

Taralay Libertex

Taralay Libertex

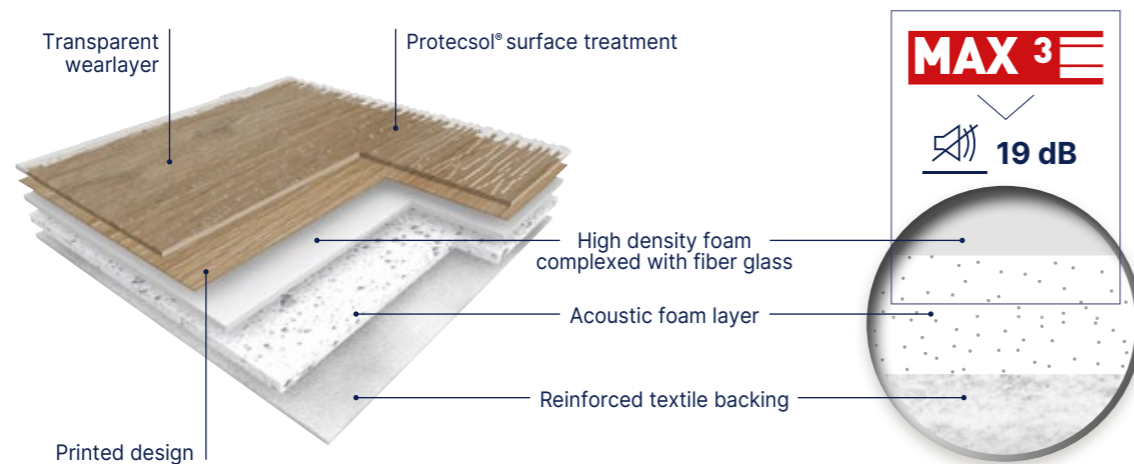

TARALAY LIBERTEX is ideal for fast track installation or renovations in commercial buildings. It is a multi-layered vinyl floorcovering with a printed design protected by a 0.70 mm thick transparent wear layer. The product features a high density foam complexed with fiber glass, an acoustic foam layer and a reinforced textile backing. It offers **19 dB sound insulation**.

It is available in 2 m and 4 m wide sheet, offers a R10 slip resistance and a group T wear rating. It is mechanically embossed, benefits from **Protocols®** surface treatment and has an ultra matt look.

TARALAY LIBERTEX is a worry-free looselay solution. It is laid without glue, simply applying a double-sided tape such as Fix&Free on room edge and at the joint. Its textile backing absorbs surface irregularities requiring minimal subfloor preparation on uneven floors. It is compatible with cold welding, hot welding, coving, and Vynaflex skirtings.

It includes at least 30% mineral materials and 20% renewable materials. Textile backing is made at 95% from recycled PET bottles. It is 100% recyclable and 100% REACH compliant. Its VOC emissions after 28 days (ISO 16000) are below 100 microgram/m³. It is classified A + (the best class) for indoor air quality.



19 dB

Protocols®



100% recyclable

Fast track installation

- Minimal subfloor preparation: textile backing absorbs subfloor irregularities
- No shutdown, no odor, ideal for occupied rooms thanks to looselay installation
- No drying time, no glue

Hygienic and easy maintenance: Protocols® surface treatment

Comfort: 19 dB sound reduction

Libertex

Description			
Total thickness	EN ISO 24346	mm	3.65
Thickness of wearlayer	EN ISO 24340	mm	0.70
Weight	EN ISO 23997	g/sqm	2900
Width of sheet	EN ISO 24341	cm	200/400
Length of sheet	EN ISO 24341	lm	20
Classification			
Norm / Product specification	-	-	EN ISO 11638
European classification	EN ISO 10874	class	34-43
Fire rating	EN 13501-1	class	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10
Performances			
Wear resistance	EN 660.2	mm ³	≤ 2.0
Wear group	-	group	T
Dimensional stability (requirement)	EN ISO 23999	%	≤ 0.40
Dimensional stability (measured value)	-	-	≤ 0.05
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.20
Impact sound insulation	EN ISO 717-2	dB	19
Room impact	NF S 31 074	dB	< 65
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6
Surface treatment	-	-	Protocols®
Chemical products resistance ⁽¹⁾	EN ISO 26987	-	OK
Environment / indoor air quality			
TVOC after 28 days	ISO 16000-6	microgram/m ³	< 100

CE marking



EN 14041



Textile Backing

(1) Regarding the resistance to chemicals, please download the corresponding leaflet from our website.
 (2) The implementation of an effective cleaning regime is the most important defence against infection.

Taralay Multilayered - fast track installation

Taralay Libertex - Wood

 19 dB
  Protocolsol®
  100% recyclable



Textile Backing



2247 Hossegor Latte

Legend



1430 - Legend Grey



No plank
Continuous design



2243 - Legend Chestnut



No plank
Continuous design




2242 - Legend Country



No plank
Continuous design

Cocoon

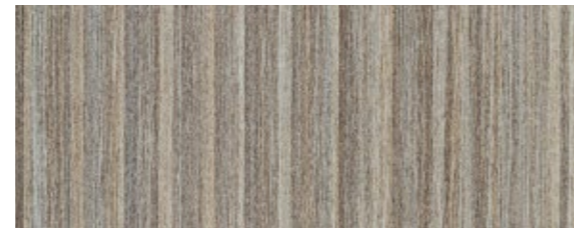

2241 - Cocoon Silver Brown



No plank
Continuous design

Hossegor



2247 - Hossegor Latte



10 × 100-67-33.3 cm

Taralay Libertex - Wood

 19 dB
  Protocolsol®
  100% recyclable



Textile Backing



2245 Skandi Oak Natural

Skandi Oak



2244 - Skandi Oak Clear



20 × 133.3 cm



2245 - Skandi Oak Natural



20 × 133.3 cm




2246 - Skandi Oak Toffee



20 × 133.3 cm

Pure Oak

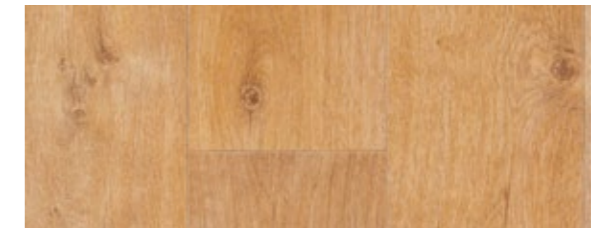

0720 - Pure Oak Clear



16 × 100 cm



1751 - Pure Oak Grey



16 × 100 cm

Taralay Multilayered - fast track installation

Taralay Libertex - Amsterdam / Paros



 19 dB **Protecsol®**  100% recyclable





Amsterdam




2151 Amsterdam Light Grey 



2152 Amsterdam Grey 



2153 Amsterdam Anthracite 



Paros




2248 Paros Clear 



Taralay Libertex - Reflect



 19 dB **Protecsol®**  100% recyclable

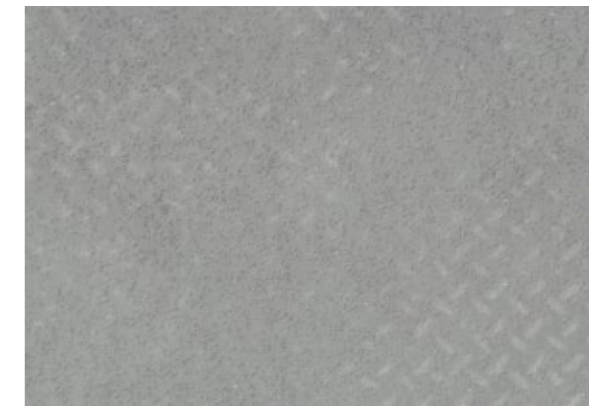

2253 Reflect Silver 





2249 Reflect Sea 



2252 Reflect Forest 



2251 Reflect Sunny 



1785 Reflect Earth 



2252 Reflect Flower 