




Taralay Multilayered

pages 54-123

- 58. Taralay Millenium**
 - 60. Cosmic
 - 62. Stellar
- 64. Taralay Libertex**
 - 68. Wood
 - 70. Amsterdam
 - 70. Paros
 - 71. Reflect
- 72. Taralay Impression**
 - Taralay Impression hop**
 - 78. Wood
 - 84. Cemento
 - 84. Terrazzo
 - 85. Rough
 - 85. Riverside
 - 86. Gentlemen
 - 86. Pure Wool
 - 87. Finesse
 - 88. Envol
 - 88. Jungle
 - 89. Nido
 - 89. Rice
 - 91. FlipKubes
 - 91. Kubes
 - 92. Metallic
 - 92. Nest
 - 93. Chess
 - 94. Happy
 - 96. Uni Matt
- 98. My Taralay Impression**
- 102. Taralay Initial**
 - 104. Wood
 - 108. Urban
 - 108. Strada
 - 109. Spider
 - 110. Diversion
 - 111. Miami
- 112. Nerok**
 - 114. Nerok 55
 - 114. Nerok 70
- 120. Tarastep Pro**

Taralay Multilayered

Premium
See pages 34/53

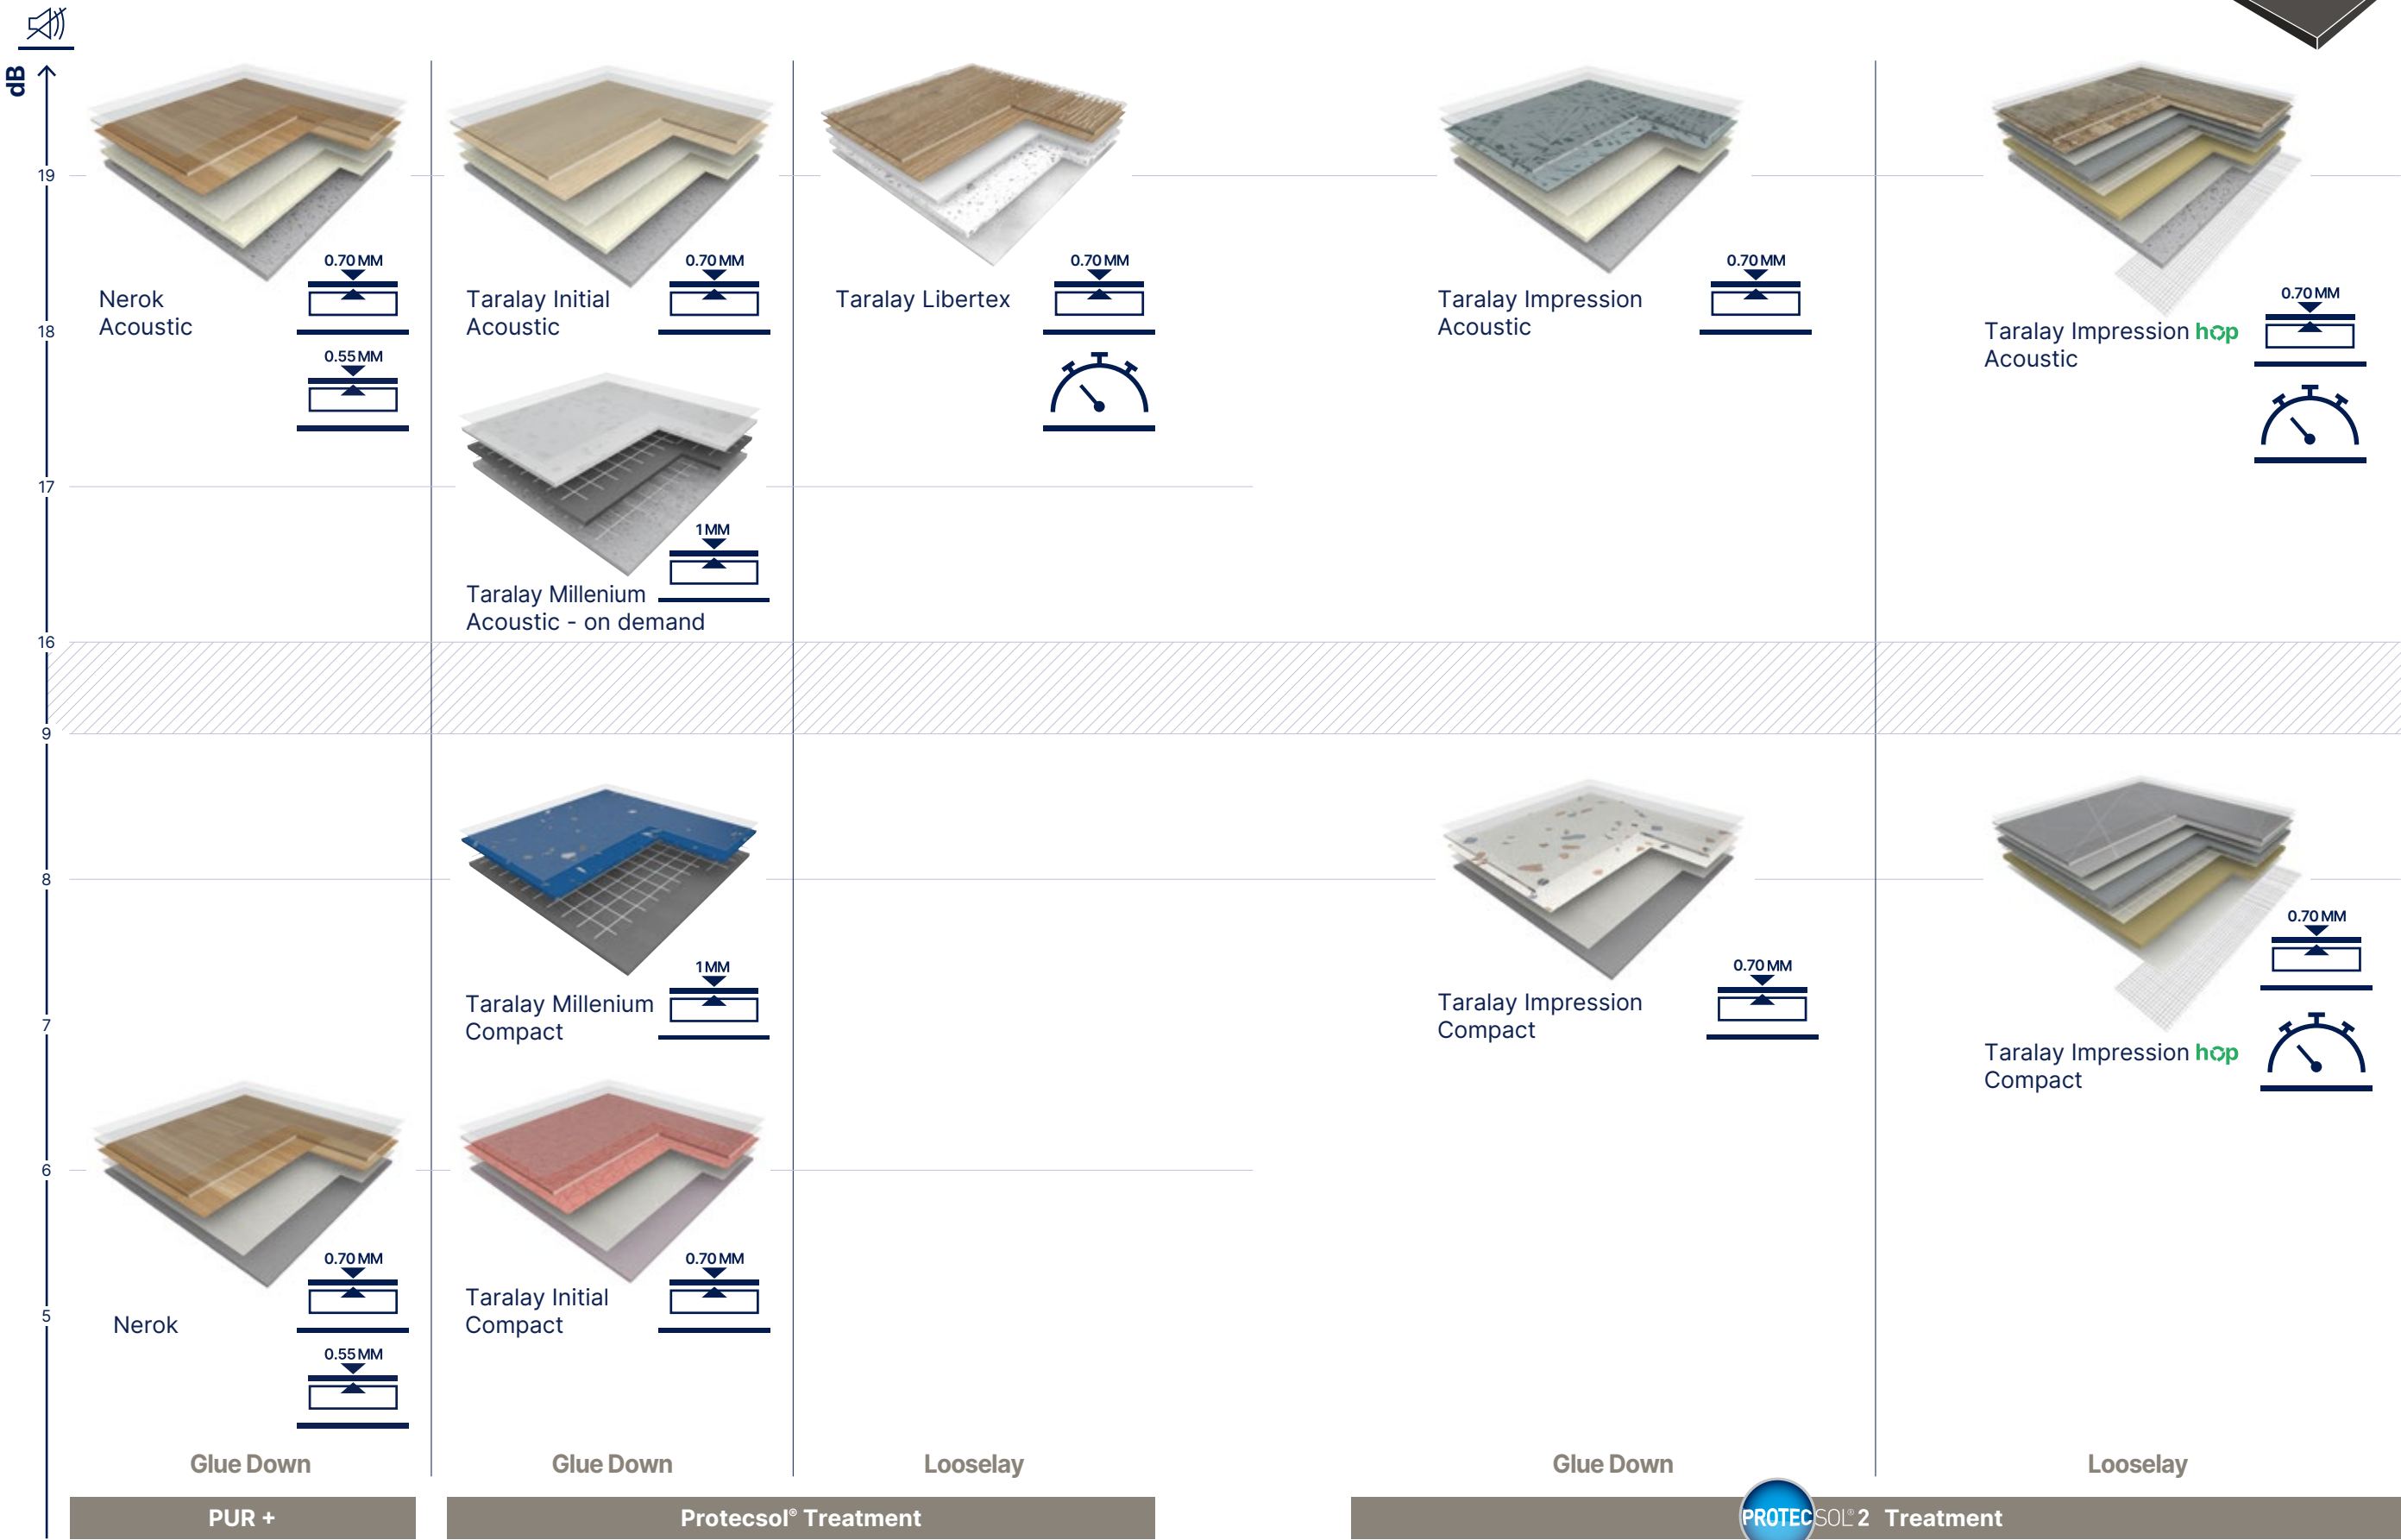


Taralay
Multilayered

Maintenance

Taralay Multilayered

Taralay Millenium

Taralay Millenium Compact

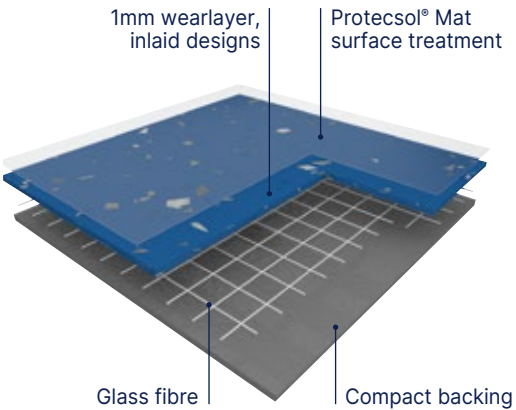


TARALAY MILLENIUM COMPACT is a multilayered vinyl floor covering available in 2m wide sheet, with a group T wear rating. The product comprises a **1 mm thick coated wear layer, made of pure vinyl, coloured throughout its thickness (no transparent wear layer and no filler)**. Its complete thickness is 2 mm. It is reinforced with a fibre glass grid for a better dimensional stability. The construction of the product yields a 8dB sound insulation rating and a **resistance to indentation of 0.03 mm**.

This flooring is protected by the surface treatment, **ProtecSol® Mat**, with a minimum thickness of 13µm, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It is composed of 50% mineral and inexhaustible materials. It does not contain any heavy metals or CMR 1&2 components and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is <10 micrograms/m³ (TVOC after 28 days ISO 16000-6).

It is 100% recyclable.

Taralay Millenium Acoustic (on demand)

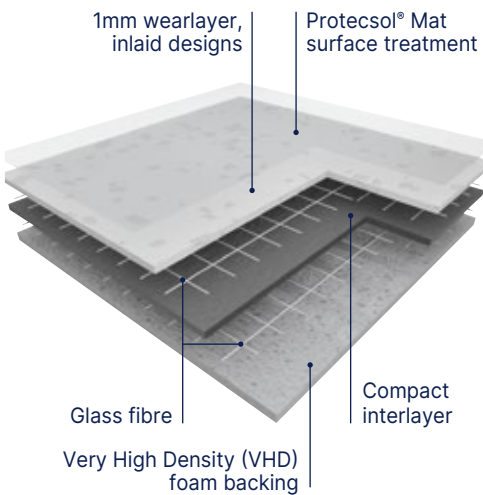

TARALAY MILLENIUM ACOUSTIC is a multilayered vinyl floorcovering available in 2m wide sheet, with a group T wear rating. The product comprises a **1 mm thick coated wear layer, made of pure vinyl, coloured throughout its thickness (no transparent wear layer and no filler)**. Its complete thickness is 3.4 mm. It contains a Very High Density (VHD) foam backing and is reinforced with 2 fibre glass grids which yields a **17dB sound insulation** rating and a **resistance to indentation of 0.07 mm**.

This flooring is protected by the surface treatment, **ProtecSol® Mat**, with a minimum thickness of 13µm, ensuring easy maintenance and no required polish for the entire lifetime of the product.

It is composed of 50% mineral and inexhaustible materials. It does not contain any heavy metals or CMR 1&2 components and it is 100% compliant with REACH. The product emission rate of volatile organic compounds is <10 micrograms/m³ (TVOC after 28 days ISO 16000-6).

It is 100% recyclable.



- **Design within the whole thickness – no filler**
Outstanding abrasion resistance
- **Very high density (VHD) foam backing**
Easy rolling for loads
- **ProtecSol® Mat Surface Treatment**
Easy cleaning
- **100 % Recyclable**
Eco-responsible solutions

			Taralay Millenium Compact	Taralay Millenium Acoustic*
Description				
Total thickness	EN ISO 24346	mm	2.00	3.40
Thickness of wearlayer	EN ISO 24340	mm	1	1
Weight	EN ISO 23997	g/sqm	2725	3385
Width of sheet	EN ISO 24341	cm	200	200
Length of sheet	EN ISO 24341	lm	20	25
Classification				
Norm / Product specification	-	-	EN ISO 10582	ISO 11638 (EN 651)
European classification	EN ISO 10874	class	34-43	34-42
Fire rating	EN 13501-1	class	Bfl-s1	Cfl-s1
Static electrical propensity	EN 1815	kV	< 2	< 2
Slip resistance wet	EN 16165:2021 – Appendix B (DIN 51 130)	class	R10	R10
Performances				
Wear resistance	EN 660.2	mm³	≤ 2.0	≤ 2.0
Wear group	-	group	T	T
Type Binder content	EN ISO 10582	type	I	-
Dimensional stability	EN ISO 23999	%	≤ 0.40	≤ 0.40
Residual indentation (requirement)	EN ISO 24343-1	mm	≤ 0.10	≤ 0.20
Residual indentation (average measured value)	-	mm	≈ 0.03	0,07
Impact sound insulation	EN ISO 717-2	dB	8	17
Castor chair test (type H)	ISO 4918	-	OK	OK
Thermal conductivity	EN ISO 10456	W/(m.k)	0.25	0.25
Colour fastness	EN ISO 105-B02	degree	≥ 6	≥ 6
Surface treatment	-	-	ProtecSol® Mat	ProtecSol® Mat
Chemical products resistance	EN ISO 26987	-	OK	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99% inhibits growth	> 99% inhibits growth
Anti-viral activity (human coronavirus) after 2h ⁽¹⁾	ISO 21702	-	> 99.3% virucidal activity	> 99.3% virucidal activity
Environment / indoor air quality				
TVOC after 28 days	ISO 16000-6	microgram/m³	< 10	< 10
Certification	-	-	Floorscore®	Floorscore®
CE marking				




(1) The implementation of an effective cleaning regime is the most important defence against infection.
*available on demand (minimum order quantity : 1000 sqm)

Taralay Multilayered

Taralay Millenium - Cosmic

Compact Acoustic* 17 dB VHD Protocols® Mat 100% recyclable

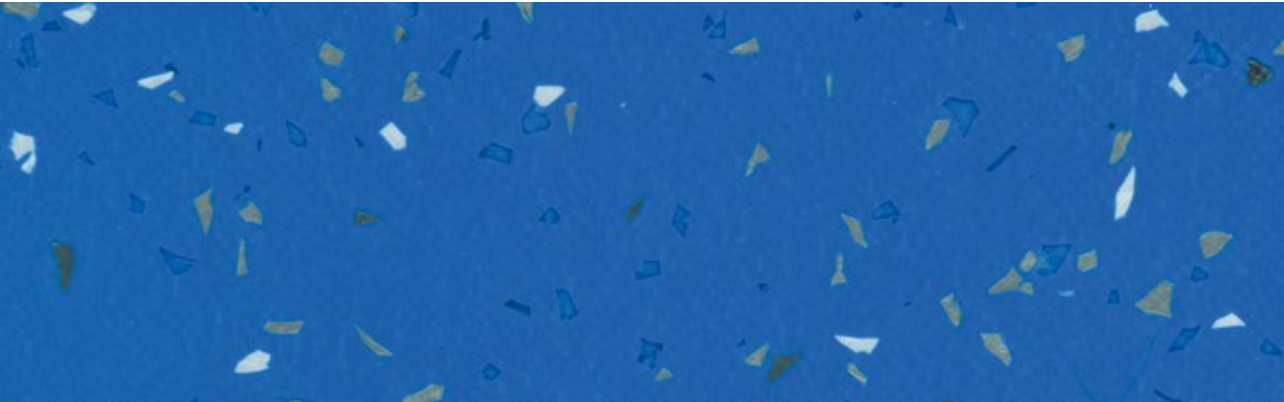


5718 Pallas © ^ Scale 1



Pallas



8856 Pandore ©



5728 Ilias ©



5723 Lotis ©



5721 Fortuna ©



3442 Doris ©



3438 Iris ©



4162 Adonis ©



4038 Delia ©




4369 Egeria ©




4036 Vesta ©




4368 Astree ©



4037 Gyptis ©




4533 Ceres ©



3435 Nemesis ©



4161 Hilda ©



4160 Hermione ©




4159 Kalliope ©



8645 Bianca ©



4374 Aria ©



4532 Sylvia ©



4531 Camilla ©

*Acoustic: available on demand (minimum order quantity : 1000 sqm)

Taralay Multilayered

Taralay Millenium - Stellar



17 dB



Protecsol® Mat

 100% recyclable



4163 Flore  ^ Scale 1



3446 Eden 



4039 Pan 



5724 Chicago 



4200 Apolon 




4373 Fudo 



4372 Boree 



4164 Eros 



3439 Europa 



5726 Yuna 



5725 Freia 

*Acoustic: available on demand (minimum order quantity : 1000 sqm)